ICOM®

SERVICE MANUAL

VHF MARINE TRANSCEIVER

IC-M422

Icom Inc.

INTRODUCTION

This service manual describes the latest service information for the **IC-M422** VHF MARINE TRANSCEIVER at the time of publication.

MODEL	COLORS	SYMBOL
IC-M422	BLACK	[BLK]
	SUPER WHITE	[SW]

To upgrade quality, all electrical or mechanical parts and internal circuits are subject to change without notice or obligation.

DANGER

NEVER connect the transceiver to an AC outlet or to a DC power supply that uses more than 16 V. Such a connection could cause a fire or electric hazard.

DO NOT reverse the polarities of the power supply when connecting the transceiver.

DO NOT apply an RF signal of more than 20 dBm (100 mW) to the antenna connector. This could damage the transceiver's front end.

ORDERING PARTS

Be sure to include the following four points when ordering replacement parts:

1. 10-digit order numbers
2. Component part number and name
3. Equipment model name and unit name
4. Quantity required

<SAMPLE ORDER>

5030002790 LCD	A0286	IC-M422	Main unit 5 pieces
8810009510 Screw	BO 2x4 NIxZU (BT)	IC-M422	Chassis 10 pieces

Addresses are provided on the inside back cover for your convenience.

REPAIR NOTES

1. Make sure the problem is internal before dis-assembling the transceiver.
2. **DO NOT** open the transceiver until the transceiver is disconnected from its power source.
3. **DO NOT** force any of the variable components. Turn them slowly and smoothly.
4. **DO NOT** short any circuits or electronic parts. An insulated turning tool **MUST** be used for all adjustments.
5. **DO NOT** keep power ON for a long time when the transceiver is defective.
6. **DO NOT** transmit power into a signal generator or a sweep generator.
7. **ALWAYS** connect a 30 dB to 40 dB attenuator between the transceiver and a deviation meter or spectrum analyzer when using such test equipment.
8. **READ** the instructions of test equipment thoroughly before connecting equipment to the transceiver.

Icom, Icom Inc. and ICOM logo are registered trademarks of Icom Incorporated (Japan) in the United States, the United Kingdom, Germany, France, Spain, Russia and/or other countries.

TABLE OF CONTENTS

SECTION 1 SPECIFICATIONS

SECTION 2 INSIDE VIEWS

SECTION 3 DISASSEMBLY INSTRUCTIONS

SECTION 4 CIRCUIT DESCRIPTION

4-1 RECEIVER CIRCUITS 4-1
4-2 TRANSMITTER CIRCUITS 4-2
4-3 PLL CIRCUITS 4-3
4-4 DSC CIRCUITS 4-3
4-5 PUBLIC ADDRESS (PA) CIRCUIT 4-3
4-6 POWER SUPPLY CIRCUITS 4-4
4-7 CPU PORT ALLOCATIONS 4-4

SECTION 5 ADJUSTMENT PROCEDURES

5-1 PREPARATION 5-1
5-2 FREQUENCY ADJUSTMENT 5-2
5-3 TRANSMIT ADJUSTMENT 5-3
5-4 RECEIVE ADJUSTMENT 5-4

SECTION 6 PARTS LIST

6-1 IC-M422 6-1
6-2 HM-150B/SW 6-5

SECTION 7 MECHANICAL PARTS AND DISASSEMBLY

SECTION 8 SEMICONDUCTOR INFORMATION

SECTION 9 BOARD LAYOUTS

9-1 LOGIC BOARD 9-1
9-2 HM-150B/SW 9-1
9-3 VR BOARD 9-3
9-4 SQL BOARD 9-3
9-5 MAIN UNIT 9-3

SECTION 10 BLOCK DIAGRAM

SECTION 11 VOLTAGE DIAGRAM

11-1 MAIN UNIT 11-1
11-2 LOGIC BOARD 11-3

SECTION 12 HM-150B/SW

12-1 MECHANICAL PARTS AND DISASSEMBLY 12-1
12-2 VOLTAGE DIAGRAM 12-1

SECTION 1 SPECIFICATIONS

■ GENERAL

• Frequency coverage	: TX 156.025–157.425 MHz RX 156.050–163.275 MHz
• Type of emission	: 16K0G3E, 16K0G2B (DSC)
• Antenna impedance	: 50 Ω (Nominal)
• Operating temperature range	: –4˚F to +140˚F
• Power supply requirement	: 13.8 V DC ±15% (negative ground)
• Current drain (At 13.8 V DC ; approx.)	: Receiving 1.5 A (at max. audio) Transmitting 5.5 A (at 25 W)
• Dimensions (Projections not included)	: 6 15/32 (W)×3 1/16 (H)×5 15/32 (D) in.
• Weight (Approx.)	: 2 lb 5 3/4 oz.

■ TRANSMITTER

• Output power (At 13.8 V DC)	: 25 W (High)/1 W (Low)
• Modulation	: Variable reactance frequency modulation
• Maximum frequency deviation	: ±5.0 kHz
• Frequency error	: Less than ±10 ppm
• Spurious emissions	: Less than 70 dBc
• Adjacent channel power	: More than 70 dB
• Audio harmonic distortion	: Less than 10% (at 60% deviation)
• Residual modulation	: More than 40 dB
• Audio frequency response	: +1 dB to –3 dB of 6 dB oct. from 300 Hz to 2500 Hz
• Microphone impedance	: 2 kΩ

■ RECEIVER

• Receive system	: Double conversion superheterodyne system
• Intermediate frequencies	: 1st IF: 21.7 MHz, 2nd IF: 450 kHz
• Sensitivity	: –13 dBμ typical at 12 dB SINAD
• Squelch sensitivity (At threshold)	: Less than –13 dBμ
• Adjacent channel selectivity	: More than 70 dB
• Spurious response	: More than 70 dB
• Intermodulation rejection ratio	: More than 70 dB
• Hum and Noise	: More than 40 dB
• Audio frequency response	: +1 dB to –3 dB of 6 dB oct. from 300 Hz to 3000 Hz
• Audio output power	: 4.5 W typical at 10% distortion with a 4 Ω load
• Output impedance (Audio)	: 4 Ω

Specifications are measured in accordance with TIA/EIA 603

All stated specifications are subject to change without notice or obligation.

• CHANNEL LISTS

Channel number			Frequency (MHz)	
USA	INT	CAN	Transmit	Receive
	01	01	156.050	160.650
01A			156.050	156.050
	02	02	156.100	160.700
	03	03	156.150	160.750
03A			156.150	156.150
	04		156.200	160.800
		04A	156.200	156.200
	05		156.250	160.850
05A		05A	156.250	156.250
06	06	06	156.300	156.300
	07		156.350	160.950
07A		07A	156.350	156.350
08	08	08	156.400	156.400
09	09	09	156.450	156.450
10	10	10	156.500	156.500
11	11	11	156.550	156.550
12	12	12	156.600	156.600
13[*2]	13	13[*1]	156.650	156.650
14	14	14	156.700	156.700
15[*2]	15[*1]	15[*1]	156.750	156.750
16	16	16	156.800	156.800
17[*1]	17	17[*1]	156.850	156.850
	18		156.900	161.500
18A		18A	156.900	156.900
	19		156.950	161.550

Channel number			Frequency (MHz)	
USA	INT	CAN	Transmit	Receive
19A		19A	156.950	156.950
20	20	20[*1]	157.000	161.600
20A			157.000	157.000
	21	21	157.050	161.650
21A		21A	157.050	157.050
		21b	Rx only	161.650
	22		157.100	161.700
22A		22A	157.100	157.100
	23	23	157.150	161.750
23A			157.150	157.150
24	24	24	157.200	161.800
25	25	25	157.250	161.850
		25b	Rx only	161.850
26	26	26	157.300	161.900
27	27	27	157.350	161.950
28	28	28	157.400	162.000
		28b	Rx only	162.000
	60	60	156.025	160.625
	61		156.075	160.675
61A		61A	156.075	156.075
	62		156.125	160.725
		62A	156.125	156.125
	63		156.175	160.775
63A			156.175	156.175
	64	64	156.225	160.825

Channel number			Frequency (MHz)	
USA	INT	CAN	Transmit	Receive
64A		64A	156.225	156.225
	65		156.275	160.875
65A	65A	65A	156.275	156.275
	66		156.325	160.925
66A	66A	66A[*1]	156.325	156.325
67[*2]	67	67	156.375	156.375
68	68	68	156.425	156.425
69	69	69	156.475	156.475
70[*3]	70[*3]	70[*3]	156.525	156.525
71	71	71	156.575	156.575
72	72	72	156.625	156.625
73	73	73	156.675	156.675
74	74	74	156.725	156.725
77[*1]	77	77[*1]	156.875	156.875
	78		156.925	161.525
78A		78A	156.925	156.925
	79		156.975	161.575
79A		79A	156.975	156.975
	80		157.025	161.625
80A		80A	157.025	157.025
	81		157.075	161.675
81A		81A	157.075	157.075
	82		157.125	161.725
82A		82A	157.125	157.125
	83	83	157.175	161.775

Channel number			Frequency (MHz)	
USA	INT	CAN	Transmit	Receive
83A		83A	157.175	157.175
		83b	Rx only	161.775
84	84	84	157.225	161.825
84A			157.225	157.225
85	85	85	157.275	161.875
85A			157.275	157.275
86	86	86	157.325	161.925
86A			157.325	157.325
87	87	87	157.375	161.975
87A			157.375	157.375
88	88	88	157.425	162.025
88A			157.425	157.425

WX channel	Frequency (MHz)	
	Transmit	Receive
1	RX only	162.550
2	RX only	162.400
3	RX only	162.475
4	RX only	162.425
5	RX only	162.450
6	RX only	162.500
7	RX only	162.525
8	RX only	161.650
9	RX only	161.775
10	RX only	163.275

[*1]Low power only. [*2]Momentary high power. [*3]DSC operation only

NOTE: Simplex channels, 3, 21, 23, 61, 64, 81, 82 and 83 **CANNOT** be lawfully used by the general public in U.S.A. waters.

SECTION 2 INSIDE VIEWS

• MAIN UNIT

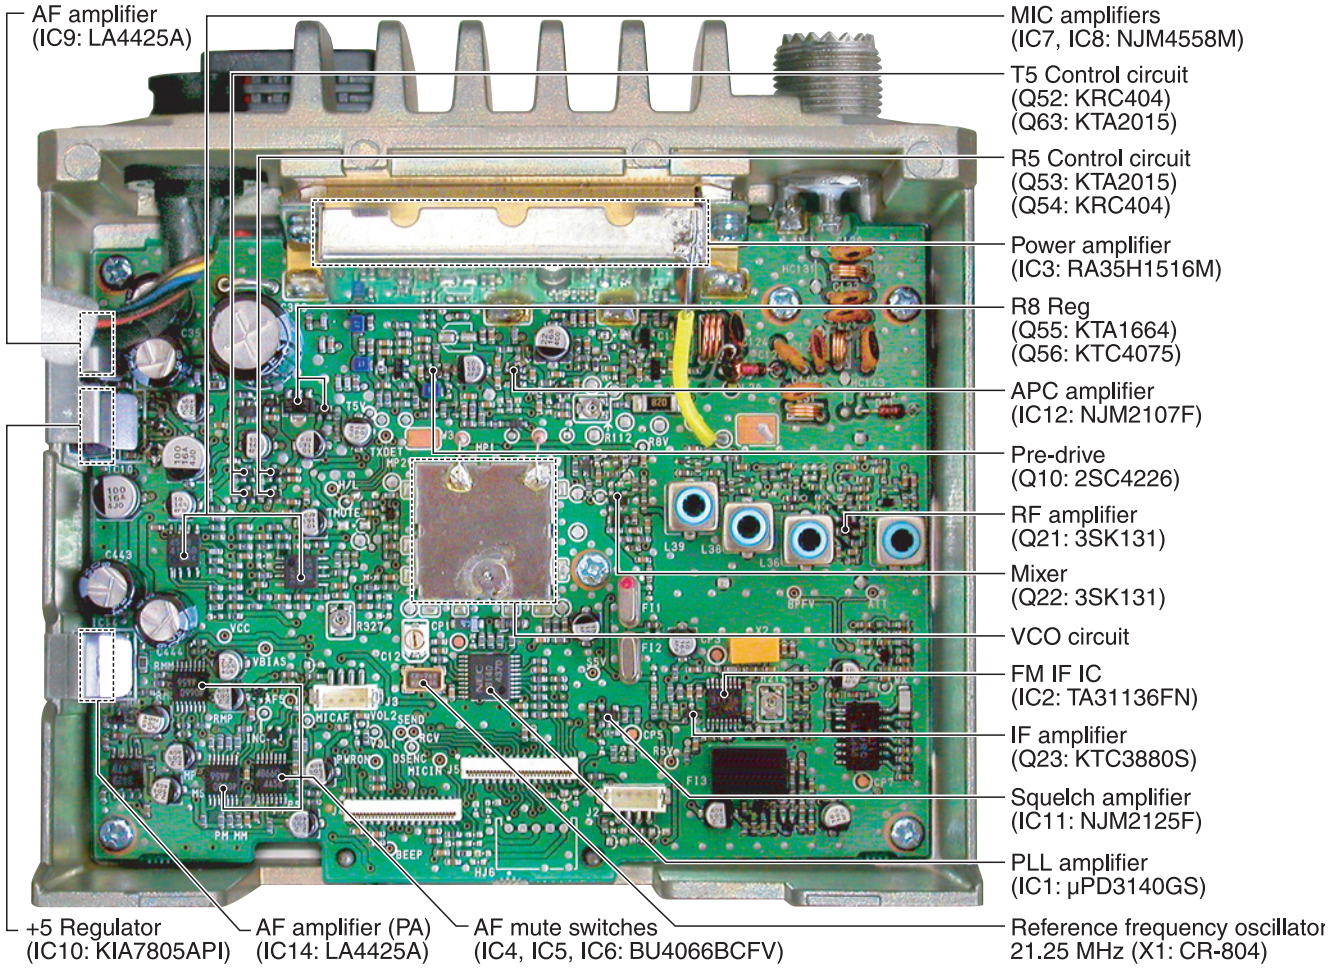

• FRONT UNIT

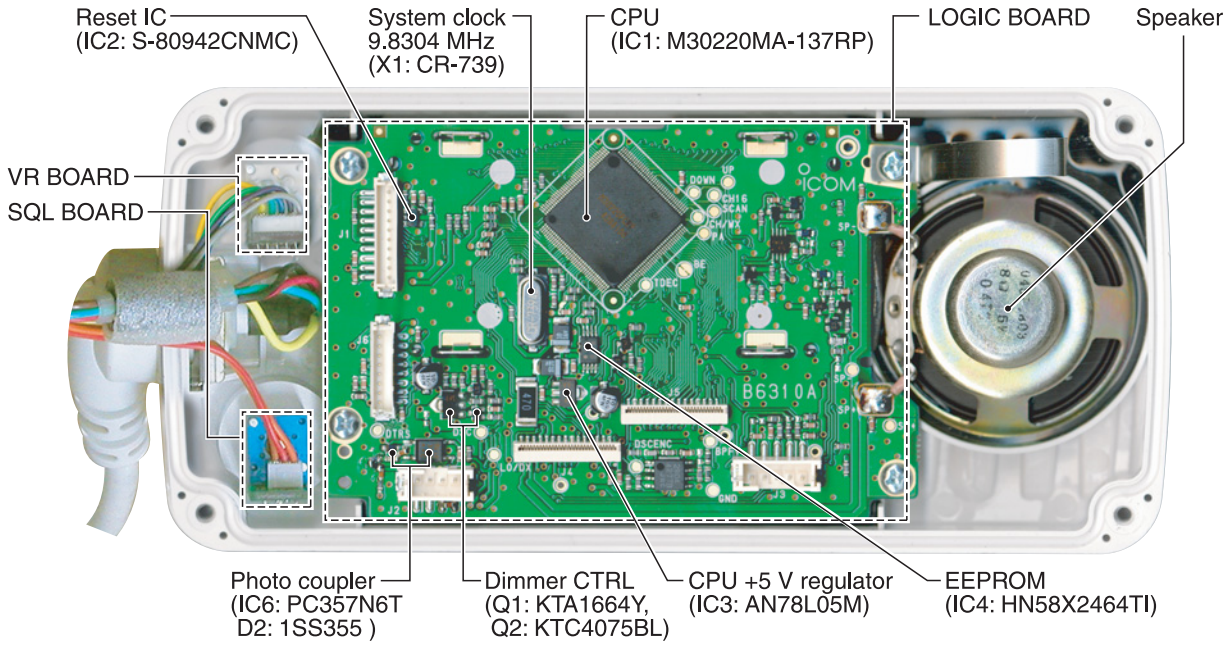

SECTION 3 DISASSEMBLY INSTRUCTIONS

● REMOVING THE CASE

① Unscrew 4 screws, Ⓐ.
Note: When replacing the screws, 0.6–0.8 (N.m) of torque MUST be applied to ensure water resistance.
② Slide the case in the direction of the arrow to separate the front pannel.

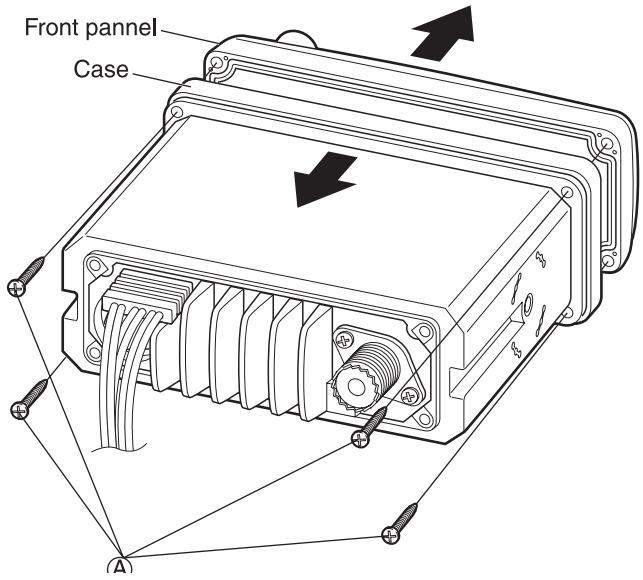

③ Unscrew 4 screws, Ⓑ.
Note: When replacing the screws, 0.6–0.8 (N.m) of torque MUST be applied to ensure water resistance.
④ Slide the case in the direction of the arrow to remove the case.

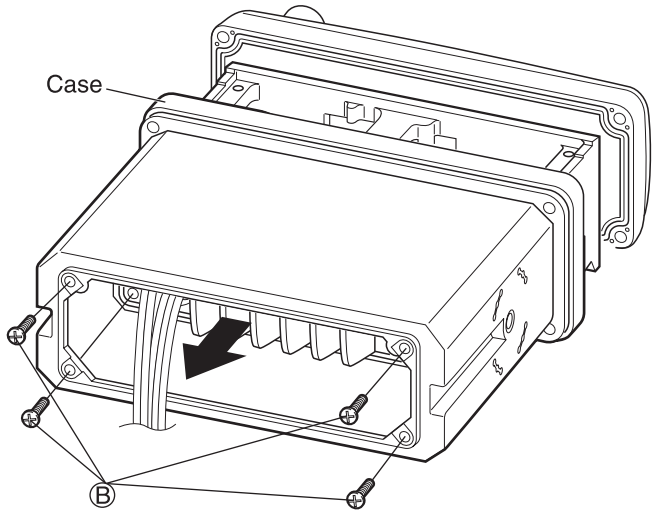

● REMOVING THE MAIN UNIT

① Disconnect W2 from the J2 and J3.
② Disconnect W4 and W5 from the J4 and J5.
③ Unsolder the antenna connector, Ⓒ (2 points).
④ Unsolder bottom side Ⓓ (6 points), as shown below.
⑤ Unscrew 2 screws, Ⓔ, and 6 screws, Ⓕ, and 2 clips Ⓖ to remove the MAIN unit from the chassis.

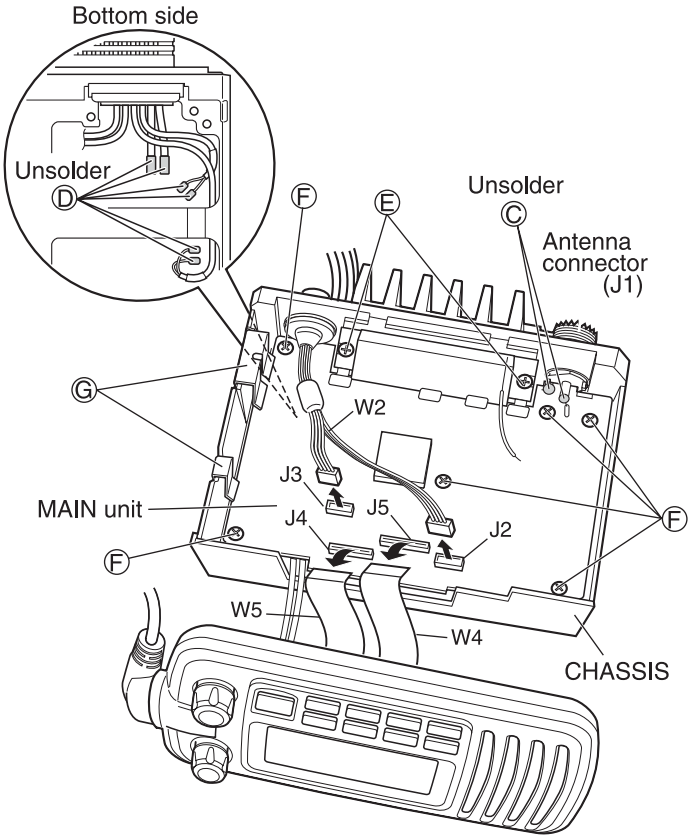

SECTION 4 CIRCUIT DESCRIPTION

4-1 RECEIVER CIRCUITS

4-1-1 ANTENNA SWITCHING CIRCUIT

The antenna switching circuit toggles the receive line and the transmit line. This circuit does not allow transmit signals to enter the receiver circuits.

The received signals from the antenna connector (CHASSIS UNIT; J1) are passed through a two-stage low-pass filter (LPF; L21, L22, C127–C130, C132) and then applied to the $\lambda/4$ type antenna switching circuit (D14, D21).

While receiving, no voltage is applied to D14 and D21. Thus, the receive line and the ground are disconnected and L31 and C142 function as an LPF which leads received signals to the RF circuits. The received signals are applied to the RF circuits via the attenuator (D22).

4-1-2 RF CIRCUITS

The RF circuits amplify received signals within the range of frequency coverage and filters out-of-band signals.

The received signals from the antenna switch are passed through a tunable bandpass filter (BPF; D25, L35, C149, C151, C152, C154) to suppress unwanted signals. The filtered signals are amplified at the RF amplifier (Q21). The amplified signals are passed through another three-stage tunable BPF (D26–D28, L36, L38, L39, C161, C162, C164, C173–C178) to suppress unwanted signals again.

The filtered signals are then applied to the 1st IF circuits.

4-1-3 1st IF CIRCUITS

The 1st IF circuits contain the 1st mixer, IF amplifier and the 1st IF filter circuits, and the 1st IF mixer converts the received signals into a fixed frequency of the 1st intermediate frequency (IF) signal. The converted 1st IF signal is filtered at the 1st IF filters, then amplified at the 1st IF amplifier.

The signals from the three-stage tunable BPF are converted into the 21.7 MHz 1st IF signal at the 1st mixer (Q22) by being mixed with the 1st LO signal generated at the VCO (Q4, Q5, D3, D4).

The converted 1st IF signal from the 1st mixer is passed through the monolithic filters (FI1, FI2) to suppress unwanted signals, and then amplified at the 1st IF amplifier (Q23).

The amplified 1st IF signal is applied to the FM IF IC (IC2, pin 16).

4-1-4 2nd IF AND DEMODULATOR CIRCUITS

The 1st IF signal is converted into the 2nd IF signal and demodulated at the detector section in the FM IF IC. The FM IF IC contains 2nd mixer, limiter amplifier, quadrature detector, etc. in its package.

The 1st IF signal from the 1st IF amplifier (Q23) is applied to the mixer section in the FM IF IC (IC2, pin 16). The applied 1st IF signal is mixed with the 21.25 MHz 2nd LO signal from the PLL IC (IC1, pin 17) to be converted into the 450 kHz 2nd IF signal.

The 2nd IF signal from the mixer section is output from pin 3 and passed through the ceramic filter (FI3) to suppress the heterodyne noise. The filtered signal is applied to the FM IF IC (IC2, pin 5) again, and amplified at the limiter amplifier section and demodulated by the quadrature detector.

The demodulated AF signals are output from pin 9, and applied to the AF cricuits.

4-1-5 AF CIRCUITS

The demodulated AF signals from the FM IF IC are amplified and filtered in AF circuits.

The AF signals from FM IF IC (IC3, pin 9) are passed through the BPF (Q31, Q32) and AF mute switch (IC4, pins 8, 9), and then applied to the volume control pot (VR BOARD; R1) to be adjusted its level. The level adjusted AF signals are applied to the AF power amplifier (IC9, pin1) to obtain 4.5 W (typ.) of AF output power.

The power amplified AF signals are output from pin 4, and applied to the internal speaker (FRONT UNIT; SP1) via J4 or connected external speaker/hailer.

• 2ND IF AND DEMODULATOR CIRCUITS

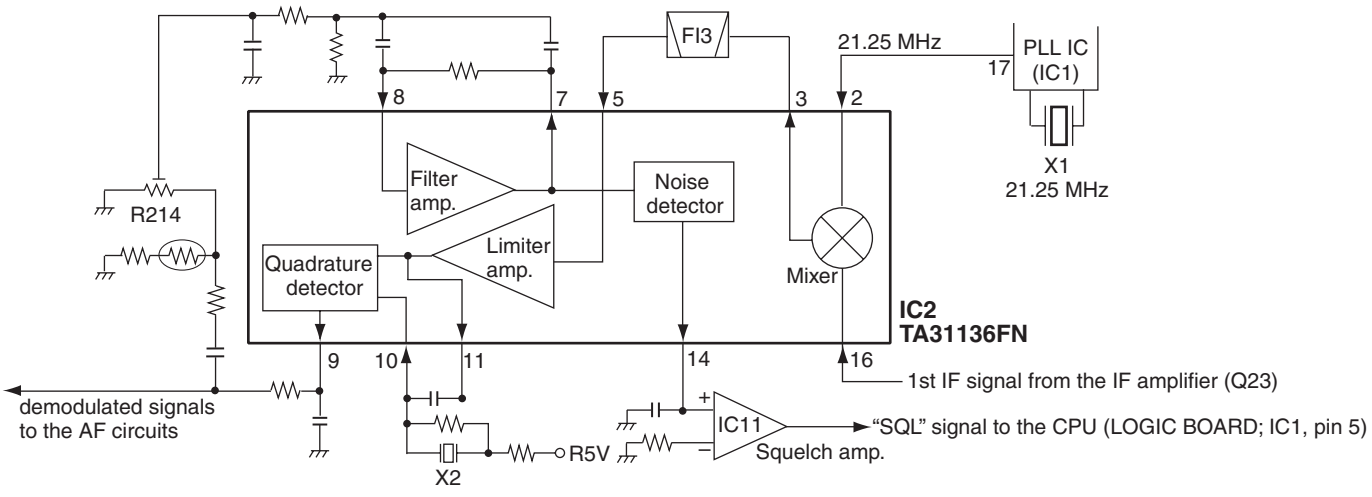

4-1-6 SQUELCH CIRCUITS

Noise squelch circuit mutes AF output signals when no RF signals are received. By detecting noise components in the demodulated AF signals, the squelch circuit switches the AF mute switch ON and OFF.

A portion of the demodulated AF signals from the FM IF IC (IC2, pin 9) are passed through the squelch adjustment pot (R214) to be adjusted its level. The level adjusted AF signals are passed through the active filter (IC2, pins 7, 8; R211–R213, C211, C212, C217). The filtered signals are then applied to the noise amplifier section in the IC2 to amplify the noise components only.

The amplified noise components are converted into the pulse-type signal at the noise detector section, and output from pin 14 as the "SQL" signal. The "SQL" signal is applied to the squelch amplifier (IC11, pin 1) to be amplified its level, then output from pin 4. The amplified "SQL" signal is applied to the CPU (LOGIC BOARD; IC1, pin 5). Then the CPU outputs "RMUTEM" signal from pin 64 according to the "SQL" signal level to toggle the AF mute circuit (IC4) ON/OFF.

4-2 TRANSMITTER CIRCUITS

4-2-1 MICROPHONE AMPLIFIER CIRCUIT

The microphone amplifier circuit amplifies the audio signals from microphone (MIC signals) within +6 dB/oct pre-emphasis characteristic.

The MIC signals from the microphone (HM-150B/SW; MC1) are passed through the microphone mute switch (IC5, pins 10, 11) and amplified at the microphone amplifier (IC7, pin 6) to obtain +6 dB/oct pre-emphasis characteristics. The amplified MIC signals are limited its level at the IDC amplifier (IC7, pin 5), and filtered out 3 kHz and higher audio signals at the LPF (IC8, pins 5, 7).

The filtered MIC signals are passed through the deviation adjustment pot (R327) to be adjusted its level. Then the level adjusted MIC signals are applied to the modulation circuit.

4-2-2 MODULATION CIRCUIT

The modulation circuit modulates the VCO oscillating signal with the audio signals from the microphone.

The level adjusted MIC signals are applied to the modulation circuit (D2) to modulate the VCO oscillating signal by changing the reactance of D2 at the VCO (Q4, Q5, D3, D4).

The modulated VCO output signals are amplified at the buffer amplifiers (Q6, Q7), then applied to the transmit amplifiers via the TX/RX switch (D7).

4-2-3 TRANSMIT AMPLIFIERS

The VCO output signals are amplified to transmit output power level by the transmit amplifiers .

The buffer-amplified VCO output signals from the TX/RX switch (D7) are applied to the pre-drive (Q10), YGR (Q12), and power (IC3) amplifiers to be amplified to the transmit output power level. The power amplified transmit signal is passed through the power detector (D12, D13), antenna switch (D14) and a two-stage LPF (L21, L22, C127–C130, C132), and then applied to the antenna connector (CHASSIS UNIT; J1).

4-2-4 APC CIRCUIT

The APC (Automatic Power Control) circuit stabilizes transmit output power and controls transmit output power High (25 W) or Low (1 W).

The power detector circuits (D12, D13) detect the transmit output signal level and converts it into DC voltage. The detected voltage is applied to the APC amplifier (IC12, pin 3). The voltage of the "T5V" line is applied to another input (pin 1) via the transmit output power adjustment pot (R112) as the reference voltage.

The output voltage from the APC amplifier controls the bias of the power amplifier (IC3) to control the output power by comparing the detected voltage and the reference voltage.

Thus the APC circuit maintains a constant transmit output power.

• APC CIRCUIT

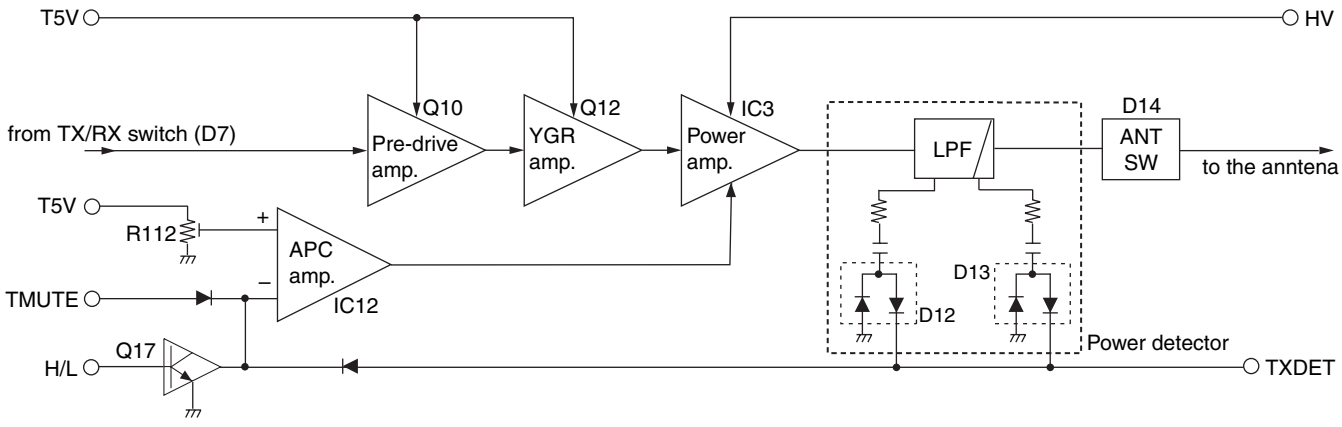

4-3 PLL CIRCUITS

4-3-1 VCO CIRCUIT

The VCO circuit (Q4, Q5, D3, D4) directly generates both of the 1st LO frequency for receiving (134.35–141.575 MHz) and the transmit frequency (156.025–157.425 MHz).

While receiving, the VCO output signal (1st LO signal) is amplified at the buffer amplifiers (Q6, Q7) and passed through the TX/RX switch (D8), then applied to the 1st mixer (Q22).

While transmitting, the VCO output signal (transmit signal) is amplified at the buffer amplifiers (Q6, Q7) and passed through the TX/RX switch (D7), then applied to the pre-driver (Q10).

A portion of the VCO output signal from the buffer amplifier (Q6) is fed back to the PLL IC (IC1, pin 2) as the comparison signal via the buffer amplifier (Q3) and the LPF (L2, C34, C35).

4-3-2 PLL CIRCUIT

The PLL circuit provides stable oscillation of the transmit frequency and receive 1st LO frequency. The PLL circuit compares the phase of the divided VCO frequency with the reference frequency. The PLL output frequency is controlled by the divided ratio of the programmable divider.

The buffer amplified signals are applied to the PLL IC (IC1, pin 2) via the LPF (L2, C34, C35). The applied signals are divided at the prescaler and programmable counter section according to the “PDATA” from the CPU (LOGIC BOARD; IC1 pin 8). The divided signal is phase-compared with the reference frequency at the phase detector.

The phase difference is output from pin 8 as a pulse type signal after being passed through the charge pump section. The output signal is passed through the loop filter (R7–R9, R41, C4, C5, C43, C44) to be converted into the DC voltage, and is then applied to the VCO circuits as the lock voltage.

If the oscillated signal drifts, its phase changes from that of the reference frequency, causing a lock voltage change to compensate for the drift in the oscillated frequency.

4-4 DSC CIRCUITS

• DECODING

A portion of the demodulated AF signals from the FM IF IC (IC2, pin 9) are passed through the LPF (Q38) to filter DSC signal. The filtered DSC signal is applied to the DSC decoder (IC15, pin 2). The decoded DSC signal is output from pin7, and then applied to the CPU (LOGIC BOARD; IC1, pin 14). Then the CPU controls the transceiver according to the DSC content.

• ENCODING

The DSC signals (FSK) are generated by the CPU (LOGIC BOARD; IC1) and output from pins 141. The DSC signals are applied to the buffer amplifier (LOGIC BOARD; IC5, pin 3). The buffer amplified DSC signals are output from pin 1, and passed through the LPF (IC8, pins 5, 7), and applied to the modulation circuit (D2) via the deviation adjustment pot (R327) to modulate the VCO oscillating signal.

4-5 PUBLIC ADDRESS (PA) CIRCUIT

The Public Address (PA) circuit power amplifies the audio signals from the microphone. The power amplified MIC signals are output to the connected external speaker or hailer.

The MIC signals from the microphone (HM-150B/SW or optional HM-157) are passed through the AF mute circuit (IC5, pins 10, 11), and applied to the microphone amplifier (IC8, pin 2). The amplified MIC signals are output from pin 1, and applied to the electric volume controller (IC13, pin 1) via the AF mute circuit (IC5, pins 8, 9). The volume controlled MIC signals are then passed through the AF mute circuit (Q65), and applied to the AF power amplifier (IC14, pin 1) to be amplified to obtain 5 W (min.) of AF output power.

The power amplified AF signals are output from pin 4, and applied to the connected external speaker or hailer.

• PLL CIRCUITS

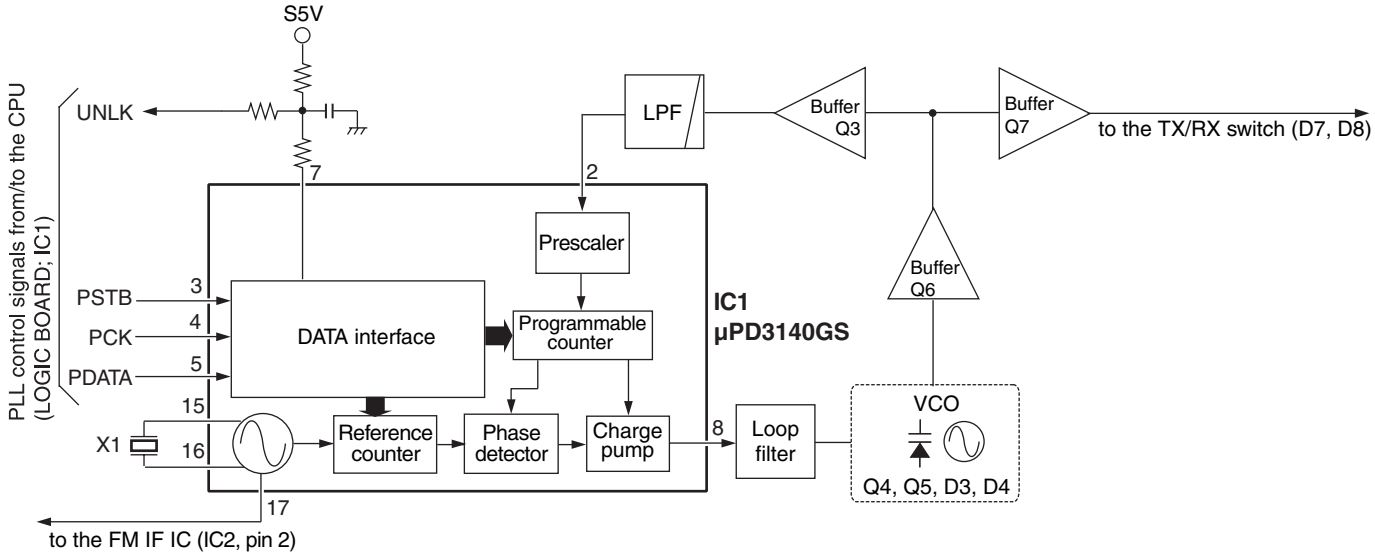

4-6 POWER SUPPLY CIRCUITS

Line	Description
HV	The voltage from the connected DC power supply.
L5V	Common 5V converted from the HV line at the L5V regulator (LOGIC BOARD; IC3). The converted voltage is applied to the CPU (LOGIC BOARD; IC1)
VCC	Same voltage as the HV line whitch is passed through the power control circuit (Q61, Q62).
S5V	Common 5V converted from the VCC line at the +5 regulator circuit (IC10).
T5	Transmit 5V controlled by the T5 control circuit (Q52, Q57) using the "SEND" signal from CPU (LOGIC BOARD; IC1, pin 52).
R8	Receive 8 V converted from the VCC line at the R8 regulator (Q55, Q56). The converted voltage is applied to the receiver circuits.
R5	Receive 5V controlled by the R5 control circuit (Q53, Q54) using the "RCV" signal from CPU (LOGIC BOARD; IC1, pin 53). The controlled voltage is applied to the receiver circuits.

4-7 CPU PORT ALLOCATIONS

Pin NO.	Port name	Description
2	KEYM	Input port for keys on HM-150B/SW. Approx. 2.02 V: [▲] key is pushed. Approx. 3.00 V: [▼] key is pushed. Approx. 3.84 V: [H/L] key is pushed.
3	TXDET	Input port for transmit detected voltage.
4	LBAT	Input port for low battery detecting.
5	SQL	Input port for "NOISE" signal from the squelch amplifier (IC11, pin 4).
6	SQLV	Input port for squelch adjustment pot (SQL BOARD; R1).
7	WXDEC	Input port for weather alert signal from the LPF (Q38).
8	PDATA	Outputs data signal to the PLL IC (IC1, pin 5).
9	PCK	Outputs clock signal to the PLL IC (IC1, pin 4).
10	PSTB	Outputs strobe signal to the PLL IC (IC1, pin3).
12	EVDATA	Outputs volume control signal to the volume ccontroller (IC13, pin 5) for PA circuit.
13	EVCK	Outputs clock signal to the volume ccontroller (IC13, pin 4) for PA circuit.
14	DSDEC	Input port for the DSC decode signal from the DSC decoder (IC15, pin 7).
28, 29	CONT1, CONT0	Output LCD contrast adjust signal to the CPU (IC1, pin 134).
32	COMTXD	Outputs serial data signal to the connected HM-157 (Optional product).
33	COMRXD	Input port for the serial data signal from the connected HM-157 (Optional product).
34	ECK	Outputs clock signal to the EEPROM (LOGIC BOARD; IC4, pin 6).
35	EDATA	I/O port for the EEPROM (LOGIC BOARD; IC4, pin 5) control data.
37	NMTXD	Outputs NMEA command signal.
38	NMRXD	Input port for the NMEA signal.
48	PWR	Input port for power switch (VR BOARD; R1). Low: When [VOL] is pushed.
49	PAMUTE	Outputs control signal to the AF (Public Address) mute circuit (Q65). High: During mute.
50	PWRON	Outputs power control signal to the power control circuit (Q61, Q62). High: While the transceiver is switched ON.
51	TMUTE	Outputs transmit mute signal to the APC circuit (IC12, pin 3). High: During mute.
53	RCV	Outputs control signal to the R5 control circuit (Q53, Q54). High: While receiving.
54	H/L	Outputs TX power control signal to the TX power control circuit (Q17, D11). High: 25 W Low: 1 W
55	ATT	Outputs attenuator control signal to the attenuator (D22). High: Attenuator ON.
57	PTT	Input port for the [PTT] switch (HM-150B/SW; S1). Low: [PTT] key is pushed.
60	UNLK	Input port for the "UNLK" signal from the PLL IC (IC1, pin7). High: PLL circuit is unlocked.
61	DTRS	Input port for the [DISTRESS] key (LOGIC BOARD; S9). Low: [DISTRESS] key is pushed.
62	RMUTEP	Outputs AF (Public Address) mute signal to the AF mute circuit (IC4, pin12). Low: During mute.
63	RMUTES	Outputs AF mute signal to the AF mute circuit (IC4, pin 5) for the connected HM-157 (Optional product). Low: During mute.
64	RMUTEM	Outputs AF (internal speaker) mute signal to the AF mute circuit (IC4, pin 6). Low: During mute.
65	MMUTEP	Outputs microphone (Public Address) mute signal to the AF mute circuit (IC5, pin 6). Low: During mute.
66	MMUTES	Outputs microphone mute signal to the AF mute circuit (IC5, pin 5) for the connected HM-157 (Optional product). Low: During mute.
67	MMUTEM	Outputs microphone (HM-150B/SW) mute signal to the AF mute circuit (IC5, pin 13). Low: During mute.
68	PTTS	Outputs AF/MIC control signal to the AF mute circuit (IC6, pin 5). High: PTT switch (HM-157) is pushed
69	PTTM	Outputs AF/MIC control signal to the AF mute circuit (IC5, pin 12).
70	LO/DX	Input port for the [LO/DX] key (LOGIC BOARD; S8). Low: [LO/DX] key is pushed.

4-7 PORT ALLOCATIONS (continued)

Pin NO.	Port name	Description
71	DSC	Input port for the [DSC] key (LOGIC BOARD; S7). Low: [DSC] key is pushed.
72	PA	Input port for the [PA] key (LOGIC BOARD; S6). Low: [PA] key is pushed.
73	CH/WX	Input port for the [CH/WX] key (LOGIC BOARD; S5). Low: [CH/WX] key is pushed.
74	SCAN	Input port for the [SCAN] key (LOGIC BOARD; S4). Low: [SCAN] key is pushed.
75	CH16	Input port for the [16] key (LOGIC BOARD; S3). Low: [16] key is pushed.
76	DOWN	Input port for the [▼] key (LOGIC BOARD; S2). Low: [▼] key is pushed.
77	UP	Input port for the [▲] key (LOGIC BOARD; S1). Low: [▲] key is pushed.
138	DIM	Outputs dimmer control signal to the LCD control circuit (LOGIC BOARD; Q2, Q3).
139	BEEP	Outputs beep signal to the AF amplifier (IC9, pin 1).
141	DS/BPF	• While transmitting: Outputs DSC encode signal as "DSENC" to the LPF (IC8, pin 5) via the buffer amplifier (LOGIC BOARD; IC5, pins 1, 3). • While receiving: Outputs tuning signal as "BPFV" to the tunable BPFs (D25–D28) via buffer amplifier (LOGIC BOARD; IC5, pins 5, 7).

SECTION 5 ADJUSTMENT PROCEDURES

5-1 PREPARATION

■ REQUIRED TEST EQUIPMENTS

EQUIPMENT	GRADE AND RANGE	EQUIPMENT	GRADE AND RANGE
DC power supply	Output voltage : 13.8 V DC Current capacity : More than 10 A	Audio generator	Frequency range : 300–3000 Hz Measuring range : 1–500 mV
RF power meter (terminated type)	Measuring range : 1–30 W Frequency range : 100–300 MHz Impedance : 50 Ω SWR : Less than 1.2 : 1	Standard signal generator (SSG)	Frequency range : 0.1–300 MHz Output level : 0.1 μV to 32 mV (–127 to –17 dBm)
Frequency counter	Frequency range : 0.1–300 MHz Frequency accuracy: ±1 ppm or better Sensitivity : 100 mV or better	Oscilloscope	Frequency range : DC to 20 MHz Measuring range : 0.01–20 V
FM deviation meter	Frequency range : 30–300 MHz Measuring range : 0 to ±10 kHz	AC millivoltmeter	Measuring range : 10 mV to 10 V
DC volt meter	Input impedance : 50 kΩ /V DC or more	External speaker	Input impedance : 4 Ω Capacity : More than 5 W
		Attenuator	Power attenuation : 40 or 50 dB Capacity : More than 30 W

■ CONNECTION

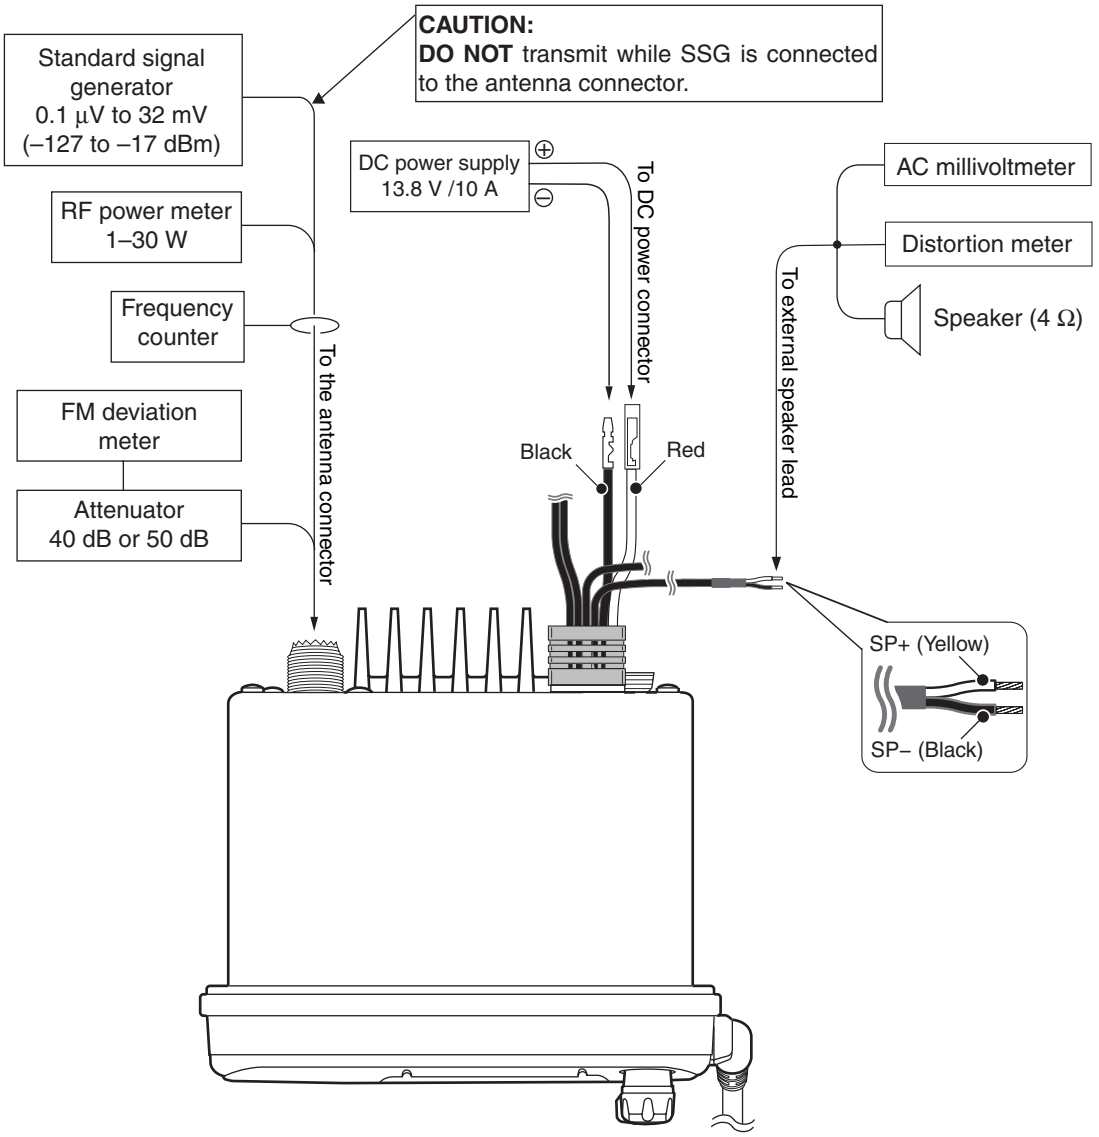
CAUTION:
DO NOT transmit while SSG is connected to the antenna connector.
Standard signal generator 0.1 μV to 32 mV (–127 to –17 dBm)
RF power meter 1–30 W
Frequency counter
FM deviation meter
Attenuator 40 dB or 50 dB
DC power supply 13.8 V /10 A
To DC power connector
To the antenna connector
To external speaker lead
AC millivoltmeter
Distortion meter
Speaker (4 Ω)
Black
Red
SP+ (Yellow)
SP– (Black)

5-2 FREQUENCY ADJUSTMENT

ADJUSTMENT		ADJUSTMENT CONDITION	MEASUREMENT		VALUE	ADJUSTMENT POINT	
			UNIT	OPERATION		UNIT	ADJUST
LOCK VOLTAGE	1	• Channel : CH16 (156.800 MHz) • Receiving	MAIN	Connect a digital multimeter or oscilloscope to the check point "CP1".	1.1–2.1 V	MAIN	Verify
	2	• Channel : CH16 (156.800 MHz) • Output power : Low • Transmitting			0.9–1.9 V		Verify
REFERENCE FREQUENCY	1	• Channel : CH16 (156.800 MHz) • Output power : Low • Connect a power meter to the antenna connector. • Transmitting	Rear Panel	Loosely couple a frequency counter to the antenna connector.	156.800 MHz ±500 Hz	MAIN	C12

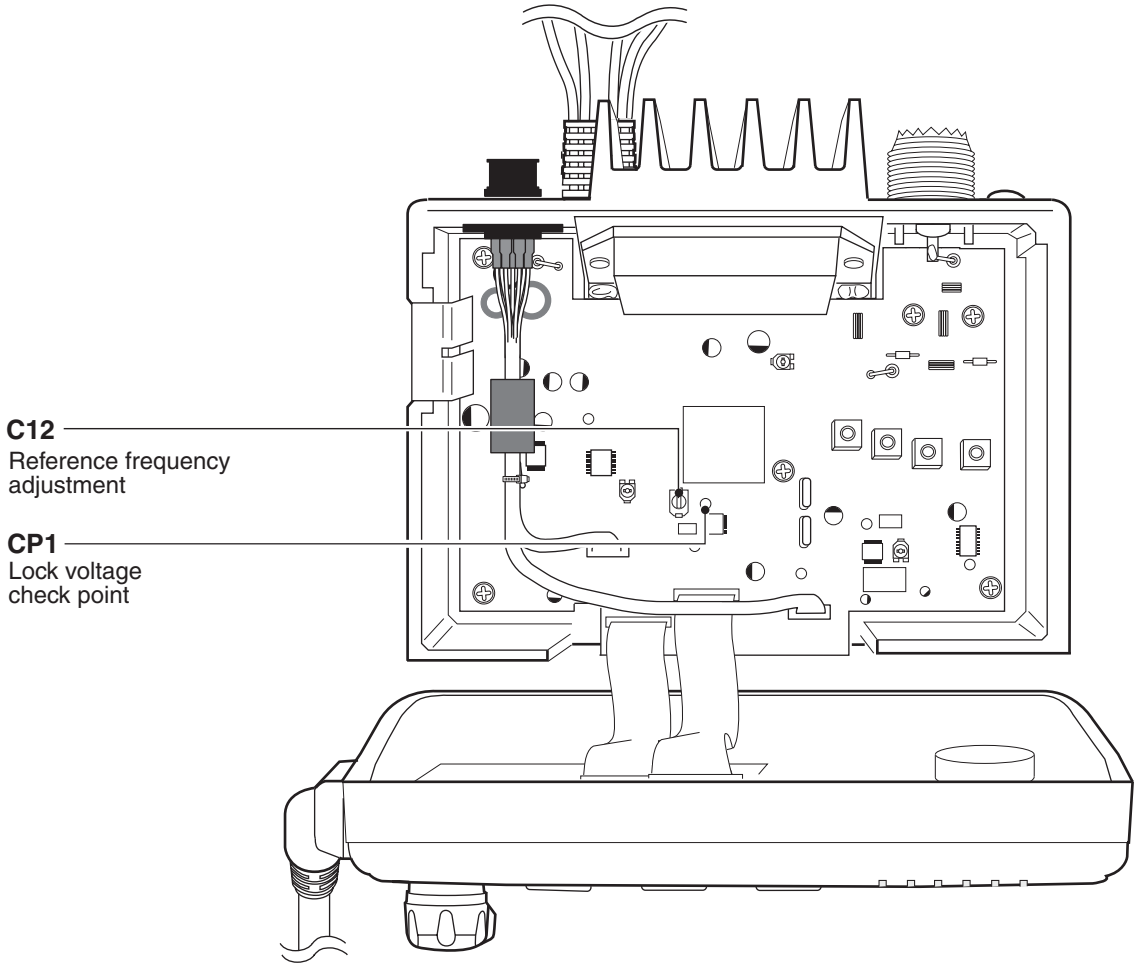

5-3 TRANSMIT ADJUSTMENT

ADJUSTMENT		ADJUSTMENT CONDITION	MEASUREMENT		VALUE	ADJUSTMENT POINT	
			UNIT	OPERATION		UNIT	ADJUST
OUTPUT POWER	1	• Channel : CH16 (156.800 MHz) • Output power : High • Transmitting	Rear Panel	Connect an RF power meter to the antenna connector.	23–23.5 W	MAIN	R112
FREQUENCY DEVIATION	1	• Channel : CH16 (156.800 MHz) • Output power : Low • Connect an audio generator to the pin 28 of J4 (MAIN UNIT) and set as; Frequency : 1 kHz Level : 30 mV • Set the FM deviation meter as; HPF : OFF LPF : 20 kHz De-emphasis: OFF Detector : (P–P)/2 • Transmitting	Rear Panel	Connect an FM deviation meter to the antenna con-nector through an attenuator.	±4.25–4.35 kHz	MAIN	R327

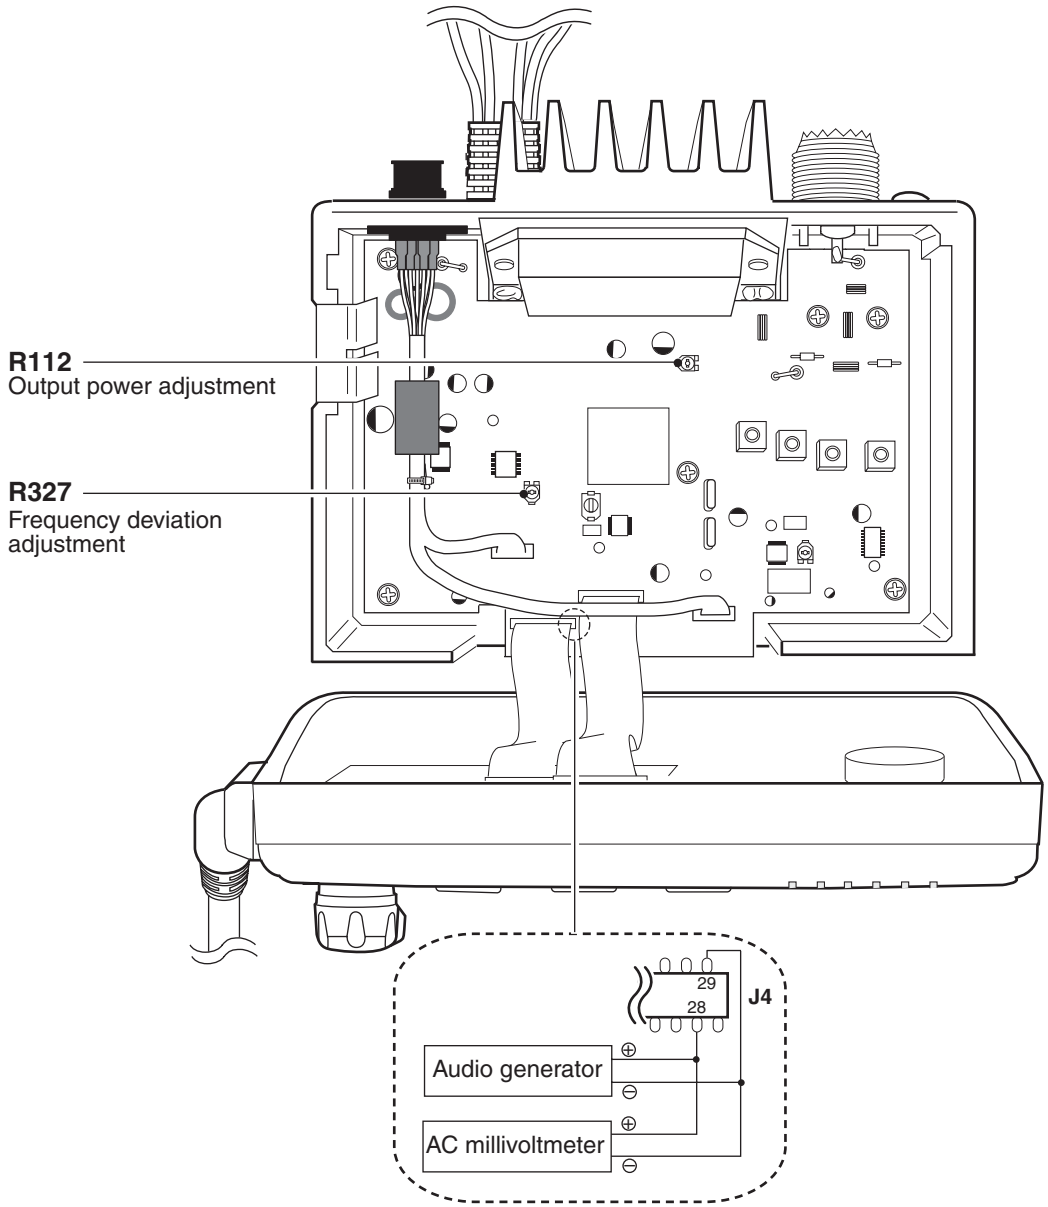

5-4 RECEIVE ADJUSTMENT

ADJUSTMENT		ADJUSTMENT CONDITION	MEASUREMENT		VALUE	ADJUSTMENT POINT	
			UNIT	OPERATION		UNIT	ADJUST
SENSITIVITY	1	• Channel : CH16 (156.800 MHz) • **[SQL]** : Max. counterclockwise • Connect a distortion meter with a 4 Ω load to the external speaker lead. • Push **[PA•RX]** for 1 sec. to turn the RX speaker mode ON. • Connect an SSG to the antenna connector and set as ; Frequency : 156.800 MHz Level : +10 dBμ Modulation :1 kHz Deviation : ±3 kHz • Receiving	MAIN	Connect a DC volt meter or oscilloscope to the check point "CP3".	Maximum voltage	MAIN	L35, L36, L38, L39 (Repeate two times or more.)
SQUELCH	1	• Channel : CH16 (156.800 MHz) • **[SQL]** : Max. counterclockwise • Set the SSG as; Level : –12 dBμ • Receiving	MAIN	Connect a volt meter or oscilloscopeto the check point "CP5".	1.0 V	MAIN	R214

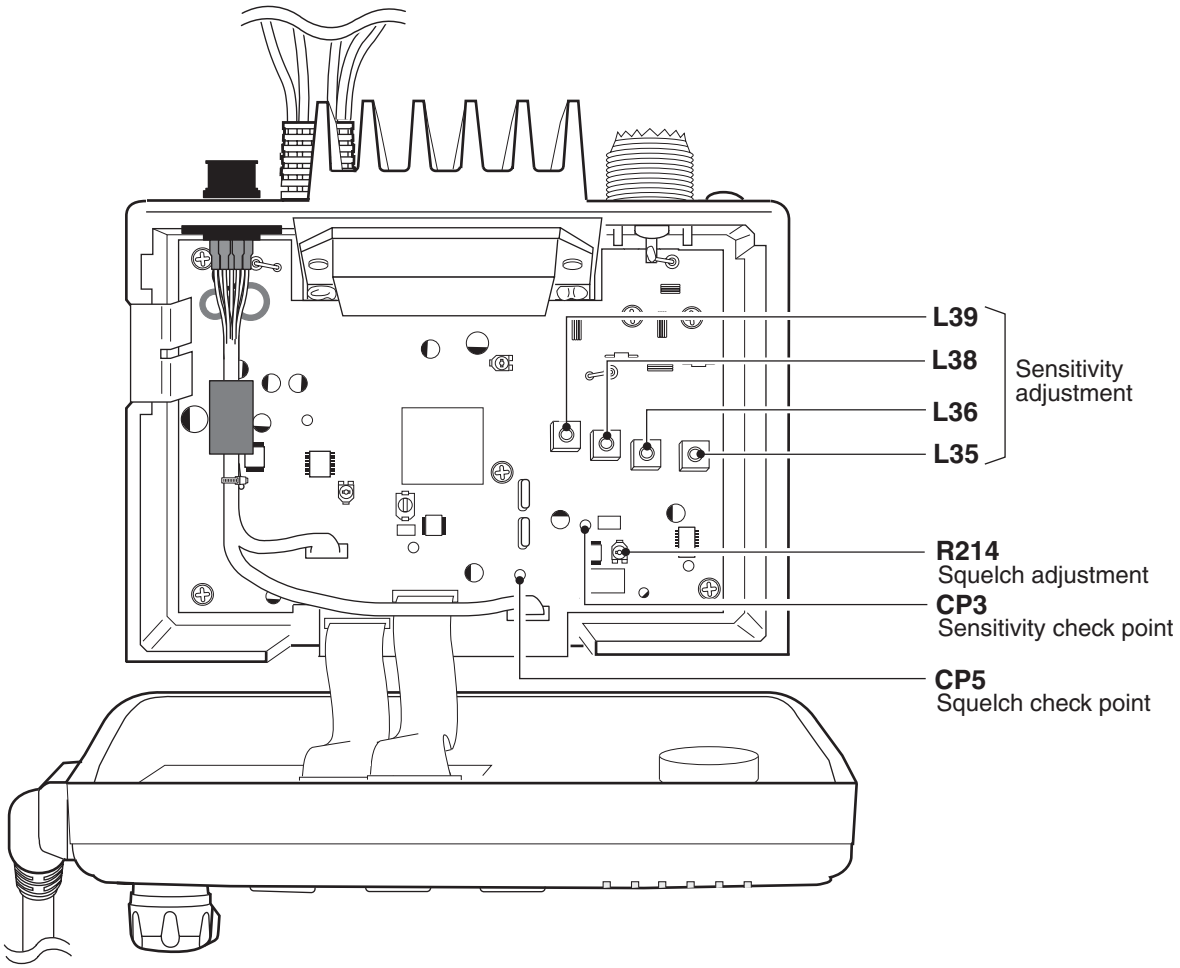

SECTION 6 PARTS LIST

6-1 IC-M422

[REPLACEMENT UNITS]

ORDER NO.	UNIT NAME
0328520101	U M422 #01 FRONT (FRONT+LOGIC+VR+SQL) [BLK]
0328520201	U M422 #02 FRONT (FRONT+LOGIC+VR+SQL) [SW]
0328520102	U M422 #01 MAIN (MAIN+CHASSIS)

[FRONT UNIT]

REF NO.	ORDER NO.	DESCRIPTION	M.	H/V LOCATION
MC1	0800007890	MIC HM-150B ACC <FG> [BLK]		
	0800007900	MIC HM-150SW ACC <FG> [SW]		
SP1	2510001240	SP 045P0803 <FG>		
W1	7120000470	JMP ERDS2T0		
W2	7120000470	JMP ERDS2T0		

[LOGIC BOARD]

REF NO.	ORDER NO.	DESCRIPTION	M.	H/V LOCATION
IC1	1140012751	S.IC M30220MA-137RP	B	48.1/48.5
IC2	1110005770	S.IC S-80942CNMC-G9C-T2	B	79.7/48.8
IC3	1180000970	S.IC AN78L05M-(E1)	B	55.3/20.8
IC4	1140008650	S.IC HN58X2464TI	B	51.9/27.7
IC5	1110002700	S.IC NJM2904M-TE1	B	39.3/7.7
IC6	1170000350	S.IC PC357N6T	B	77.2/11.6
IC7	1130007420	S.IC TC7W14FU (TE12L)	B	22/44.5
Q1	1520000840	S.TR KTA1664Y-RTF/P	B	74/18.8
Q2	1530003900	S.TR KTC4075 BL-RTK/P	B	69.7/17.5
Q3	1530003900	S.TR KTC4075 BL-RTK/P	B	69.7/21.3
Q4	1590003590	S.TR KRC414 RTK/P	B	46.3/28.6
Q5	1530002280	S.TR 2SC4081 T106 S	B	11.8/34.8
Q6	1590003580	S.TR KRC404 RTK/P	B	15.6/34.6
Q7	1530002280	S.TR 2SC4081 T106 S	B	22.7/49.7
Q8	1510000510	S.TR 2SA1576A T106R	B	19.6/51
Q9	1560000810	S.FET 2SK1069-4-TL	B	26.7/39.6
D1	1750001180	S.DIO KDS122 RTK/P	B	47.5/25.8
D2	1750000550	S.DIO 1SS355 TE-17	B	83.7/11.4
D3	1750001180	S.DIO KDS122 RTK/P	B	13.4/31.7
D4	1730002360	S.ZEN MA8062-M (TX)	B	12.7/29.2
X1	6050011500	S.XTL CR-739 (9.8304 MHz)	B	60.8/34
R1	7030003640	S.RES ERJ3GEYJ 473 V (47 kΩ)	B	54.2/37.2
R2	7030003640	S.RES ERJ3GEYJ 473 V (47 kΩ)	B	54.9/35.9
R3	7030003800	S.RES ERJ3GEYJ 105 V (1 MΩ)	B	56.2/38.3
R4	7030003320	S.RES ERJ3GEYJ 101 V (100 Ω)	B	57.3/40.3
R5	7030003640	S.RES ERJ3GEYJ 473 V (47 kΩ)	B	63.2/40.4
R6	7030003560	S.RES ERJ3GEYJ 103 V (10 kΩ)	B	63.2/41.7
R11	7030005631	S.RES ERA3YKD 154V (150 kΩ)	B	67.4/47.6
R12	7030005681	S.RES ERA3YKD 473V (47 kΩ)	B	67.4/48.9
R13	7030003560	S.RES ERJ3GEYJ 103 V (10 kΩ)	B	64.2/33.4
R14	7030003460	S.RES ERJ3GEYJ 152 V (1.5 kΩ)	B	74/48.1
R15	7030003570	S.RES ERJ3GEYJ 123 V (12 kΩ)	B	71.4/48.1
R16	7030003530	S.RES ERJ3GEYJ 562 V (5.6 kΩ)	B	72.7/48.1
R17	7030003560	S.RES ERJ3GEYJ 103 V (10 kΩ)	B	59.4/54.7
R18	7030003560	S.RES ERJ3GEYJ 103 V (10 kΩ)	B	62/53.9
R19	7030003560	S.RES ERJ3GEYJ 103 V (10 kΩ)	B	60.7/53.3
R21	7030003560	S.RES ERJ3GEYJ 103 V (10 kΩ)	B	80.9/51.9
R22	7030003640	S.RES ERJ3GEYJ 473 V (47 kΩ)	B	76.7/48.1
R23	7030003640	S.RES ERJ3GEYJ 473 V (47 kΩ)	B	77/50.9
R25	7030010610	S.RES ERJ1TYJ 470U (47 Ω)	B	61.9/19.3
R31	7030003640	S.RES ERJ3GEYJ 473 V (47 kΩ)	B	51.9/33.6
R32	7030003560	S.RES ERJ3GEYJ 103 V (10 kΩ)	B	51.9/34.9
R35	7030003580	S.RES ERJ3GEYJ 153 V (15 kΩ)	B	45.3/25.9
R36	7030003440	S.RES ERJ3GEYJ 102 V (1 kΩ)	B	44/25.3
R37	7030003440	S.RES ERJ3GEYJ 102 V (1 kΩ)	B	44.5/31.3
R41	7030003500	S.RES ERJ3GEYJ 332 V (3.3 kΩ)	B	44.9/11.2
R42	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	B	44.2/6.4
R43	7030003800	S.RES ERJ3GEYJ 105 V (1 MΩ)	B	45.8/6.4
R45	7030005321	S.RES ERA3YED 103V	B	33.2/7.7

[LOGIC BOARD]

REF NO.	ORDER NO.	DESCRIPTION	M.	H/V LOCATION
R46	7030008121	S.RES ERA3YED 682V	B	34.5/7.7
R48	7030003860	S.RES ERJ3GE JPW V	B	33.2/10.5
R51	7030003250	S.RES ERJ3GEYJ 270 V (27 Ω)	B	71.9/22.7
R52	7030003250	S.RES ERJ3GEYJ 270 V (27 Ω)	B	73.2/22.7
R53	7030003250	S.RES ERJ3GEYJ 270 V (27 Ω)	B	74.5/22.7
R60	7030003630	S.RES ERJ3GEYJ 393 V (39 kΩ)	B	66.8/19.5
R61	7030003640	S.RES ERJ3GEYJ 473 V (47 kΩ)	B	66.8/16.9
R62	7030003440	S.RES ERJ3GEYJ 102 V (1 kΩ)	B	68.8/24
R63	7030003560	S.RES ERJ3GEYJ 103 V (10 kΩ)	B	69.7/19.4
R64	7030003460	S.RES ERJ3GEYJ 152 V (1.5 kΩ)	B	67.5/21.6
R71	7030003430	S.RES ERJ3GEYJ 821 V (820 Ω)	B	84.9/6
R72	7030003430	S.RES ERJ3GEYJ 821 V (820 Ω)	B	12.1/12.2
R73	7030003430	S.RES ERJ3GEYJ 821 V (820 Ω)	B	11.4/8.7
R74	7030003380	S.RES ERJ3GEYJ 331 V (330 Ω)	B	12.4/50.4
R75	7030003380	S.RES ERJ3GEYJ 331 V (330 Ω)	B	12.4/39
R76	7030003380	S.RES ERJ3GEYJ 331 V (330 Ω)	B	12.4/43.9
R81	7030003430	S.RES ERJ3GEYJ 821 V (820 Ω)	B	87.3/10
R82	7030003520	S.RES ERJ3GEYJ 472 V (4.7 kΩ)	B	21.4/39.5
R83	7030003440	S.RES ERJ3GEYJ 102 V (1 kΩ)	B	70.9/12
R85	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	B	12.7/27.5
R86	7030003210	S.RES ERJ3GEYJ 120 V (12 Ω)	B	11.2/31.7
R87	7030003520	S.RES ERJ3GEYJ 472 V (4.7 kΩ)	B	13.7/34.8
R88	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	B	14.4/36.8
R91	7030003520	S.RES ERJ3GEYJ 472 V (4.7 kΩ)	B	19.6/49.1
R92	7030003280	S.RES ERJ3GEYJ 470 V (47 Ω)	B	24.8/48.8
R95	7030003440	S.RES ERJ3GEYJ 102 V (1 kΩ)	B	26.1/36.8
R96	7030003640	S.RES ERJ3GEYJ 473 V (47 kΩ)	B	24.8/36.8
R97	7030003440	S.RES ERJ3GEYJ 102 V (1 kΩ)	B	23.1/39.9
R101	7030003320	S.RES ERJ3GEYJ 101 V (100 Ω)	B	19.1/14.6
R103	7030003860	S.RES ERJ3GE JPW V	B	20.5/14.6
R104	7030003860	S.RES ERJ3GE JPW V	B	22.6/16.6
R106	7030003640	S.RES ERJ3GEYJ 473 V (47 kΩ)	B	17/16.9
C1	4550006210	S.TAN ECST1CX106R	B	56.3/30
C2	4030006900	S.CER C1608 JB 1H 103K-T	B	55.6/33.7
C3	4030009650	S.CER C1608 CH 1H 240J-T	B	57.5/35.5
C4	4030009650	S.CER C1608 CH 1H 240J-T	B	57.5/38.3
C5	4030006860	S.CER C1608 JB 1H 102K-T	B	88.9/39.3
C6	4030006850	S.CER C1608 JB 1H 471K-T	B	88.9/42.2
C7	4030011600	S.CER C1608 JB 1E 104K-T	B	37.3/55.1
C8	4030006860	S.CER C1608 JB 1H 102K-T	B	36.6/34.4
C11	4030008920	S.CER C1608 JB 1H 473K-T	B	68.7/43.1
C12	4030008920	S.CER C1608 JB 1H 473K-T	B	68.4/44.4
C13	4030008920	S.CER C1608 JB 1H 473K-T	B	67.7/46.1
C14	4030008920	S.CER C1608 JB 1H 473K-T	B	67.4/50.2
C15	4030008920	S.CER C1608 JB 1H 473K-T	B	64.1/50.8
C16	4030008920	S.CER C1608 JB 1H 473K-T	B	65.4/50.8
C17	4030011600	S.CER C1608 JB 1E 104K-T	B	62.8/51.2
C18	4030006900	S.CER C1608 JB 1H 103K-T	B	70.6/50.2
C21	4030017480	S.CER C1608 JB 1A 474K-T	B	78.3/51.9
C22	4030008890	S.CER C1608 JB 1H 273K-T	B	79.6/51.9
C25	4510004630	S.ELE ECEV1CA100SR	B	49.6/19.7
C26	4030006900	S.CER C1608 JB 1H 103K-T	B	59.4/20.7
C27	4550006210	S.TAN ECST1CX106R	B	58/25
C28	4030006900	S.CER C1608 JB 1H 103K-T	B	54.4/25
C31	4030011600	S.CER C1608 JB 1E 104K-T	B	52.8/32.3
C41	4030011600	S.CER C1608 JB 1E 104K-T	B	36.5/11.2
C42	4030007170	S.CER C1608 CH 1H 221J-T	B	42.1/11.2
C43	4030007010	S.CER C1608 CH 1H 100D-T	B	39.3/11.2
C51	4510004630	S.ELE ECEV1CA100SR	B	77.6/23.5
C52	4030006860	S.CER C1608 JB 1H 102K-T	B	70.1/24
C54	4030011600	S.CER C1608 JB 1E 104K-T	B	66.8/18.2
C81	4030012660	S.CER C1608 JB 1E 683K-T	B	85.3/11.1
C82	4030006900	S.CER C1608 JB 1H 103K-T	B	72.3/12
C83	4030011600	S.CER C1608 JB 1E 104K-T	B	23/36.5
C86	4030011600	S.CER C1608 JB 1E 104K-T	B	17.8/33.8
C87	4030006860	S.CER C1608 JB 1H 102K-T	B	11.6/37
C88	4030006860	S.CER C1608 JB 1H 102K-T	B	83.3/7.8
C89	4030006860	S.CER C1608 JB 1H 102K-T	B	82.1/11.2
C90	4030006860	S.CER C1608 JB 1H 102K-T	B	71.5/9.9
C91	4030011600	S.CER C1608 JB 1E 104K-T	B	22.7/51.6
C95	4030011600	S.CER C1608 JB 1E 104K-T	B	19.5/43.5
C101	4030006860	S.CER C1608 JB 1H 102K-T	B	17/15.6
C102	4030006860	S.CER C1608 JB 1H 102K-T	B	17/13.9
C103	4030006850	S.CER C1608 JB 1H 471K-T	B	23.3/14.6
C104	4030006860	S.CER C1608 JB 1H 102K-T	B	25.4/13.9
C111	4030006860	S.CER C1608 JB 1H 102K-T	B	7.4/15.7
C112	4030006860	S.CER C1608 JB 1H 102K-T	B	9/53
C113	4030006860	S.CER C1608 JB 1H 102K-T	B	48.6/7.2
C114	4030006850	S.CER C1608 JB 1H 471K-T	B	47.2/7.2
C121	4030006900	S.CER C1608 JB 1H 103K-T	B	81.5/17.2
C122	4030007090	S.CER C1608 CH 1H 470J-T	B	88.2/20.2
C123	4030006860	S.CER C1608 JB 1H 102K-T	B	87.5/22.2
C124	4030007090	S.CER C1608 CH 1H 470J-T	B	88.8/22.2
C125	4030006860	S.CER C1608 JB 1H 102K-T	B	87.5/25
C126	4030007090	S.CER C1608 CH 1H 470J-T	B	78.9/30.1

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)
S.=Surface mount

[LOGIC BOARD]

REF NO.	ORDER NO.	DESCRIPTION		M.	H/V LOCATION
J2	6510018970	S.CNR	B4B-PH-SM3-TB	B	76.2/6.5
J3	6510022310	S.CNR	B5B-PH-SM3-TB	B	22.3/8
J4	6510021720	S.CNR	30FLT-SM1-TB	B	55.4/11.8
J5	6510021720	S.CNR	30FLT-SM1-TB	B	38.5/17.8
J6	6510019420	S.CNR	B8B-ZR-SM3-TF	B	84.5/24.6
DS1	5030002850	LCD	IS08328E00V1		
DS2	5040002310	S.LED	SML-311YTT86	T	69.9/11.8
DS3	5040002310	S.LED	SML-311YTT86	T	82.7/4.2
DS4	5040002310	S.LED	SML-311YTT86	T	54.6/11.8
DS5	5040002310	S.LED	SML-311YTT86	T	24/11.8
DS6	5040002310	S.LED	SML-311YTT86	T	39.3/11.8
DS7	5040002310	S.LED	SML-311YTT86	T	10.2/11.8
DS8	5040002660	S.LED	FY1101F-TR (LED)	T	85.9/50.9
DS9	5040002660	S.LED	FY1101F-TR (LED)	T	10.3/50.9
DS10	5040002660	S.LED	FY1101F-TR (LED)	T	85.9/33.5
DS11	5040002660	S.LED	FY1101F-TR (LED)	T	10.3/33.5
DS12	5040002660	S.LED	FY1101F-TR (LED)	T	85.9/42.2
DS13	5040002660	S.LED	FY1101F-TR (LED)	T	10.3/42.2
EP2	8930066470	LCT	SRCN-2852-SP-N-W		
EP81	6910012350	S.BEA	MMZ1608Y 102BT	B	85.3/8.5
EP101	6910012350	S.BEA	MMZ1608Y 102BT	B	21.9/14.6

[MAIN UNIT]

REF NO.	ORDER NO.	DESCRIPTION		M.	H/V LOCATION
IC1	1130007610	S.IC	μPD3140GS-E1 (DS8)	T	58.6/30
IC2	1110003200	S.IC	TA31136FN (EL)	T	92.7/25.9
IC3	1150002081	IC	RA35H1516M-21		
IC4	1130008090	S.IC	BU4066BCFV-E1	T	14.9/28.7
IC5	1130008090	S.IC	BU4066BCFV-E1	T	19.6/15
IC6	1130008090	S.IC	BU4066BCFV-E1	T	26.7/15.2
IC7	1110000960	S.IC	NJM4558M-TE1	T	14/48.5
IC8	1110000960	S.IC	NJM4558M-TE1	T	31.3/45.4
IC9	1110003090	IC	LA4425A		
IC10	1180002780	REG	KIA7805API		
IC11	1120002830	S.IC	NJM2125F-TE1	T	75.9/24.2
IC12	1110002400	S.IC	NJM2107F-TE1	T	62.5/73.6
IC13	1110004490	S.IC	M62429FP 700C	T	5.5/16
IC14	1110003090	IC	LA4425A		
IC15	1110003650	S.IC	NJM2211M-TE1	T	112.9/21.1
Q1	1530003900	S.TR	KTC4075 BL-RTK/P	T	59.3/46.1
Q2	1590003580	S.TR	KRC404 RTK/P	T	44.2/53.8
Q3	1530002600	S.TR	2SC4215-O (TE85R)	T	64.3/45
Q4	1530002920	S.TR	2SC4226-T1 R25	T	54.9/45.4
Q5	1530002920	S.TR	2SC4226-T1 R25	T	50.7/47.1
Q6	1530002600	S.TR	2SC4215-O (TE85R)	T	59.1/49.9
Q7	1530002600	S.TR	2SC4215-O (TE85R)	T	64.9/57
Q10	1530002920	S.TR	2SC4226-T1 R25	T	50.6/74.4
Q12	1530002240	S.TR	2SC3775-3-TB	T	45.5/74.9
Q17	1590003580	S.TR	KRC404 RTK/P	T	69.5/71.8
Q21	1580000540	S.FET	3SK131-T2-LA	T	110.6/51.7
Q22	1580000540	S.FET	3SK131-T2-LA	T	77.4/55.5
Q23	1530003890	S.TR	KTC3880S Y-RTK/P	T	88/24.5
Q31	1530003900	S.TR	KTC4075 BL-RTK/P	T	101.9/8
Q32	1530003900	S.TR	KTC4075 BL-RTK/P	T	97.7/10.9
Q36	1560000810	S.FET	2SK1069-4-TL	T	25.1/27.6
Q37	1590000720	S.TR	DTA144EUA T106	T	27.1/21.6
Q38	1530003900	S.TR	KTC4075 BL-RTK/P	T	116.1/32.8
Q52	1590003580	S.TR	KRC404 RTK/P	T	23.4/56.7
Q53	1510001090	S.TR	KTA2015Y-RTK/P	T	27.2/59.8
Q54	1590003580	S.TR	KRC404 RTK/P	T	27.2/56.7
Q55	1520000840	S.TR	KTA1664Y-RTF/P	T	30.8/69.5
Q56	1530003900	S.TR	KTC4075 BL-RTK/P	T	34.6/68.9
Q57	1510001090	S.TR	KTA2015Y-RTK/P	T	23.4/59.8
Q61	1590003560	S.FET	TPC6104 (TE85LF)	T	23.4/68.8
Q62	1590003580	S.TR	KRC404 RTK/P	T	26.8/70.1
Q65	1530003090	S.TR	2SC4213-B (TE85R)	T	4.3/23.8
D1	1790000620	S.DIO	MA77 (TX)	T	50.1/58.1
D2	1790000620	S.DIO	MA77 (TX)	T	53.4/57.6
D3	1750000710	S.VCP	HVC350BTRF	T	51.9/53
D4	1750000710	S.VCP	HVC350BTRF	T	51.9/51.7
D7	1790000620	S.DIO	MA77 (TX)	T	62.7/66.8
D8	1790000620	S.DIO	MA77 (TX)	T	72.8/60.7
D10	1790001250	S.DIO	MA2S111-(TX)	T	65.4/71.4
D11	1790001250	S.DIO	MA2S111-(TX)	T	75.6/77.1
D12	1790000690	S.DIO	HSM88ASR-TR	T	81.4/79.1
D13	1790000690	S.DIO	HSM88ASR-TR	T	82.9/74.4
D14	1710001080	DIO	XB15A308		
D21	1710001080	DIO	XB15A308		
D22	1750000580	S.DIO	1SV307 (TPH3)	T	116.8/55.1
D25	1750001190	S.VCP	KDV214E RTK/P	T	110.7/58.7
D26	1750001190	S.VCP	KDV214E RTK/P	T	101.8/58.5
D27	1750001190	S.VCP	KDV214E RTK/P	T	96.1/58.5

[MAIN UNIT]

REF NO.	ORDER NO.	DESCRIPTION		M.	H/V LOCATION
D28	1750001190	S.VCP	KDV214E RTK/P	T	86.9/61.2
D42	1790000700	DIO	DSA3A1		
FI1	2030000350	MLH	21R15AB (FL-368)		
FI2	2030000270	MLH	FL-363 (21.7 MHz)		
FI3	2020001680	CER	ALFY450E		
X1	6050012120	S.XTL	CR-804 (21.250 MHz)	T	49/29.6
X2	6070000200	DCR	CDBLA450KCAY24-B0		
L1	6200009560	S.COL	MLG1608B R10J-T	T	66.2/45
L2	6200010840	S.COL	MLG1608B 56NJ-T	T	61.4/42.8
L3	6200003090	S.COL	NL 322522T-2R7J-3	T	57.3/56.2
L4	6200008190	S.COL	0.25-1.9-8TL 80N	T	55.1/52.6
L6	6200009560	S.COL	MLG1608B R10J-T	T	61.4/52.1
L7	6200009560	S.COL	MLG1608B R10J-T	T	63/56.8
L11	6200011600	S.COL	MLG1608B 82NJ-T	T	75.1/62.3
L12	6200009560	S.COL	MLG1608B R10J-T	T	78.5/61.5
L14	6200005740	S.COL	ELJRE 47NG-F	T	53.7/68.9
L15	6200002430	S.COL	NL 252018T-082J	T	50.4/71.6
L16	6200009620	S.COL	MLG1608B 68NJ-T	T	43/75.4
L17	6200002600	S.COL	NL 252018T-047J	T	40.1/75.5
L18	6200002600	S.COL	NL 252018T-047J	T	39.5/81.4
L19	6110001670	COL	LA-253		
L20	6170000230	COL	LW-25		
L21	6110001600	COL	LA-243		
L22	6110001600	COL	LA-243		
L23	6200003550	S.COL	MLF1608A 4R7K-T	T	116.2/57.5
L31	6110001600	COL	LA-243		
L35	6150003820	COL	LS-440		
L36	6150003820	COL	LS-440		
L38	6150003820	COL	LS-440		
L39	6150003820	COL	LS-440		
L42	6200010090	S.COL	ELJND R82JF	T	77.4/52.8
R1	7030003440	S.RES	ERJ3GEYJ 102 V (1 kΩ)	T	65.8/27
R2	7030003440	S.RES	ERJ3GEYJ 102 V (1 kΩ)	T	65.8/28.3
R3	7030003440	S.RES	ERJ3GEYJ 102 V (1 kΩ)	T	65.8/29.6
R4	7030003440	S.RES	ERJ3GEYJ 102 V (1 kΩ)	T	65.8/24.4
R5	7030003680	S.RES	ERJ3GEYJ 104 V (100 kΩ)	T	65.8/25.7
R6	7030003380	S.RES	ERJ3GEYJ 331 V (330 Ω)	T	65.8/32.2
R7	7030003440	S.RES	ERJ3GEYJ 102 V (1 kΩ)	T	61.9/35.2
R8	7030003200	S.RES	ERJ3GEYJ 100 V (10 Ω)	T	60.1/35.2
R9	7030003480	S.RES	ERJ3GEYJ 222 V (2.2 kΩ)	T	58.8/35.2
R10	7030003560	S.RES	ERJ3GEYJ 103 V (10 kΩ)	T	57.5/35.2
R11	7030003380	S.RES	ERJ3GEYJ 331 V (330 Ω)	T	51.3/32.5
R21	7030003440	S.RES	ERJ3GEYJ 102 V (1 kΩ)	T	58.4/44
R22	7030003440	S.RES	ERJ3GEYJ 102 V (1 kΩ)	T	44.3/47.6
R23	7030003640	S.RES	ERJ3GEYJ 473 V (47 kΩ)	T	44.3/50.4
R24	7030003440	S.RES	ERJ3GEYJ 102 V (1 kΩ)	T	53.9/59.2
R25	7030003320	S.RES	ERJ3GEYJ 101 V (100 Ω)	T	41.2/55.2
R26	7030003620	S.RES	ERJ3GEYJ 333 V (33 kΩ)	T	40.4/41.7
R27	7030003600	S.RES	ERJ3GEYJ 223 V (22 kΩ)	T	44.2/43.1
R28	7030003680	S.RES	ERJ3GEYJ 104 V (100 kΩ)	T	41.4/43.1
R31	7030003400	S.RES	ERJ3GEYJ 471 V (470 Ω)	T	66.2/47.9
R32	7030003660	S.RES	ERJ3GEYJ 683 V (68 kΩ)	T	64.9/47.9
R33	7030003360	S.RES	ERJ3GEYJ 221 V (220 Ω)	T	68.3/37.3
R34	7030003240	S.RES	ERJ3GEYJ 220 V (22 Ω)	T	68.9/35.3
R35	7030003360	S.RES	ERJ3GEYJ 221 V (220 Ω)	T	67/37.3
R41	7030003410	S.RES	ERJ3GEYJ 561 V (560 Ω)	T	56.7/58.9
R42	7030003550	S.RES	ERJ3GEYJ 822 V (8.2 kΩ)	T	54.8/47.3
R43	7030003550	S.RES	ERJ3GEYJ 822 V (8.2 kΩ)	T	50.8/49
R44	7030003320	S.RES	ERJ3GEYJ 101 V (100 Ω)	T	59.2/48
R45	7030003390	S.RES	ERJ3GEYJ 391 V (390 Ω)	T	56.2/48.6
R46	7030003350	S.RES	ERJ3GEYJ 181 V (180 Ω)	T	52.8/47
R51	7030003420	S.RES	ERJ3GEYJ 681 V (680 Ω)	T	61.4/53.4
R52	7030003660	S.RES	ERJ3GEYJ 683 V (68 kΩ)	T	58.6/52.1
R55	7030003320	S.RES	ERJ3GEYJ 101 V (100 Ω)	T	63.4/52.7
R56	7030003610	S.RES	ERJ3GEYJ 273 V (27 kΩ)	T	64.3/54.8
R74	7030003480	S.RES	ERJ3GEYJ 222 V (2.2 kΩ)	T	73.2/57.4
R81	7030003440	S.RES	ERJ3GEYJ 102 V (1 kΩ)	T	71.2/60.4
R82	7030003270	S.RES	ERJ3GEYJ 390 V (39 Ω)	T	59.6/66.8
R83	7030003480	S.RES	ERJ3GEYJ 222 V (2.2 kΩ)	T	57.6/67.6
R84	7030003390	S.RES	ERJ3GEYJ 391 V (390 Ω)	T	56.3/68.9
R85	7030003200	S.RES	ERJ3GEYJ 100 V (10 Ω)	T	50/68.2
R86	7030003560	S.RES	ERJ3GEYJ 103 V (10 kΩ)	T	52/68.9
R87	7030003560	S.RES	ERJ3GEYJ 103 V (10 kΩ)	T	51/77.3
R88	7030003320	S.RES	ERJ3GEYJ 101 V (100 Ω)	T	49/76.6
R91	7030003480	S.RES	ERJ3GEYJ 222 V (2.2 kΩ)	T	45.9/69.8
R92	7030003320	S.RES	ERJ3GEYJ 101 V (100 Ω)	T	48/70.2
R93	7030003240	S.RES	ERJ3GEYJ 220 V (22 Ω)	T	42.6/70.5
R94	7030003240	S.RES	ERJ3GEYJ 220 V (22 Ω)	T	43.9/70.5
R95	7030003440	S.RES	ERJ3GEYJ 102 V (1 kΩ)	T	46.7/72.5
R96	7030003270	S.RES	ERJ3GEYJ 390 V (39 Ω)	T	45.9/81.3
R101	7030003320	S.RES	ERJ3GEYJ 101 V (100 Ω)	T	60.8/77.7
R102	7030003600	S.RES	ERJ3GEYJ 223 V (22 kΩ)	T	63.6/76.4
R103	7030003460	S.RES	ERJ3GEYJ 152 V (1.5 kΩ)	T	67/72.7
R104	7030003600	S.RES	ERJ3GEYJ 223 V (22 kΩ)	T	71.6/78.3
R105	7030003320	S.RES	ERJ3GEYJ 101 V (100 Ω)	T	61.6/69.5

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)

S.=Surface mount

[MAIN UNIT]

REF NO.	ORDER NO.	DESCRIPTION	M.	H/V LOCATION
R106	7510001651	S.THM NTCG16 4BH 222JT	T	72.3/75
R107	7030003500	S.RES ERJ3GEYJ 332 V (3.3 kΩ)	T	72.3/76.3
R108	7030003860	S.RES ERJ3GE JPW V	T	62.8/78.5
R111	7030003800	S.RES ERJ3GEYJ 105 V (1 MΩ)	T	69.4/69.4
R112	7310005020	S.TRI RH03ADC14X (10 kΩ)	T	73.8/69
R113	7030003540	S.RES ERJ3GEYJ 682 V (6.8 kΩ)	T	78/69.5
R114	7030003360	S.RES ERJ3GEYJ 221 V (220 Ω)	T	77.6/78
R115	7030003440	S.RES ERJ3GEYJ 102 V (1 kΩ)	T	79.6/76.6
R116	7030003390	S.RES ERJ3GEYJ 391 V (390 Ω)	T	74.3/75.5
R121	7030005420	S.RES ERJ3GEYJ 202 V (2 kΩ)	T	84.4/82.1
R122	7030005420	S.RES ERJ3GEYJ 202 V (2 kΩ)	T	83.1/82.1
R123	7030005420	S.RES ERJ3GEYJ 202 V (2 kΩ)	T	88.5/74.4
R124	7030005420	S.RES ERJ3GEYJ 202 V (2 kΩ)	T	86.5/75.2
R125	7030001120	S.RES MCR50JZHJ 82 Ω (820)	T	83.4/69.7
R126	7030003670	S.RES ERJ3GEYJ 823 V (82 kΩ)	T	105.4/93.6
R127	7030003720	S.RES ERJ3GEYJ 224 V (220 kΩ)	T	78.3/75.9
R128	7030003690	S.RES ERJ3GEYJ 124 V (120 kΩ)	T	78.3/73.1
R146	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	T	110.5/57.1
R147	7030003320	S.RES ERJ3GEYJ 101 V (100 Ω)	T	106.4/57.4
R149	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	T	112.2/49.2
R150	7030003630	S.RES ERJ3GEYJ 393 V (39 kΩ)	T	111.2/55
R151	7030003640	S.RES ERJ3GEYJ 473 V (47 kΩ)	T	113.3/54.4
R152	7030003260	S.RES ERJ3GEYJ 330 V (33 Ω)	T	111.6/46.6
R153	7030004050	S.RES ERJ3GEYJ 1R0 V (1 Ω)	T	107.3/54.4
R154	7030003410	S.RES ERJ3GEY 561 V (560 Ω)	T	107.3/55.9
R155	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	T	100/59.5
R171	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	T	94/61.6
R172	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	T	90.5/62.2
R173	7030003560	S.RES ERJ3GEYJ 103 V (10 kΩ)	T	98.7/59.5
R176	7030003820	S.RES ERJ3GEYJ 155 V (1.5 MΩ)	T	81.2/57.7
R177	7030003600	S.RES ERJ3GEYJ 223 V (22 kΩ)	T	79.9/61.9
R178	7030003560	S.RES ERJ3GEYJ 103 V (10 kΩ)	T	76.6/59.4
R179	7030003480	S.RES ERJ3GEYJ 222 V (2.2 kΩ)	T	115.7/61
R180	7030003250	S.RES ERJ3GEYJ 270 V (27 Ω)	T	118/57.5
R181	7030003640	S.RES ERJ3GEYJ 473 V (47 kΩ)	T	79.9/57.7
R182	7030003200	S.RES ERJ3GEYJ 100 V (10 Ω)	T	81/49.9
R183	7030003440	S.RES ERJ3GEYJ 102 V (1 kΩ)	T	79.5/48.6
R185	7030003460	S.RES ERJ3GEYJ 152 V (1.5 kΩ)	T	81.9/44.9
R201	7030003460	S.RES ERJ3GEYJ 152 V (1.5 kΩ)	T	84.9/27.6
R202	7030003400	S.RES ERJ3GEYJ 471 V (470 Ω)	T	86.3/27.6
R203	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	T	84.2/24.8
R204	7030003460	S.RES ERJ3GEYJ 152 V (1.5 kΩ)	T	82.5/24.8
R205	7030003450	S.RES ERJ3GEYJ 122 V (1.2 kΩ)	T	96.7/30.9
R206	7030003390	S.RES ERJ3GEYJ 391 V (390 Ω)	T	85.6/30.4
R208	7030003500	S.RES ERJ3GEYJ 332 V (3.3 kΩ)	T	87.3/18.4
R209	7030003460	S.RES ERJ3GEYJ 152 V (1.5 kΩ)	T	90.6/21
R211	7030003760	S.RES ERJ3GEYJ 474 V (470 kΩ)	T	96.3/21.8
R212	7030003430	S.RES ERJ3GEYJ 821 V (820 Ω)	T	100.5/21.8
R213	7030003620	S.RES ERJ3GEYJ 333 V (33 kΩ)	T	101.9/21.8
R214	7310005040	S.TRI RH03ADCJ4X (22 kΩ)	T	99.6/26.1
R215	7510001671	S.THM NTCG16 4BH 103JT	T	103.3/24.6
R216	7030003480	S.RES ERJ3GEYJ 222 V (2.2 kΩ)	T	104.7/21.8
R217	7030003710	S.RES ERJ3GEYJ 184 V (180 kΩ)	T	104.7/24.6
R218	7030003580	S.RES ERJ3GEYJ 153 V (15 kΩ)	T	103.3/27.4
R219	7030003400	S.RES ERJ3GEYJ 471 V (470 Ω)	T	103.3/30.2
R222	7030003540	S.RES ERJ3GEYJ 682 V (6.8 kΩ)	T	76.4/21.7
R223	7030003490	S.RES ERJ3GEYJ 272 V (2.7 kΩ)	T	78.3/24.3
R224	7030003560	S.RES ERJ3GEYJ 103 V (10 kΩ)	T	80.1/24.3
R225	7030003660	S.RES ERJ3GEY 683 V (68 kΩ)	T	79.3/18.7
R226	7030003570	S.RES ERJ3GEYJ 123 V (12 kΩ)	T	76.6/18.7
R231	7030003600	S.RES ERJ3GEYJ 223 V (22 kΩ)	T	104/13.7
R232	7030003580	S.RES ERJ3GEYJ 153 V (15 kΩ)	T	104/8.1
R233	7030003440	S.RES ERJ3GEYJ 102 V (1 kΩ)	T	102.6/13.7
R234	7030003760	S.RES ERJ3GEYJ 474 V (470 kΩ)	T	102.6/10.9
R235	7030003720	S.RES ERJ3GEYJ 224 V (220 kΩ)	T	105.4/10.9
R236	7030003380	S.RES ERJ3GEYJ 331 V (330 Ω)	T	101.2/10.9
R237	7030003490	S.RES ERJ3GEYJ 272 V (2.7 kΩ)	T	99.8/10.9
R238	7030003620	S.RES ERJ3GEYJ 333 V (33 kΩ)	T	99.8/7.9
R239	7030003620	S.RES ERJ3GEYJ 333 V (33 kΩ)	T	97/7.9
R240	7030003480	S.RES ERJ3GEYJ 222 V (2.2 kΩ)	T	95.6/7.9
R241	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	T	13.8/23
R242	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	T	10.3/30.4
R243	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	T	13.8/21.7
R244	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	T	16.6/23
R245	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	T	16.1/35.1
R246	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	T	10.3/29.1
R247	7030003800	S.RES ERJ3GEYJ 105 V (1 MΩ)	T	16.1/33.8
R248	7030003800	S.RES ERJ3GEYJ 105 V (1 MΩ)	T	20.5/20.5
R249	7030003440	S.RES ERJ3GEYJ 102 V (1 kΩ)	T	28.9/29
R250	7030003800	S.RES ERJ3GEYJ 105 V (1 MΩ)	T	21.8/20.5
R251	7030003800	S.RES ERJ3GEYJ 105 V (1 MΩ)	T	22.7/22.5
R252	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	T	19.2/20.5
R253	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	T	17.9/20.5
R254	7030003800	S.RES ERJ3GEYJ 105 V (1 MΩ)	T	16.7/9.1
R256	7030003800	S.RES ERJ3GEYJ 105 V (1 MΩ)	T	19.3/9.1
R257	7030003490	S.RES ERJ3GEYJ 272 V (2.7 kΩ)	T	23.2/12
R258	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	T	20.6/9.1
R259	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	T	21.9/9.1
R262	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	T	27.7/10.4
R263	7030003800	S.RES ERJ3GEYJ 105 V (1 MΩ)	T	26.4/8.3
R264	7030003450	S.RES ERJ3GEYJ 122 V (1.2 kΩ)	T	32.8/11.8
R265	7030003520	S.RES ERJ3GEYJ 472 V (4.7 kΩ)	T	30.6/13.5
R266	7030003800	S.RES ERJ3GEYJ 105 V (1 MΩ)	T	30.3/20

[MAIN UNIT]

REF NO.	ORDER NO.	DESCRIPTION	M.	H/V LOCATION
R267	7030003800	S.RES ERJ3GEYJ 105 V (1 MΩ)	T	30.2/22.1
R268	7030003800	S.RES ERJ3GEYJ 105 V (1 MΩ)	T	31.6/20
R269	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	T	32.8/13.1
R271	7030003590	S.RES ERJ3GEYJ 183 V (18 kΩ)	T	113.4/36
R272	7030003620	S.RES ERJ3GEYJ 333 V (33 kΩ)	T	119/37.3
R273	7030003560	S.RES ERJ3GEYJ 103 V (10 kΩ)	T	116.2/37.3
R274	7030003560	S.RES ERJ3GEYJ 103 V (10 kΩ)	T	116.2/36
R275	7030003560	S.RES ERJ3GEYJ 103 V (10 kΩ)	T	116.2/30.8
R276	7030003440	S.RES ERJ3GEYJ 102 V (1 kΩ)	T	119/34.7
R277	7030003560	S.RES ERJ3GEYJ 103 V (10 kΩ)	T	119/33.4
R282	7030003760	S.RES ERJ3GEYJ 474 V (470 kΩ)	T	114.3/27.1
R283	7030003280	S.RES ERJ3GEYJ 470 V (47 Ω)	T	107.9/24.3
R284	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	T	118.9/16.4
R285	7030003630	S.RES ERJ3GEYJ 393 V (39 kΩ)	T	118.9/20.3
R286	7030003580	S.RES ERJ3GEYJ 153 V (15 kΩ)	T	118.9/21.6
R287	7030003470	S.RES ERJ3GEYJ 182 V (1.8 kΩ)	T	118.9/22.9
R292	7030003790	S.RES ERJ3GEYJ 824 V (820 kΩ)	T	18.9/53.3
R293	7030005321	S.RES ERA3YED 103V (10 kΩ)	T	18.9/54.7
R294	7030003200	S.RES ERJ3GEYJ 100 V (10 Ω)	T	34.1/49.3
R295	7030006091	S.RES ERA3YED 822V (8.2 kΩ)	T	17.7/56.8
R301	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	T	22.9/49.1
R302	7030003560	S.RES ERJ3GEYJ 103 V (10 kΩ)	T	22.9/50.5
R303	7030003480	S.RES ERJ3GEYJ 222 V (2.2 kΩ)	T	21.4/46.3
R304	7030003650	S.RES ERJ3GEYJ 563 V (56 kΩ)	T	18.5/47
R305	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	T	18.9/51.9
R306	7030003560	S.RES ERJ3GEYJ 103 V (10 kΩ)	T	18.5/45.6
R307	7030003540	S.RES ERJ3GEYJ 682 V (6.8 kΩ)	T	21.4/43.1
R308	7030003770	S.RES ERJ3GEYJ 564 V (560 kΩ)	T	18.5/43.1
R309	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	T	18.9/50.5
R311	7030003520	S.RES ERJ3GEYJ 472 V (4.7 kΩ)	T	18.5/40.3
R312	7030003610	S.RES ERJ3GEYJ 273 V (27 kΩ)	T	21.4/41.7
R313	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	T	25.7/41.7
R314	7030003590	S.RES ERJ3GEYJ 183 V (18 kΩ)	T	24.2/40.3
R315	7030003670	S.RES ERJ3GEYJ 823 V (82 kΩ)	T	28.5/40.3
R316	7030003670	S.RES ERJ3GEYJ 823 V (82 kΩ)	T	31.3/40.3
R317	7030003670	S.RES ERJ3GEYJ 823 V (82 kΩ)	T	34.1/41.7
R318	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	T	25.7/44.9
R319	7030003610	S.RES ERJ3GEYJ 273 V (27 kΩ)	T	27.2/51.9
R320	7030003800	S.RES ERJ3GEYJ 105 V (1 MΩ)	T	28.5/49.1
R321	7030003470	S.RES ERJ3GEYJ 182 V (1.8 kΩ)	T	25.7/49.1
R323	7030003560	S.RES ERJ3GEYJ 103 V (10 kΩ)	T	36.8/45.2
R324	7510001671	S.THM NTCG16 4BH 103JT	T	39.1/47.2
R325	7030003560	S.RES ERJ3GEYJ 103 V (10 kΩ)	T	36.5/47.2
R326	7030003580	S.RES ERJ3GEYJ 153 V (15 kΩ)	T	37.8/47.2
R327	7310005030	S.TRI RH03ADCS4X (47 kΩ)	T	36.9/38.4
R328	7030003550	S.RES ERJ3GEYJ 822 V (8.2 kΩ)	T	43.2/40.3
R341	7030003860	S.RES ERJ3GE JPW V	T	21.4/38.9
R353	7030003770	S.RES ERJ3GEYJ 564 V (560 kΩ)	T	9.4/70.6
R354	7030003580	S.RES ERJ3GEYJ 153 V (15 kΩ)	T	11.9/71.3
R355	7030003620	S.RES ERJ3GEYJ 333 V (33 kΩ)	T	7.4/70.6
R356	7030000100	S.RES MCR10EZHJ 4.7 Ω (4R7)	T	18.6/72.7
R382	7030003560	S.RES ERJ3GEYJ 103 V (10 kΩ)	T	21.5/59.5
R383	7030003440	S.RES ERJ3GEYJ 102 V (1 kΩ)	T	21.5/56.7
R384	7030003560	S.RES ERJ3GEYJ 103 V (10 kΩ)	T	25.3/59.5
R385	7030003440	S.RES ERJ3GEYJ 102 V (1 kΩ)	T	25.3/56.7
R386	7030003510	S.RES ERJ3GEYJ 392 V (3.9 kΩ)	T	36.5/68.3
R387	7030003510	S.RES ERJ3GEYJ 392 V (3.9 kΩ)	T	36.5/65.5
R403	7030003860	S.RES ERJ3GE JPW V	T	53.2/7
R404	7030003860	S.RES ERJ3GE JPW V	T	54.7/4.3
R411	7030003860	S.RES ERJ3GE JPW V	T	40.6/21.2
R413	7030003280	S.RES ERJ3GEYJ 470 V (47 Ω)	T	33/30.1
R415	7030003280	S.RES ERJ3GEYJ 470 V (47 Ω)	T	75.3/8.3
R416	7030003280	S.RES ERJ3GEYJ 470 V (47 Ω)	T	74/15.4
R417	7030003280	S.RES ERJ3GEYJ 470 V (47 Ω)	T	80.1/7.5
R421	7030003860	S.RES ERJ3GE JPW V	T	9.1/17.4
R423	7030003560	S.RES ERJ3GEYJ 103 V (10 kΩ)	T	8.5/27.8
R424	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	T	4.1/26
R431	7030003620	S.RES ERJ3GEYJ 333 V (33 kΩ)	T	6.2/24.3
R432	7030003560	S.RES ERJ3GEYJ 103 V (10 kΩ)	T	2.4/23.8
R433	7030000100	S.RES MCR10EZHJ 4.7 Ω (4R7)	T	7.8/31.9
R441	7030003640	S.RES ERJ3GEYJ 473 V (47 kΩ)	T	21/69.4
R442	7030003680	S.RES ERJ3GEYJ 104 V (100 kΩ)	T	22.9/71.3
C1	4030008880	S.CER C1608 JB 1H 223K-T	T	65.8/30.9
C2	4030006900	S.CER C1608 JB 1H 103K-T	T	63/25.7
C3	4030011600	S.CER C1608 JB 1E 104K-T	T	63/24.4
C4	4550000510	S.TAN TEESVA 1V 473M8L	T	61.8/37.7
C5	4550006560	S.TAN ECST1CY225R	T	55.4/37.7
C7	4030006860	S.CER C1608 JB 1H 102K-T	T	53.1/27.7
C11	4030007020	S.CER C1608 CH 1H 120J-T	T	51.3/35.1
C12	4610001590	S.TRI TZC3R100A110R00	T	47.8/35.3
C13	4030007040	S.CER C1608 CH 1H 180J-T	T	51.3/33.8
C20	4030006860	S.CER C1608 JB 1H 102K-T	T	41.2/53.9
C21	4510004630	S.ELE ECEV1CA100SR	T	72.7/37.2
C22	4030006900	S.CER C1608 JB 1H 103K-T	T	55.6/43.2
C23	4030006860	S.CER C1608 JB 1H 102K-T	T	44.3/49
C24	4030011340	S.CER C1608 CH 1H 471J-T	T	44.2/56.4
C26	4030006900	S.CER C1608 JB 1H 103K-T	T	44.2/44.5
C27	4030017490	S.CER C1608 JB 1A 105K-T	T	40.4/40.3
C29	4030011340	S.CER C1608 CH 1H 471J-T	T	49.8/55
C31	4030011340	S.CER C1608 CH 1H 471J-T	T	63.6/47.9

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)

S.=Surface mount

[MAIN UNIT]

REF NO.	ORDER NO.	DESCRIPTION	M.	H/V LOCATION
C32	4030009920	S.CER C1608 CH 1H 050B-T	T	62.3/49.6
C33	4030007050	S.CER C1608 CH 1H 220J-T	T	64.2/42.8
C34	4030007060	S.CER C1608 CH 1H 270J-T	T	62.4/45
C35	4030007060	S.CER C1608 CH 1H 270J-T	T	69.6/37.3
C36	4030006860	S.CER C1608 JB 1H 102K-T	T	66.1/35.3
C41	4030007080	S.CER C1608 CH 1H 390J-T	T	51.9/55.7
C42	4030007090	S.CER C1608 CH 1H 470J-T	T	51.9/54.3
C43	4550006130	S.TAN ECST1VY224R	T	59.9/56.9
C44	4030006860	S.CER C1608 JB 1H 102K-T	T	61.6/58.4
C45	4030009540	S.CER C1608 CH 1H 1R5B-T	T	53.5/50.4
C46	4030009540	S.CER C1608 CH 1H 1R5B-T	T	50.8/50.4
C47	4030006860	S.CER C1608 JB 1H 102K-T	T	53.5/49
C48	4030011340	S.CER C1608 CH 1H 471J-T	T	50.6/45.2
C49	4030011340	S.CER C1608 CH 1H 471J-T	T	57.2/46.6
C51	4030009560	S.CER C1608 CH 1H R75B-T	T	56.2/50.4
C52	4030011340	S.CER C1608 CH 1H 471J-T	T	58.6/53.4
C55	4030006860	S.CER C1608 JB 1H 102K-T	T	65.4/52.2
C56	4030011770	S.CER C1608 CH 1H 060B-T	T	64.3/50.6
C57	4030011340	S.CER C1608 CH 1H 471J-T	T	65.4/53.5
C58	4030007050	S.CER C1608 CH 1H 220J-T	T	65.4/59.2
C75	4030006860	S.CER C1608 JB 1H 102K-T	T	74.6/58.9
C77	4030009920	S.CER C1608 CH 1H 050B-T	T	77.1/61.5
C80	4030006860	S.CER C1608 JB 1H 102K-T	T	43.4/77.4
C81	4030006860	S.CER C1608 JB 1H 102K-T	T	58.3/69.6
C82	4030006860	S.CER C1608 JB 1H 102K-T	T	55.7/70.9
C83	4030007090	S.CER C1608 CH 1H 470J-T	T	55.6/66.8
C84	4030007040	S.CER C1608 CH 1H 180J-T	T	55/68.9
C85	4030007040	S.CER C1608 CH 1H 180J-T	T	52.5/74.5
C86	4030006860	S.CER C1608 JB 1H 102K-T	T	48.7/74.4
C87	4030007090	S.CER C1608 CH 1H 470J-T	T	49/77.9
C88	4030006860	S.CER C1608 JB 1H 102K-T	T	49/79.2
C91	4030007040	S.CER C1608 CH 1H 180J-T	T	50/69.6
C92	4030006860	S.CER C1608 JB 1H 102K-T	T	39.1/56.7
C93	4030006860	S.CER C1608 JB 1H 102K-T	T	43.4/78.7
C94	4030009530	S.CER C1608 CH 1H 030B-T	T	45.9/71.1
C95	4030006860	S.CER C1608 JB 1H 102K-T	T	46.2/77.4
C96	4030007090	S.CER C1608 CH 1H 470J-T	T	46.2/78.7
C97	4030011340	S.CER C1608 CH 1H 471J-T	T	46.2/80
C101	4030007050	S.CER C1608 CH 1H 220J-T	T	43.1/72.5
C102	4030007040	S.CER C1608 CH 1H 180J-T	T	41.4/78.2
C103	4030007080	S.CER C1608 CH 1H 390J-T	T	40.1/78.2
C104	4030007040	S.CER C1608 CH 1H 180J-T	T	41.4/81.8
C105	4030006860	S.CER C1608 JB 1H 102K-T	T	60/75.7
C106	4030011600	S.CER C1608 JB 1E 104K-T	T	64.4/78.5
C107	4030006860	S.CER C1608 JB 1H 102K-T	T	65/74
C108	4030006860	S.CER C1608 JB 1H 102K-T	T	60/72.9
C109	4510004630	S.ELE ECEV1CA100SR	T	56.2/74.7
C111	4030007090	S.CER C1608 CH 1H 470J-T	T	69/82.6
C112	4030011340	S.CER C1608 CH 1H 471J-T	T	71/82.1
C113	4030006860	S.CER C1608 JB 1H 102K-T	T	72.3/82.1
C114	4030011600	S.CER C1608 JB 1E 104K-T	T	73.6/82.1
C115	4030011600	S.CER C1608 JB 1E 104K-T	T	59.1/79.7
C116	4030007010	S.CER C1608 CH 1H 100D-T	T	57.8/79.7
C117	4030007170	S.CER C1608 CH 1H 221J-T	T	61.1/80.5
C118	4510005310	S.ELE ECEV1CA220SR	T	68/78.3
C119	4030006860	S.CER C1608 JB 1H 102K-T	T	66/69.3
C120	4030006860	S.CER C1608 JB 1H 102K-T	T	69.4/68.1
C121	4010005500	CER HM60SJ CH 150J 500V		
C122	4030006860	S.CER C1608 JB 1H 102K-T	T	81.3/82.1
C123	4030006860	S.CER C1608 JB 1H 102K-T	T	85.2/75.2
C124	4010005500	CER HM60SJ CH 150J 500V		
C125	4030006860	S.CER C1608 JB 1H 102K-T	T	85.9/71.9
C126	4010005790	CER HM60SJ YB 102K 500V		
C127	4010008050	CER HM60SJ CH 180J 500V		
C128	4010005440	CER HM60SJ CH 060D 500V		
C129	4010008070	CER HM60SJ CH 220J 500V		
C130	4010005430	CER HM60SJ CH 050C 500V		
C132	4010005430	CER HM60SJ CH 050C 500V		
C133	4030006860	S.CER C1608 JB 1H 102K-T	T	73/78.3
C134	4030006900	S.CER C1608 JB 1H 103K-T	T	68.5/74
C136	4030006860	S.CER C1608 JB 1H 102K-T	T	71.4/72.5
C138	4030006860	S.CER C1608 JB 1H 102K-T	T	83.2/76.8
C139	4030006860	S.CER C1608 JB 1H 102K-T	T	80.6/74.1
C140	4030006860	S.CER C1608 JB 1H 102K-T	T	76.3/74.8
C142	4010007630	CER HM60SJ CH 270J 500V		
C148	4030006860	S.CER C1608 JB 1H 102K-T	T	112.9/61.6
C149	4030009500	S.CER C1608 CH 1H 0R5B-T	T	113.4/58.4
C150	4030006860	S.CER C1608 JB 1H 102K-T	T	120.6/58.2
C151	4030007010	S.CER C1608 CH 1H 100D-T	T	119.3/55.2
C152	4030007010	S.CER C1608 CH 1H 100D-T	T	120.6/55.2
C153	4030009920	S.CER C1608 CH 1H 050B-T	T	113/51.5
C154	4030011770	S.CER C1608 CH 1H 060B-T	T	113.3/57.1
C155	4030006860	S.CER C1608 JB 1H 102K-T	T	111.4/60.3
C156	4030011600	S.CER C1608 JB 1E 104K-T	T	107.4/59.5
C157	4030006860	S.CER C1608 JB 1H 102K-T	T	109.5/47.9
C158	4030006900	S.CER C1608 JB 1H 103K-T	T	113.3/55.8
C159	4030006860	S.CER C1608 JB 1H 102K-T	T	111.6/47.9
C160	4030011600	S.CER C1608 JB 1E 104K-T	T	109.8/55
C161	4030009350	S.CER C1608 CH 1H 3R5B-T	T	102.6/55.7
C162	4030011770	S.CER C1608 CH 1H 060B-T	T	103.4/57.8
C163	4030006860	S.CER C1608 JB 1H 102K-T	T	102.1/60.5
C164	4030009530	S.CER C1608 CH 1H 030B-T	T	102.2/54.4
C165	4030006860	S.CER C1608 JB 1H 102K-T	T	95.5/60.3

[MAIN UNIT]

REF NO.	ORDER NO.	DESCRIPTION	M.	H/V LOCATION
C173	4030011770	S.CER C1608 CH 1H 060B-T	T	93.9/57.5
C174	4030009910	S.CER C1608 CH 1H 040B-T	T	96/56.8
C175	4030009500	S.CER C1608 CH 1H 0R5B-T	T	92.6/57.5
C176	4030009560	S.CER C1608 CH 1H R75B-T	T	91.5/59.5
C177	4030009530	S.CER C1608 CH 1H 030B-T	T	87/59.5
C178	4030011770	S.CER C1608 CH 1H 060B-T	T	89.1/60.3
C179	4030011600	S.CER C1608 JB 1E 104K-T	T	88.4/63
C180	4030006860	S.CER C1608 JB 1H 102K-T	T	115.7/59.7
C181	4030006860	S.CER C1608 JB 1H 102K-T	T	119.3/58.2
C182	4030006860	S.CER C1608 JB 1H 102K-T	T	81.7/52.1
C183	4030009920	S.CER C1608 CH 1H 050B-T	T	81.2/54.9
C184	4030006900	S.CER C1608 JB 1H 103K-T	T	81.2/61.5
C185	4030009920	S.CER C1608 CH 1H 050B-T	T	76.9/51.2
C186	4030007100	S.CER C1608 CH 1H 560J-T	T	78.2/49.9
C187	4030011600	S.CER C1608 JB 1E 104K-T	T	79.8/53.2
C188	4030006860	S.CER C1608 JB 1H 102K-T	T	79.7/51.2
C189	4030006860	S.CER C1608 JB 1H 102K-T	T	81/46.9
C193	4030011770	S.CER C1608 CH 1H 060B-T	T	82.4/37.4
C195	4030006860	S.CER C1608 JB 1H 102K-T	T	82.5/27.6
C202	4030008880	S.CER C1608 JB 1H 223K-T	T	89.1/27.6
C203	4030006860	S.CER C1608 JB 1H 102K-T	T	85.6/24.8
C204	4030006900	S.CER C1608 JB 1H 103K-T	T	87.7/27.6
C205	4030007130	S.CER C1608 CH 1H 101J-T	T	93.9/30.9
C207	4030006860	S.CER C1608 JB 1H 102K-T	T	88.6/19.9
C208	4510004630	S.ELE ECEV1CA100SR	T	86.7/34.9
C209	4030006900	S.CER C1608 JB 1H 103K-T	T	88.3/30.9
C210	4030006860	S.CER C1608 JB 1H 102K-T	T	101.5/33.8
C211	4030011280	S.CER C1608 CH 1H 271J-T	T	99.1/21.8
C212	4030011280	S.CER C1608 CH 1H 271J-T	T	97.7/21.8
C213	4030006860	S.CER C1608 JB 1H 102K-T	T	99.5/30.9
C214	4030011600	S.CER C1608 JB 1E 104K-T	T	102.8/33.8
C215	4030017490	S.CER C1608 JB 1A 105K-T	T	93.3/21
C216	4030011600	S.CER C1608 JB 1E 104K-T	T	96.3/24.6
C217	4030007050	S.CER C1608 CH 1H 220J-T	T	103.3/21.8
C218	4030011600	S.CER C1608 JB 1E 104K-T	T	104.7/27.4
C219	4030006860	S.CER C1608 JB 1H 102K-T	T	104.7/30.2
C220	4030006860	S.CER C1608 JB 1H 102K-T	T	96.3/28.5
C221	4030011810	S.CER C1608 JB 1A 224K-T	T	91.1/30.9
C222	4030011810	S.CER C1608 JB 1A 224K-T	T	73.4/22.2
C223	4030011600	S.CER C1608 JB 1E 104K-T	T	73.4/25
C231	4030011810	S.CER C1608 JB 1A 224K-T	T	104/16.5
C232	4030011600	S.CER C1608 JB 1E 104K-T	T	105.4/13.7
C233	4030008880	S.CER C1608 JB 1H 223K-T	T	104/10.9
C234	4030008880	S.CER C1608 JB 1H 223K-T	T	105.4/8.1
C235	4510004630	S.ELE ECEV1CA100SR	T	108.6/9.5
C236	4030006870	S.CER C1608 JB 1H 222K-T	T	98.4/7.9
C237	4030010040	S.CER C1608 JB 1H 561K-T	T	95.6/10.9
C238	4510005860	S.ELE ECEV1HA2R2SR	T	91.8/9.9
C241	4510005860	S.ELE ECEV1HA2R2SR	T	20.8/27.1
C243	4510005860	S.ELE ECEV1HA2R2SR	T	13.6/18.5
C246	4510005860	S.ELE ECEV1HA2R2SR	T	20.8/32
C247	4030006900	S.CER C1608 JB 1H 103K-T	T	102.6/16.5
C248	4030017490	S.CER C1608 JB 1A 105K-T	T	29.3/30.4
C249	4030011810	S.CER C1608 JB 1A 224K-T	T	23.9/24.8
C250	4030017490	S.CER C1608 JB 1A 105K-T	T	24.5/9.8
C251	4030006900	S.CER C1608 JB 1H 103K-T	T	23.2/9.1
C262	4030006860	S.CER C1608 JB 1H 102K-T	T	23.2/15.8
C263	4510005860	S.ELE ECEV1HA2R2SR	T	31.6/8.7
C264	4030011810	S.CER C1608 JB 1A 224K-T	T	30.3/16.7
C265	4510005860	S.ELE ECEV1HA2R2SR	T	34/16.2
C271	4030011600	S.CER C1608 JB 1E 104K-T	T	113.4/37.3
C272	4030009880	S.CER C1608 JB 1H 682K-T	T	119/36
C273	4030006900	S.CER C1608 JB 1H 103K-T	T	113.4/34.7
C274	4030008880	S.CER C1608 JB 1H 223K-T	T	116.2/34.7
C275	4030006870	S.CER C1608 JB 1H 222K-T	T	119/30.8
C276	4030009880	S.CER C1608 JB 1H 682K-T	T	119/32.1
C281	4030011600	S.CER C1608 JB 1E 104K-T	T	116.2/29.5
C282	4030011810	S.CER C1608 JB 1A 224K-T	T	111.5/27.1
C284	4030011600	S.CER C1608 JB 1E 104K-T	T	108.7/27.1
C285	4510004630	S.ELE ECEV1CA100SR	T	110.3/30.3
C286	4340000310	S.MLR ECHU 1C 333JX5	T	119/26.1
C287	4030006870	S.CER C1608 JB 1H 222K-T	T	118.9/15.1
C288	4030011600	S.CER C1608 JB 1E 104K-T	T	118.9/19
C289	4030006900	S.CER C1608 JB 1H 103K-T	T	118.9/17.7
C291	4510004630	S.ELE ECEV1CA100SR	T	13.9/55.1
C292	4030006900	S.CER C1608 JB 1H 103K-T	T	29.9/55.5
C293	4030006860	S.CER C1608 JB 1H 102K-T	T	29.1/54
C301	4030011600	S.CER C1608 JB 1E 104K-T	T	22.9/51.9
C302	4030006900	S.CER C1608 JB 1H 103K-T	T	22.9/47.7
C303	4030011280	S.CER C1608 CH 1H 271J-T	T	18.5/48.4
C304	4030006900	S.CER C1608 JB 1H 103K-T	T	9.9/51.9
C305	4030011600	S.CER C1608 JB 1E 104K-T	T	21.4/44.9
C306	4030007020	S.CER C1608 CH 1H 120J-T	T	18.5/41.7
C311	4030017480	S.CER C1608 JB 1A 474K-T	T	21.4/40.3
C312	4030009490	S.CER C1608 JB 1H 821K-T	T	28.5/41.7
C313	4030006880	S.CER C1608 JB 1H 472K-T	T	31.3/41.7
C314	4030007100	S.CER C1608 CH 1H 560J-T	T	36.9/41.9
C315	4030006900	S.CER C1608 JB 1H 103K-T	T	31.3/49.1
C316	4510004630	S.ELE ECEV1CA100SR	T	32.9/52.4
C317	4030011810	S.CER C1608 JB 1A 224K-T	T	25.7/50.5
C318	4030007090	S.CER C1608 CH 1H 470J-T	T	28.5/50.5
C322	4030017490	S.CER C1608 JB 1A 105K-T	T	25/43.5
C323	4030009880	S.CER C1608 JB 1H 682K-T	T	36.8/43.3

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)

S.=Surface mount

[MAIN UNIT]

REF NO.	ORDER NO.	DESCRIPTION	M.	H/V LOCATION
C331	4030006900	S.CER C1608 JB 1H 103K-T	T	51.5/4.4
C332	4030006860	S.CER C1608 JB 1H 102K-T	T	42.1/7.1
C333	4030006900	S.CER C1608 JB 1H 103K-T	T	42.1/5.8
C334	4030007050	S.CER C1608 CH 1H 220J-T	T	63.7/21.7
C335	4030006860	S.CER C1608 JB 1H 102K-T	T	65/21.7
C336	4030006860	S.CER C1608 JB 1H 102K-T	T	67/12.7
C337	4030007050	S.CER C1608 CH 1H 220J-T	T	53.1/3
C338	4030006860	S.CER C1608 JB 1H 102K-T	T	68.7/24.4
C339	4030007090	S.CER C1608 CH 1H 470J-T	T	68.7/25.7
C340	4030007090	S.CER C1608 CH 1H 470J-T	T	68.7/28.3
C341	4030007090	S.CER C1608 CH 1H 470J-T	T	68.7/29.6
C342	4030006860	S.CER C1608 JB 1H 102K-T	T	38/13.5
C343	4030006860	S.CER C1608 JB 1H 102K-T	T	39.3/7.5
C344	4030011340	S.CER C1608 CH 1H 471J-T	T	17.3/75.4
C345	4030011340	S.CER C1608 CH 1H 471J-T	T	16/73.9
C346	4030006860	S.CER C1608 JB 1H 102K-T	T	50.4/7.5
C347	4030007120	S.CER C1608 CH 1H 820J-T	T	50.4/6.2
C348	4030007120	S.CER C1608 CH 1H 820J-T	T	42.2/15.2
C349	4030006860	S.CER C1608 JB 1H 102K-T	T	42.2/13.9
C351	4030006900	S.CER C1608 JB 1H 103K-T	T	10.7/68.7
C352	4510005860	S.ELE ECEV1HA2R2SR	T	15.5/69.2
C353	4030017490	S.CER C1608 JB 1A 105K-T	T	5/72.8
C354	4030006860	S.CER C1608 JB 1H 102K-T	T	4.1/74.8
C355	4510009210	ELE 16 WXA 470 M 8X9		
C356	4510004590	ELE 16 MV 470 HC		
C357	4030011600	S.CER C1608 JB 1E 104K-T	T	18.6/74.9
C358	4030007090	S.CER C1608 CH 1H 470J-T	T	4.1/77.7
C359	4030007090	S.CER C1608 CH 1H 470J-T	T	5.4/77.7
C360	4030006860	S.CER C1608 JB 1H 102K-T	T	9.2/61.9
C361	4030006860	S.CER C1608 JB 1H 102K-T	T	10.6/61.9
C367	4030006860	S.CER C1608 JB 1H 102K-T	T	35.6/78.5
C368	4030007090	S.CER C1608 CH 1H 470J-T	T	32.4/81.9
C369	4510006021	ELE 2200 16V ME-HC		
C370	4030011600	S.CER C1608 JB 1E 104K-T	T	19.3/66.8
C373	4030007050	S.CER C1608 CH 1H 220J-T	T	54.6/82.6
C374	4030007050	S.CER C1608 CH 1H 220J-T	T	39.3/72.9
C375	4030007130	S.CER C1608 CH 1H 101J-T	T	38/72.9
C376	4030011340	S.CER C1608 CH 1H 471J-T	T	36.7/72.9
C377	4030007090	S.CER C1608 CH 1H 470J-T	T	5.4/80.5
C378	4030006860	S.CER C1608 JB 1H 102K-T	T	4.1/80.5
C379	4030007130	S.CER C1608 CH 1H 101J-T	T	34.3/78.5
C380	4030011340	S.CER C1608 CH 1H 471J-T	T	34.6/81.9
C381	4510006220	S.ELE ECEV1CA101UP	T	4.5/56.3
C382	4030006900	S.CER C1608 JB 1H 103K-T	T	6.3/62.5
C383	4030011600	S.CER C1608 JB 1E 104K-T	T	5.7/65
C384	4030011600	S.CER C1608 JB 1E 104K-T	T	7/67.8
C385	4030006900	S.CER C1608 JB 1H 103K-T	T	5.7/67.8
C386	4510006220	S.ELE ECEV1CA101UP	T	14.8/61.8
C387	4030011600	S.CER C1608 JB 1E 104K-T	T	30/58.9
C388	4030006860	S.CER C1608 JB 1H 102K-T	T	21.1/61.6
C389	4510004630	S.ELE ECEV1CA100SR	T	24.9/63.8
C390	4030011600	S.CER C1608 JB 1E 104K-T	T	32/56.4
C391	4030006860	S.CER C1608 JB 1H 102K-T	T	30/60.2
C392	4510004630	S.ELE ECEV1CA100SR	T	32.8/63.8
C393	4510004630	S.ELE ECEV1CA100SR	T	39.6/65.6
C411	4030006900	S.CER C1608 JB 1H 103K-T	T	39.9/24.3
C412	4030007090	S.CER C1608 CH 1H 470J-T	T	37.2/22.7
C421	4510005860	S.ELE ECEV1HA2R2SR	T	11.5/13.6
C422	4510005860	S.ELE ECEV1HA2R2SR	T	10/23.8
C423	4030011600	S.CER C1608 JB 1E 104K-T	T	8.4/10.7
C424	4030007090	S.CER C1608 CH 1H 470J-T	T	2.4/20.5
C425	4030007090	S.CER C1608 CH 1H 470J-T	T	2/12.8
C431	4030017480	S.CER C1608 JB 1A 474K-T	T	4.4/21.5
C432	4030017490	S.CER C1608 JB 1A 105K-T	T	5/27.8
C433	4030006860	S.CER C1608 JB 1H 102K-T	T	4.1/29.8
C441	4030006860	S.CER C1608 JB 1H 102K-T	T	26.8/67.9
C443	4510004590	ELE 16 MV 470 HC		
C444	4510004590	ELE 16 MV 470 HC		
C445	4030011600	S.CER C1608 JB 1E 104K-T	T	5.4/32.6
C446	4030007090	S.CER C1608 CH 1H 470J-T	T	4.1/32.6
J2	6510015540	S.CNR B4B-ZR-SM3-TF	T	79.5/12.5
J3	6510015540	S.CNR B4B-ZR-SM3-TF	T	37.7/27.2
J4	6510021720	S.CNR 30FLT-SM1-TB	T	46/10.5
J5	6510021720	S.CNR 30FLT-SM1-TB	T	62.9/16.5
W1	7120000470	JMP ERDS2T0		
W2	9091201210	WIR 74/98/050/X99/X99		
W3	7120000470	JMP ERDS2T0		
W4	8900014020	CBL OPC-1439 <TJM>		
W5	8900014020	CBL OPC-1439 <TJM>		
W6	7120000470	JMP ERDS2T0		
EP2	9033003901	TUB IRRAX 1.0 (d) L=2 mm		
EP3	6910017290	TUB IRRAX 1.5 (d) L=30 mm		
EP341	6910014690	S.BEA MPZ1608S221A-T	T	9.9/63.9
EP342	6910014690	S.BEA MPZ1608S221A-T	T	10/66.7
EP441	6910014690	S.BEA MPZ1608S221A-T	T	9.4/34.1
EP442	6910014690	S.BEA MPZ1608S221A-T	T	7.4/35.7

[VR BOARD]

REF NO.	ORDER NO.	DESCRIPTION	M.	H/V LOCATION
R1	7210003220	VAR TP96N97A-15.7SK-10KB-2852		
W1	8900014010	CBL OPC-1442		

[SQL BOARD]

REF NO.	ORDER NO.	DESCRIPTION	M.	H/V LOCATION
R1	7210003150	VAR TP96N97-15SK-10KB-2685		

[CHASSIS PARTS]

REF NO.	ORDER NO.	DESCRIPTION	M.	H/V LOCATION
J1	6510004880	CNR MR-DS-E 01		
W1	8900014000	CBL OPC-1405 <TJM>		
W2	8900014090	CBL OPC-1489		

6-2 HM-150B/SW

[MAIN UNIT]

REF NO.	ORDER NO.	DESCRIPTION	M.	H/V LOCATION
R1	7010007590	RES 12K R20		
R2	7010007600	RES 6.8K R20		
R3	7010007610	RES 15K R20		
R4	7010007620	RES 33K R20		
C1	4030018660	S.CER 0.022 C1608 16V B	B	40.9/43.6
MC1	7700002640	MIC KUC3523-040245		
S1	2260002780	SW SKHHLPA010		
S2	2260002790	SW KHHAMA010		
S3	2260002790	SW KHHAMA010		
S4	2260002790	SW KHHAMA010		
W1	9027150010	W 71/98/010/X98/X98		
W2	9027150010	W 71/98/010/X98/X98		
W3	9027150020	W 24/00/020/W01/W01		
W4	9027150030	W 24/04/020/W01/W01		

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)
S.=Surface mount

SECTION 7 MECHANICAL PARTS AND DISASSEMBLY

7-1 IC-M422

[CHASSIS PARTS]

REF. NO.	ORDER NO.	DESCRIPTION		QTY.
J1	6510004880	Connector MR-DSE-01		1
W1	8900014000	Cable OPC-1405 <TJM>		1
W2	8900014090	Cable OPC-1489 <AI>		1
MP1	8510016590	Case 2807 CASE	[BLK]	1
	8510016620	Case 2807 CASE(A)	[SW]	1
MP2	8830001730	Screw ultra sert UD-45058 NI		2
MP4	8930055070	2438 sheet		1
MP5	8930064040	2807 R-packing seal		1
MP11	8010020100	2852 chassis		1
MP12	8930034300	1542 ANT seal <KN>		1
MP13	8810002950	Screw M3x6 SUS		2
MP14	8930064350	2807 R-bush plate		1
MP16	8930064390	2807 module plate		1
MP17	8510016700	2807 module cover		1
MP19	8810008660	Screw PH B0 3x8 NI-ZU (BT)		2
MP20	8950000180	Cable tie-80		1
MP21	8930066630	2852 IC clip		1
MP22	8930067170	2852 B-IC clip		1
MP23	8810008660	Screw PH BB0 3x8 NI-ZU (BT)		6
MP40	8810004540	Screw M3x8 SUS		4
MP41	8930064030	2807 F-packing seal		1
MP42	8810004700	Screw PH A0 3x16 SUS		4
MP47	8930049040	Isolating sheet (FQ)		1
MP48	8930055040	2438 cap <KN>		1

[FRONT UNIT]

REF. NO.	ORDER NO.	DESCRIPTION		QTY.
MC1	0800007890	Mocrophone HM-150B ACC <FG>	[BLK]	1
	0800007900	Mocrophone HM-150SW ACC <FG>	[SW]	1
SP1	2510001240	Speaker 045P0803		1
MP1	8210021840	2807 front panel (B)	[BLK]	1
	8210021850	2807 front panel (C)	[SW]	1
MP21	8930052280	O-ring (AC)		2
MP22	8930060490	2685 F-bush plate		1
MP23	8930055840	2490 grounding spring		1
MP25	8810008660	Screw PH B0 3X8 NI-ZU (BT)		4
MP31	8610011370	Knob N-312	[BLK]	2
	8610012140	Knob N-312(C)	[SW]	2

[VR BOARD]

REF. NO.	ORDER NO.	DESCRIPTION	QTY.
W1	8900014010	OPC-1442	1

[LOGIC BOARD]

REF. NO.	ORDER NO.	DESCRIPTION	QTY.
DS1	5030002850	LCD IS08328E	1
EP2	8930066470	LCD contact SRCN-2852-SP-N-W	1
MP1	8930066230	2852 LCD holder	1
MP2	8210020990	2807 reflector	1
MP3	8930066400	2852 LCD filter	1
MP4	8930066390	2852 LCD sheet	1
MP5	8930064860	2807 sponge	1

[MAIN UNIT]

REF. NO.	ORDER NO.	DESCRIPTION	QTY.
W4	8900014020	OPC-1439 <TJM>	1
W5	8900014020	OPC-1439 <TJM>	1
MP2	8510014950	2601 VCO cover	1

[ACCESSORIES]

REF. NO.	ORDER NO.	DESCRIPTION		QTY.
W1	8900009040	OPC-891		1
MP1	8950005110	2289 mic hanger		1
MP2	8010019790	2807 mobile bracket	[BLK]	1
	8010019810	2807 mobile bracket (A)	[SW]	1
MP3	8610010561	2040 screw knob bolt-1 <KN>	[BLK]	2
	8610011260	2040 knob bolt(B)-1 <KN>	[SW]	2
MP4	8810004700	Screw PH A0 3x16 SUS		2
MP5	8810001490	Screw PH A0 5x20 SUS		2
MP6	8850000180	Flat washer M5 SUS		2
MP7	8850000500	S-washer M5 SUS		2
MP8	8310050900	2438 caution sticker		1

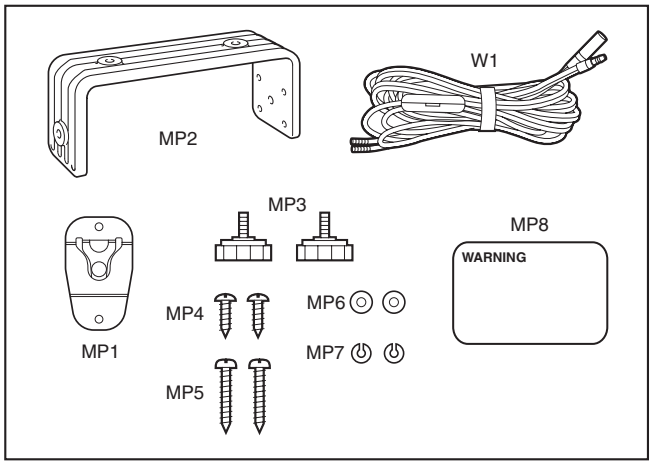

Screw abbreviations A0, B0, BT: Self-tapping
PH: Pan head
NI: Nickel
SUS: Stainless
NI-ZU: Nickel-Zinc

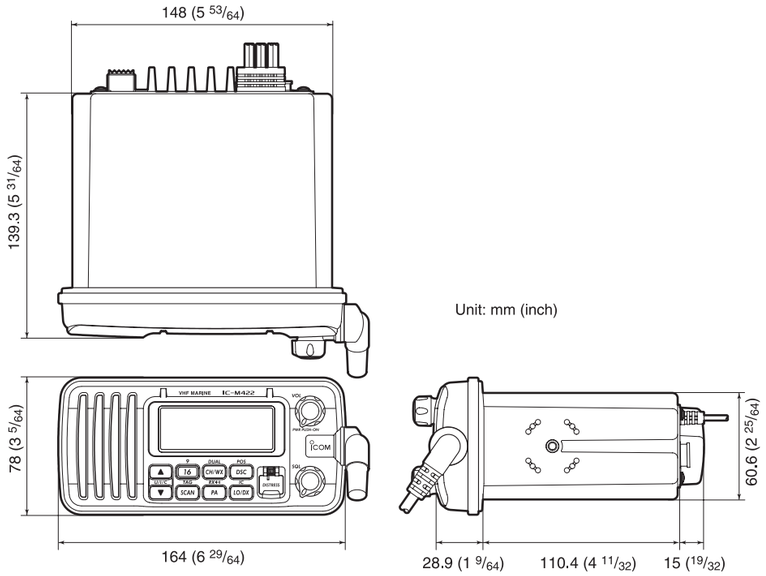

Unit: mm (inch)

NOTE 2

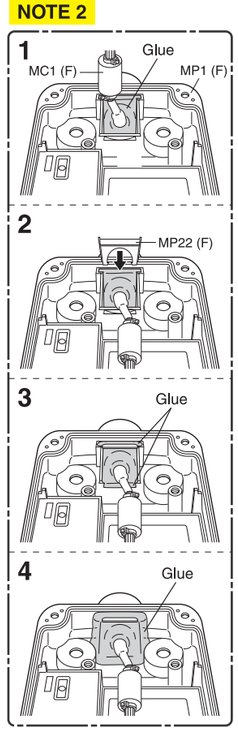

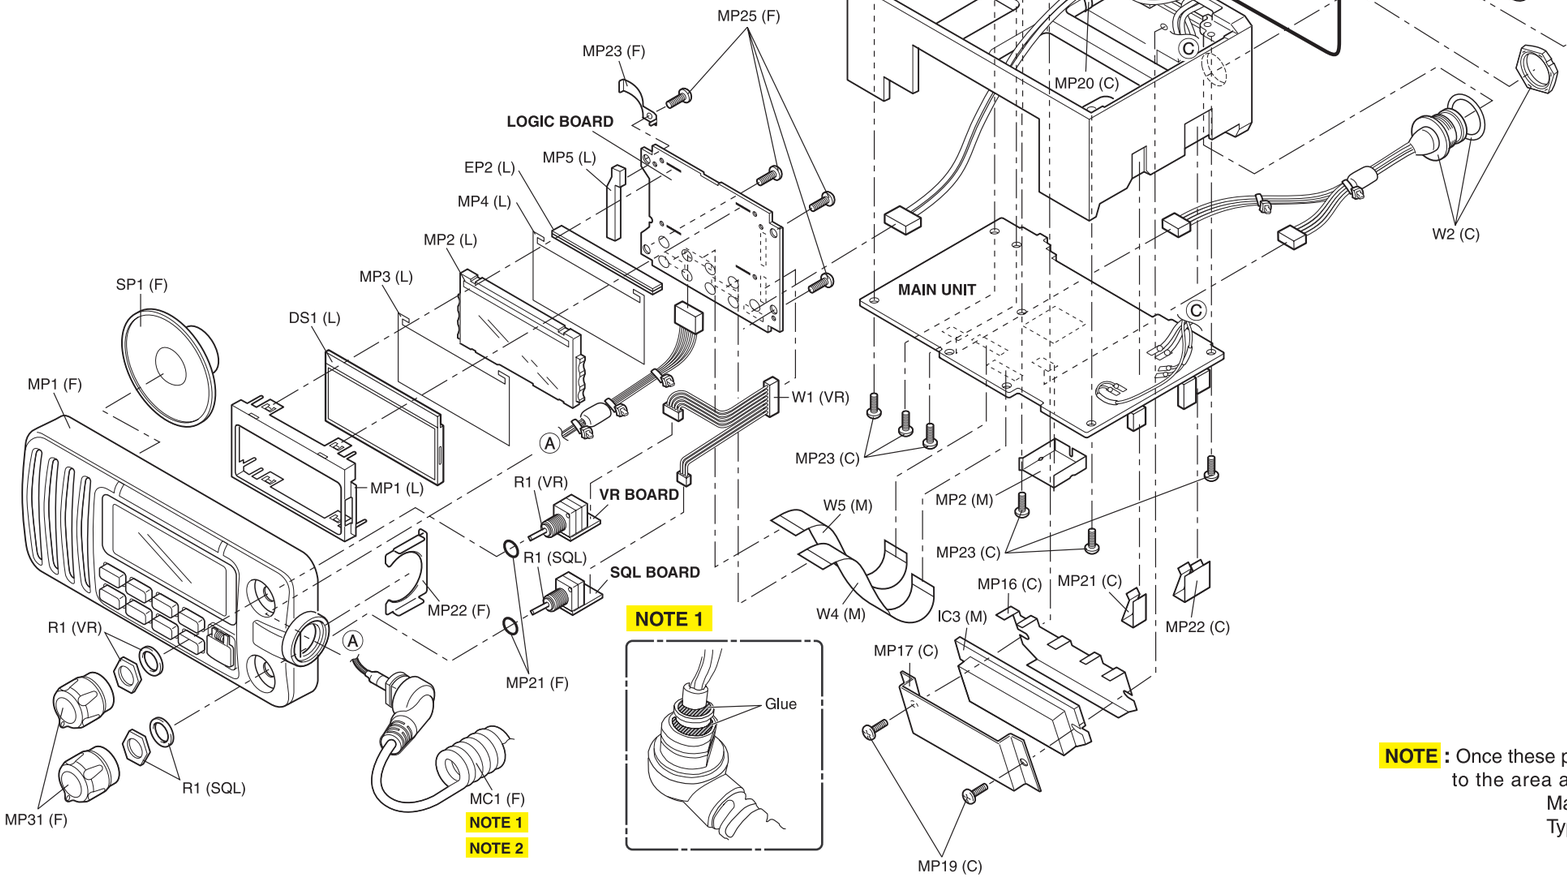



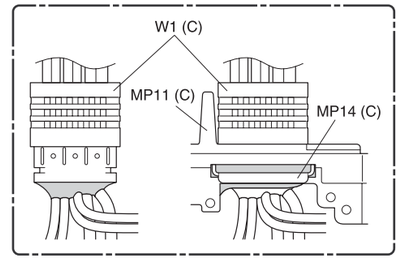

NOTE : Once these parts are removed, the glue must be applied to the area as described when assembling.
Manufacture : Cemedine Co.
Type : Super-X

UNIT abbreviations (C): CHASSIS PARTS, (L): LOGIC BOARD, (M): MAIN UNIT, (F): FRONT UNIT
(VR): VR BOARD, (SQL): SQL BOARD

SECTION 8 SEMICONDUCTOR INFORMATION

● TRANSISTOR AND FET'S

2SA1576A (Symbol: FA) 	**2SC3775-3** (Symbol: OY3) 	**2SC4081-S** (Symbol: BS) 	**2SC4213-B** (Symbol: AB) 	**2SC4215-O** (Symbol: QO) 
2SC4226-R25 (Symbol: R25) 	**2SK1069-4-TL** (Symbol: FJ) 	**3SK131-T2-LA** (Symbol: V12) 	**DTA144 EUA** (Symbol: 16) 	**KRC404 RTK/P** (Symbol: ND) 
KTA1664V-RTF/P (Symbol: R) 	**KTA2015Y-RTK/P** (Symbol: Z) 	**KTC3880S Y-RTK/P** (Symbol: AQ) 	**KTC4075 BL-RTK/P** (Symbol: L) 	**TPC6104 (TE85L, F)** (Symbol: VS-6) 

● DIODES

1SS355 (Symbol: A) 	**1SV307** (Symbol: TX) 	**DSA3A1** (Symbol: Green) 	**HSM88ASR** (Symbol: C3) 	**HVC350BTRF** (Symbol: B0) 
KDS122 RTK/P (Symbol: C3) 	**KDV214E RTK/P** (Symbol: UO) 	**MA2S111** (Symbol: A) 	**MA77** (Symbol: 4B) 	**MA8062-M** (Symbol: 6-2) 
XB15A308 (Symbol: T8) 				

SECTION 9 BOARD LAYOUTS

The combination of this page and the next page shows the unit layout in the same configuration as the actual P.C. Board.

9-1 LOGIC BOARD

• TOP VIEW

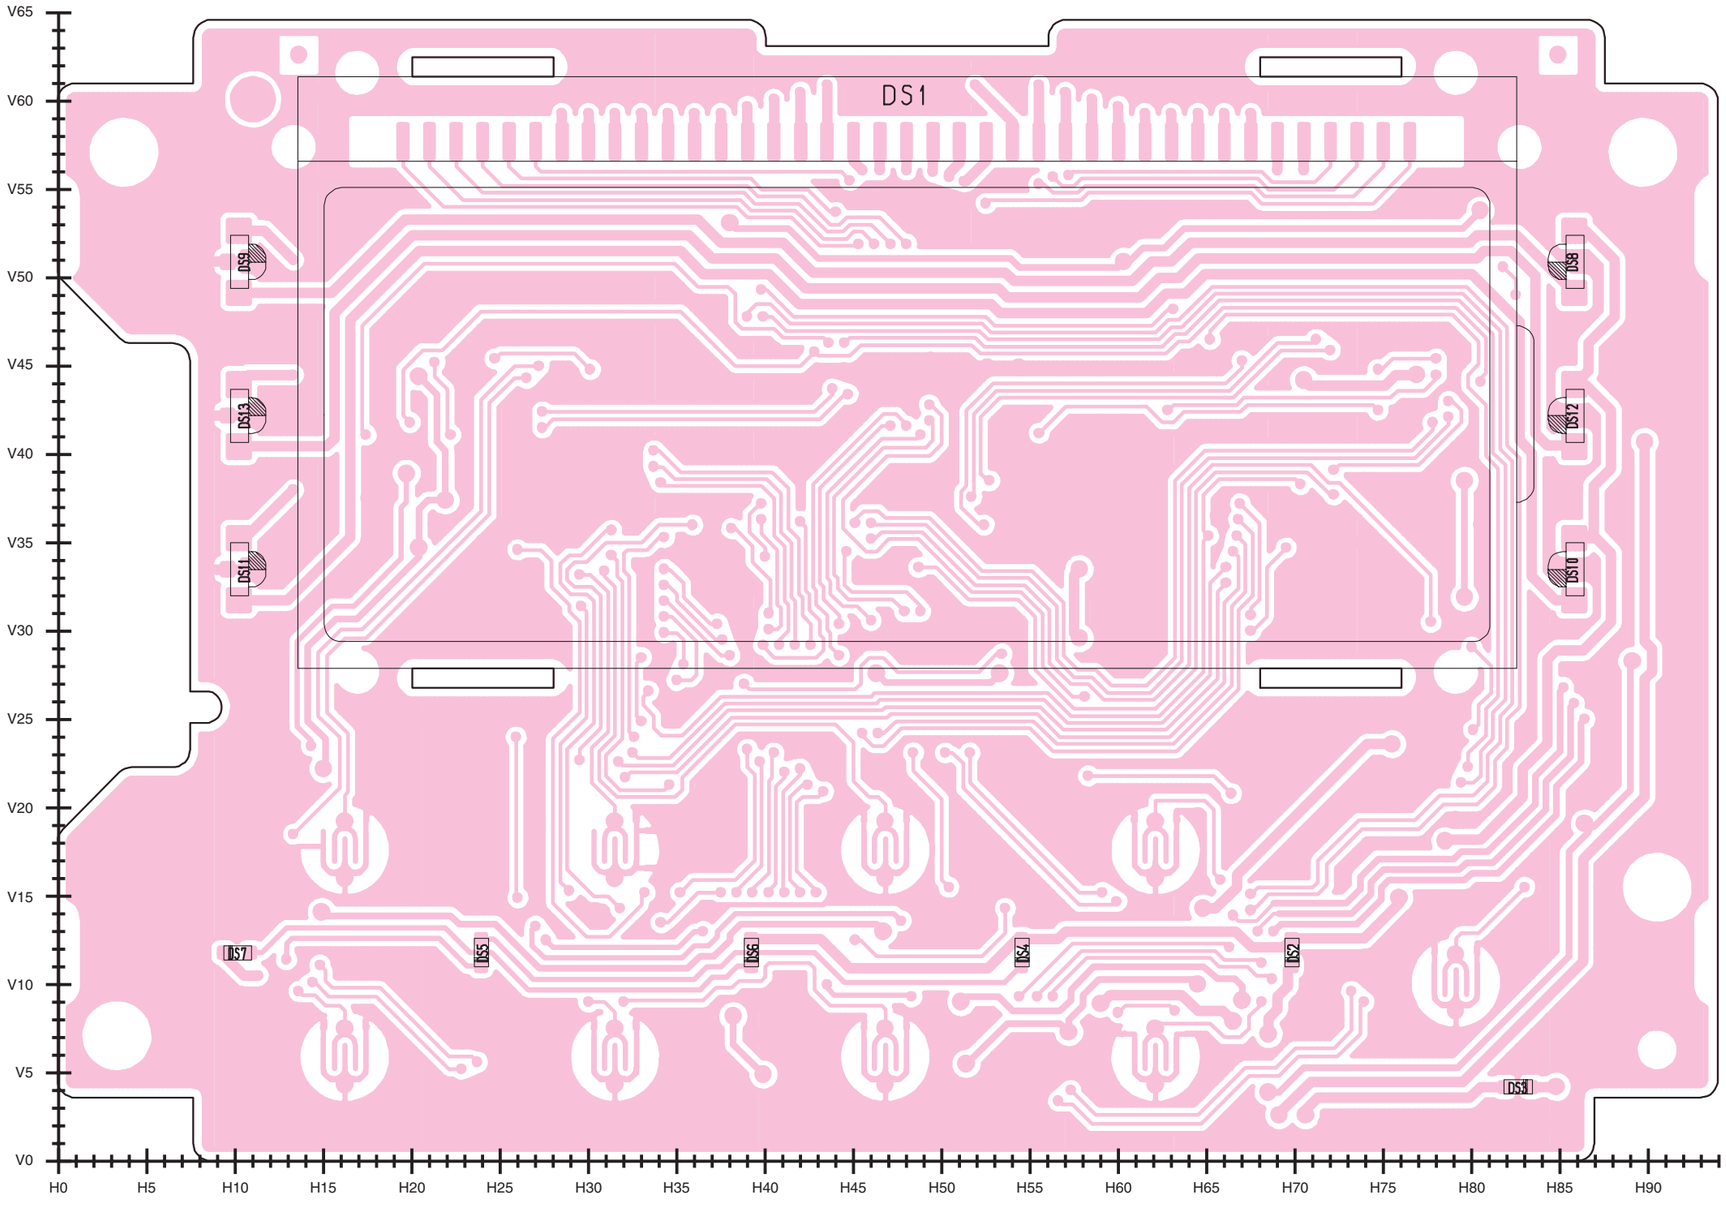

9-2 HM-150B/SW

• TOP VIEW

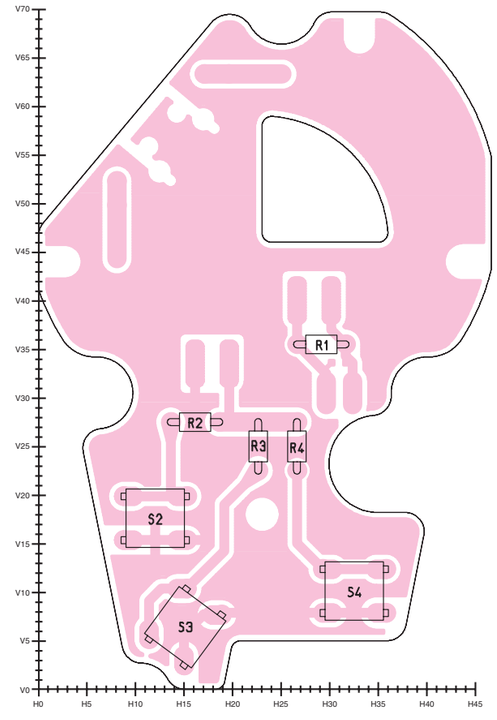

The combination of this page and the previous page shows the unit layout in the same configuration as the actual P.C. Board.

LOGIC BOARD
• BOTTOM VIEW

HM-150B/SW
• BOTTOM VIEW

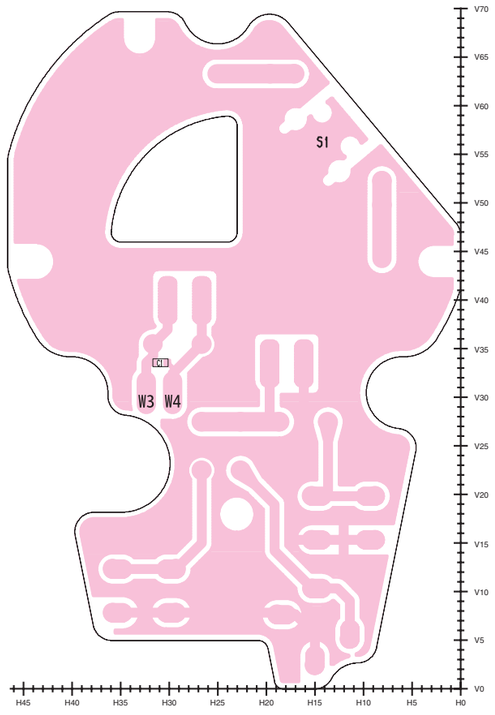

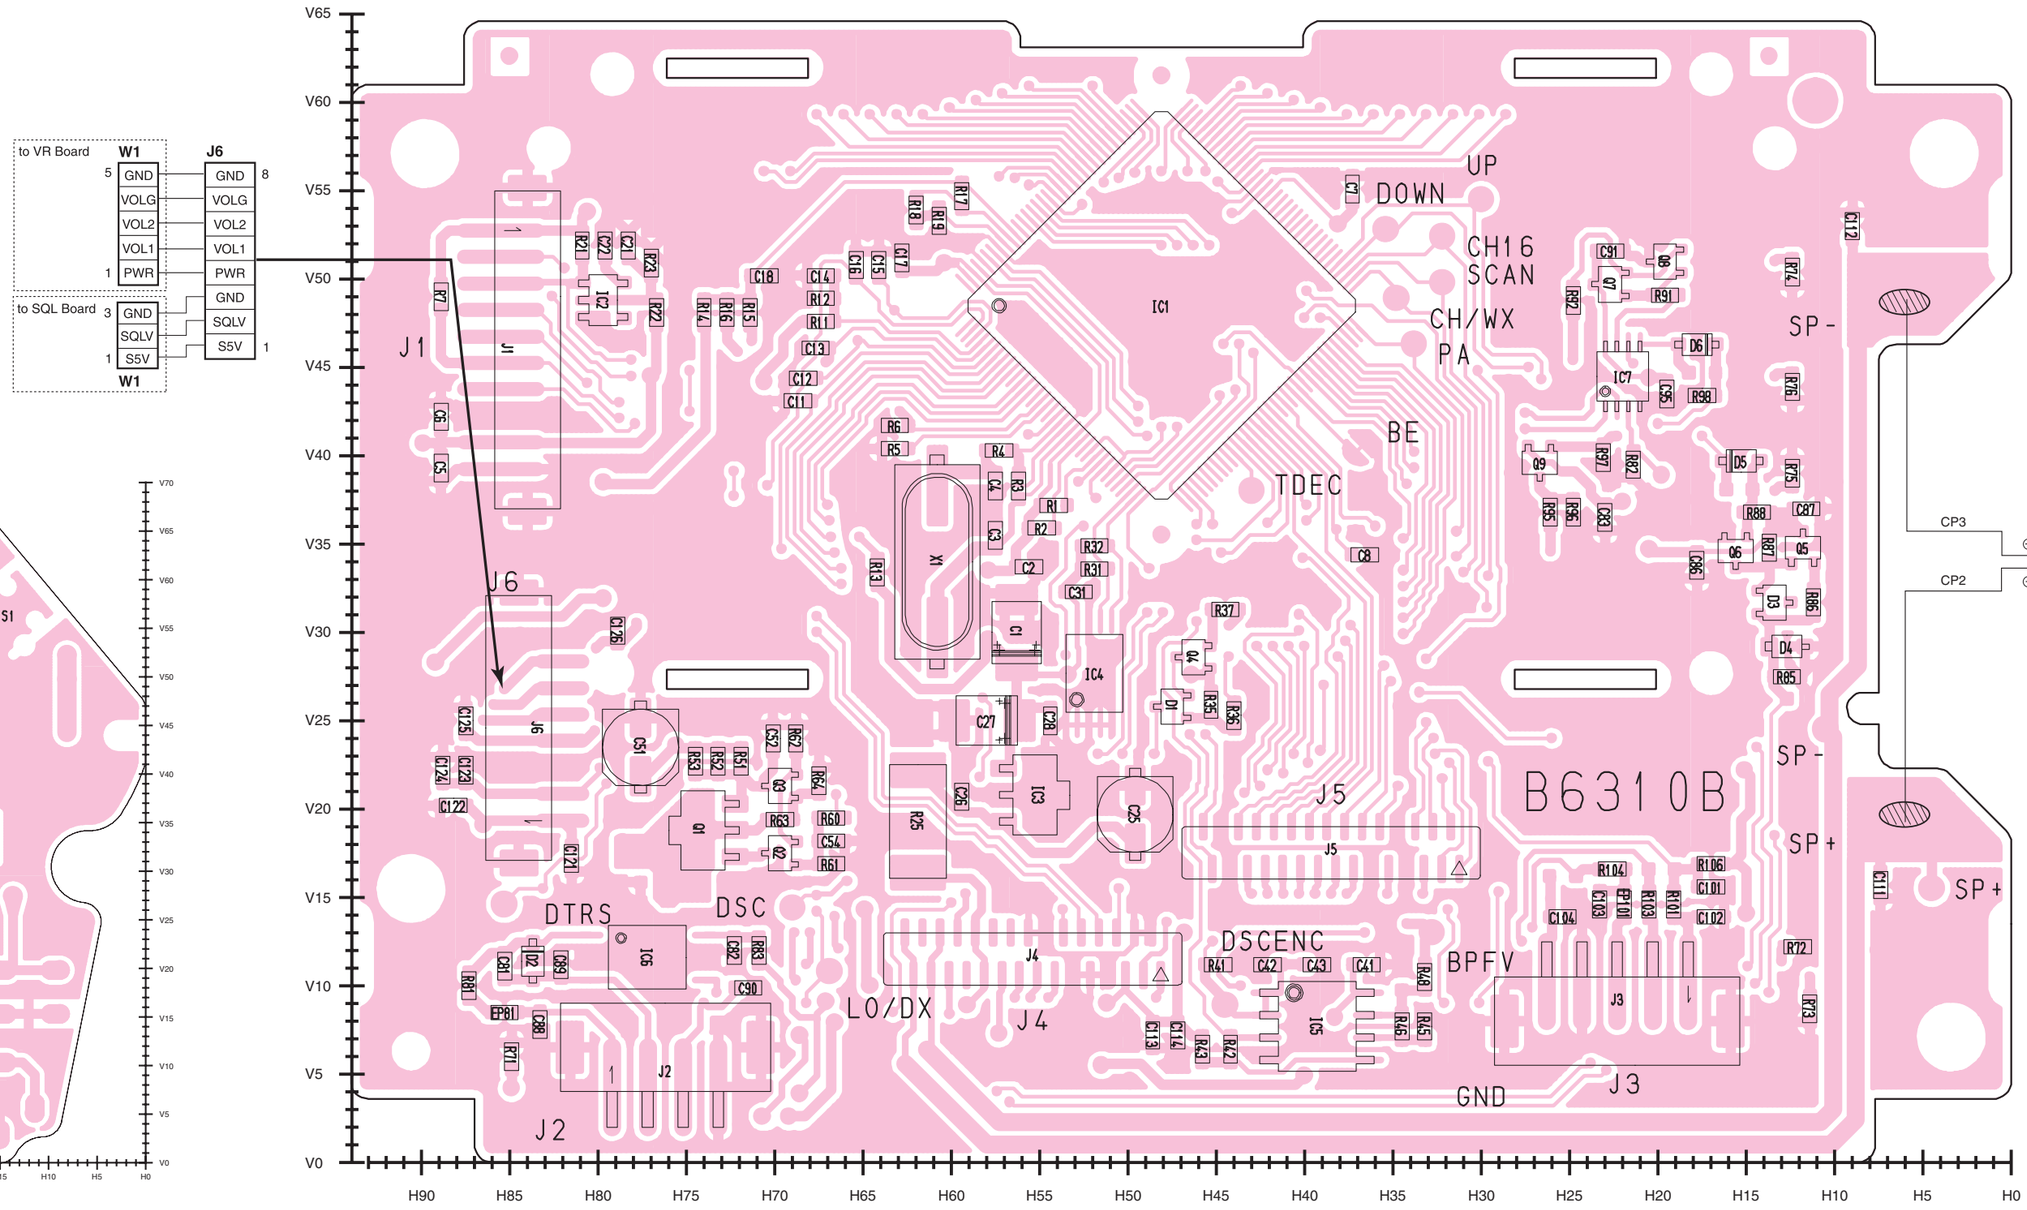

J2

1	NMEA+	NMEA-	NMEA0	GND 4
RED	SHIELD	WHITE	SHIELD	

to REAR CABLE

J4

30	SP+	-	SP-	PWRON	HV	-	-	GND	GND	DSCENC	WXDEC	DSDEC	ICF3	GND	GND 2
29	SP+	SP-	BEEP	-	HV	VCC	VOL1	VOL2	VOLG	GND	GND	GND	S5V	MIC1	MIC2 1

to MAIN Unit J4

J5

30	EVCK	GND	SEND	MMUTEM	RMUTES	MMUTES	MMUTEP	TMUTE	H/L	PTTM	PTTS	TXDET	GND	EXTTXO	UNLK	PSTB 2
29	EVDATA	GND	RCV	RMUTEM	RMUTES	RMUTEP	PAMUTE	ATT	BPFV	GND	SQL	GND	EXTRXD	PDATA	PCK 1	

to MAIN Unit J5

J3

5	KEYM	GND	MIC	MICG	PTT 1

to HM-150B/SW

The combination of this page and the next page shows the unit layout in the same configuration as the actual P.C.

9-5 MAIN UNIT
• TOP VIEW

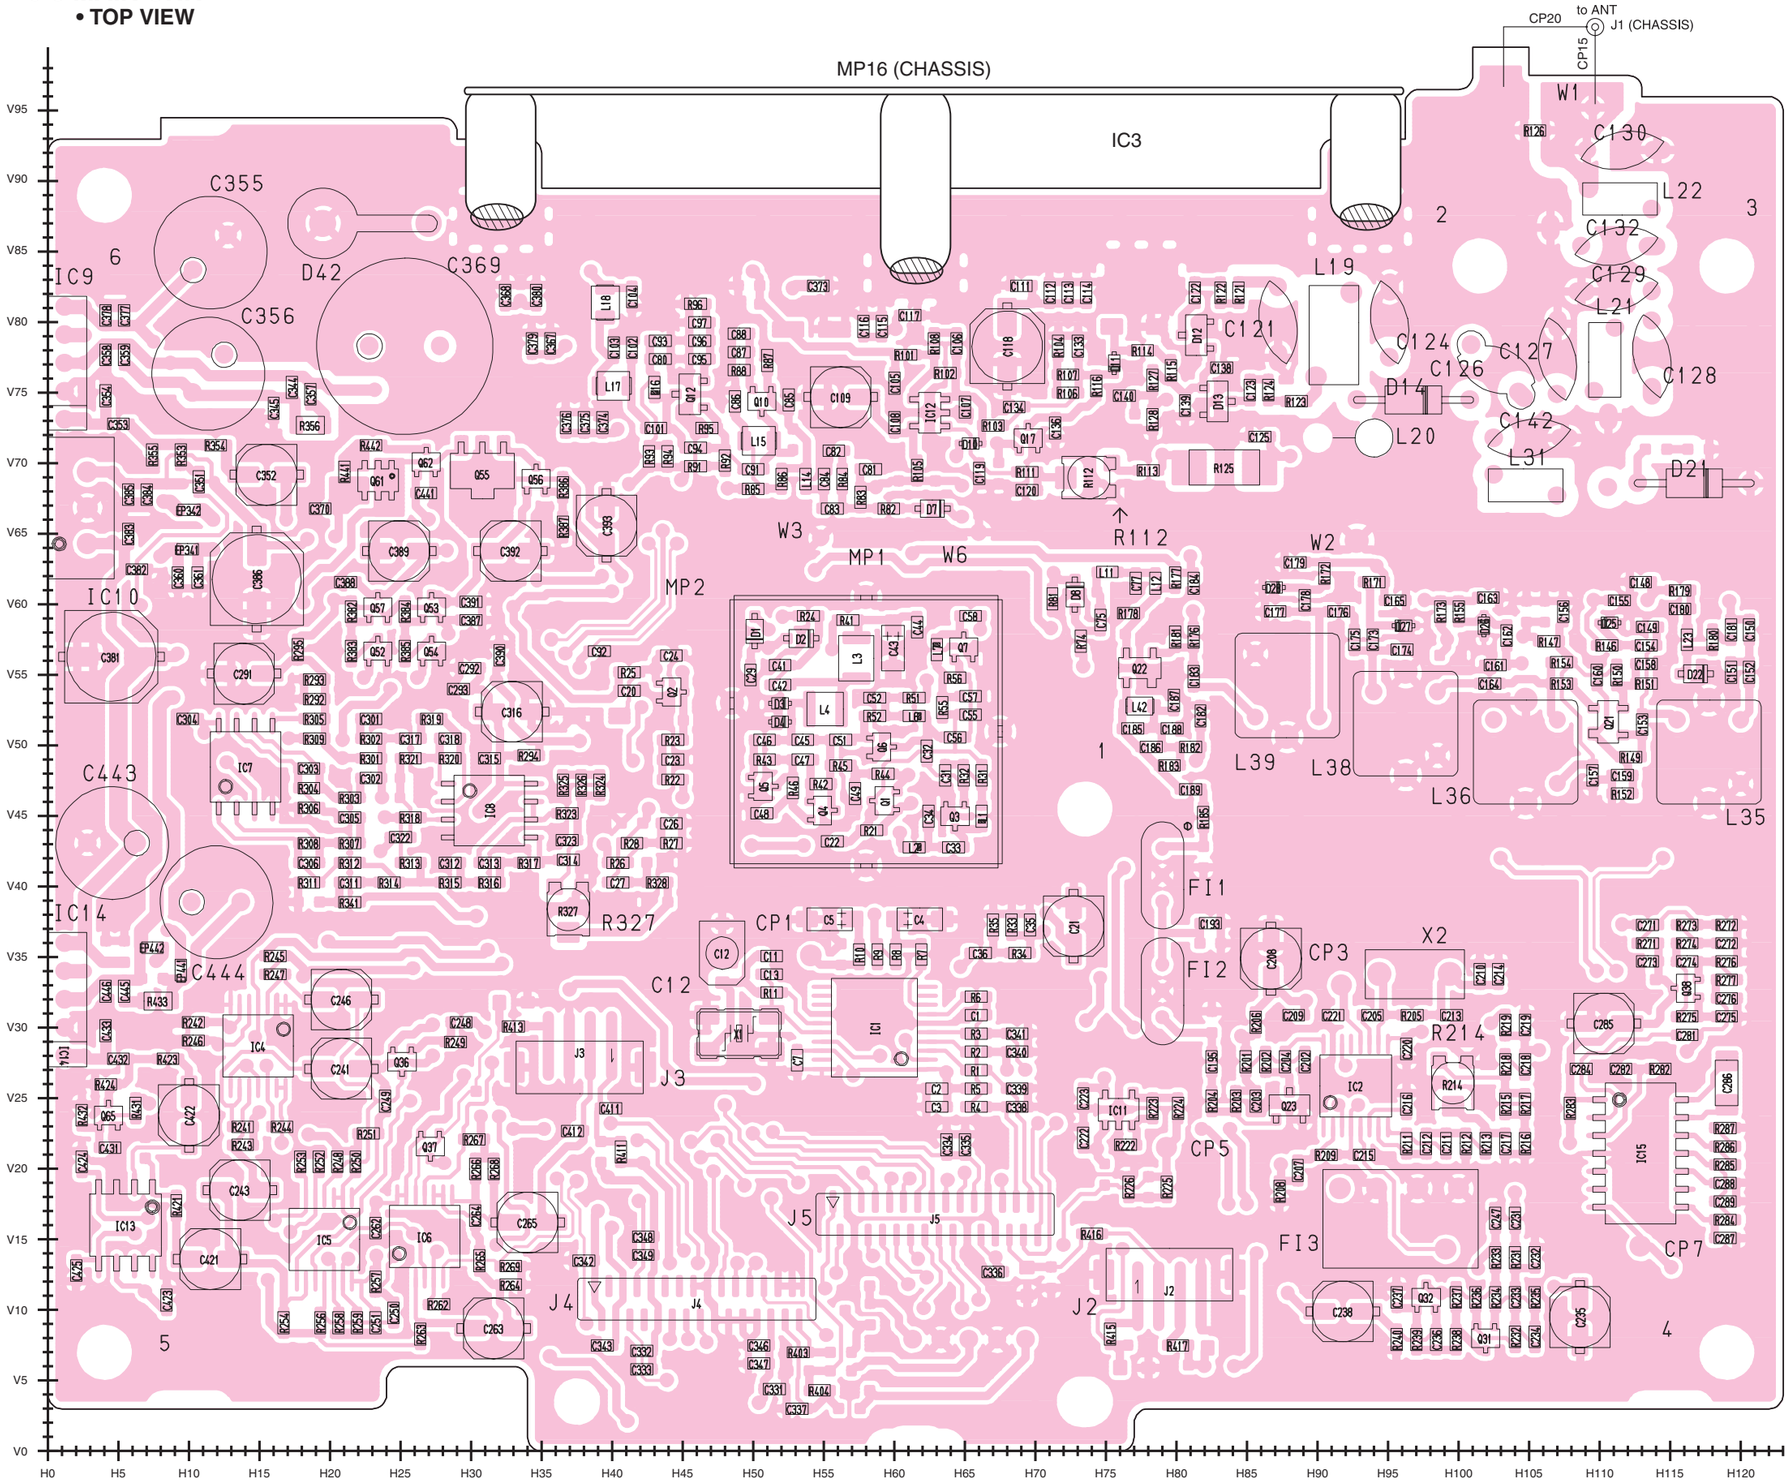

9-3 VR BOARD
• TOP VIEW



9-4 SQL BOARD
• TOP VIEW



J3

1				4
VCC	AF/MIC	MICG	PTTC	

to W2 (CHASSIS)

J4

1															29
SP+	SP-	PWRON	HV	-	-	GND	GND	DSCENC	WXDEC	DSDEC	ICF3	GND	GND		
SP+	SP-	BEEP	-	HV	VCC	VOL1	VOL2	VOLG	GND	GND	GND	SSV	MIC1	MIC2	30

to LOGIC Board J4

J5

1															29
EVCK	GND	SEND	MMUTEM	MMUTES	MMUTEP	TMUTE	H/L	PTTM	PTTS	TXDET	GND	EXTTXO	UNLK	PSTB	
EVDATA	GND	RCV	RMUTEM	RMUTES	RMUTEP	PAMUTE	ATT	BPFV	GND	SQL	GND	EXTRXD	PDATA	PCK	30

to LOGIC Board J5

J2

1				4
EXTTXD	EXTRXD	ICF3	GND	

to W2 (CHASSIS)

MAIN UNIT
• BOTTOM VIEW

The combination of this page and the previous page shows the unit layout in the same configuration as the actual P.C. Board.

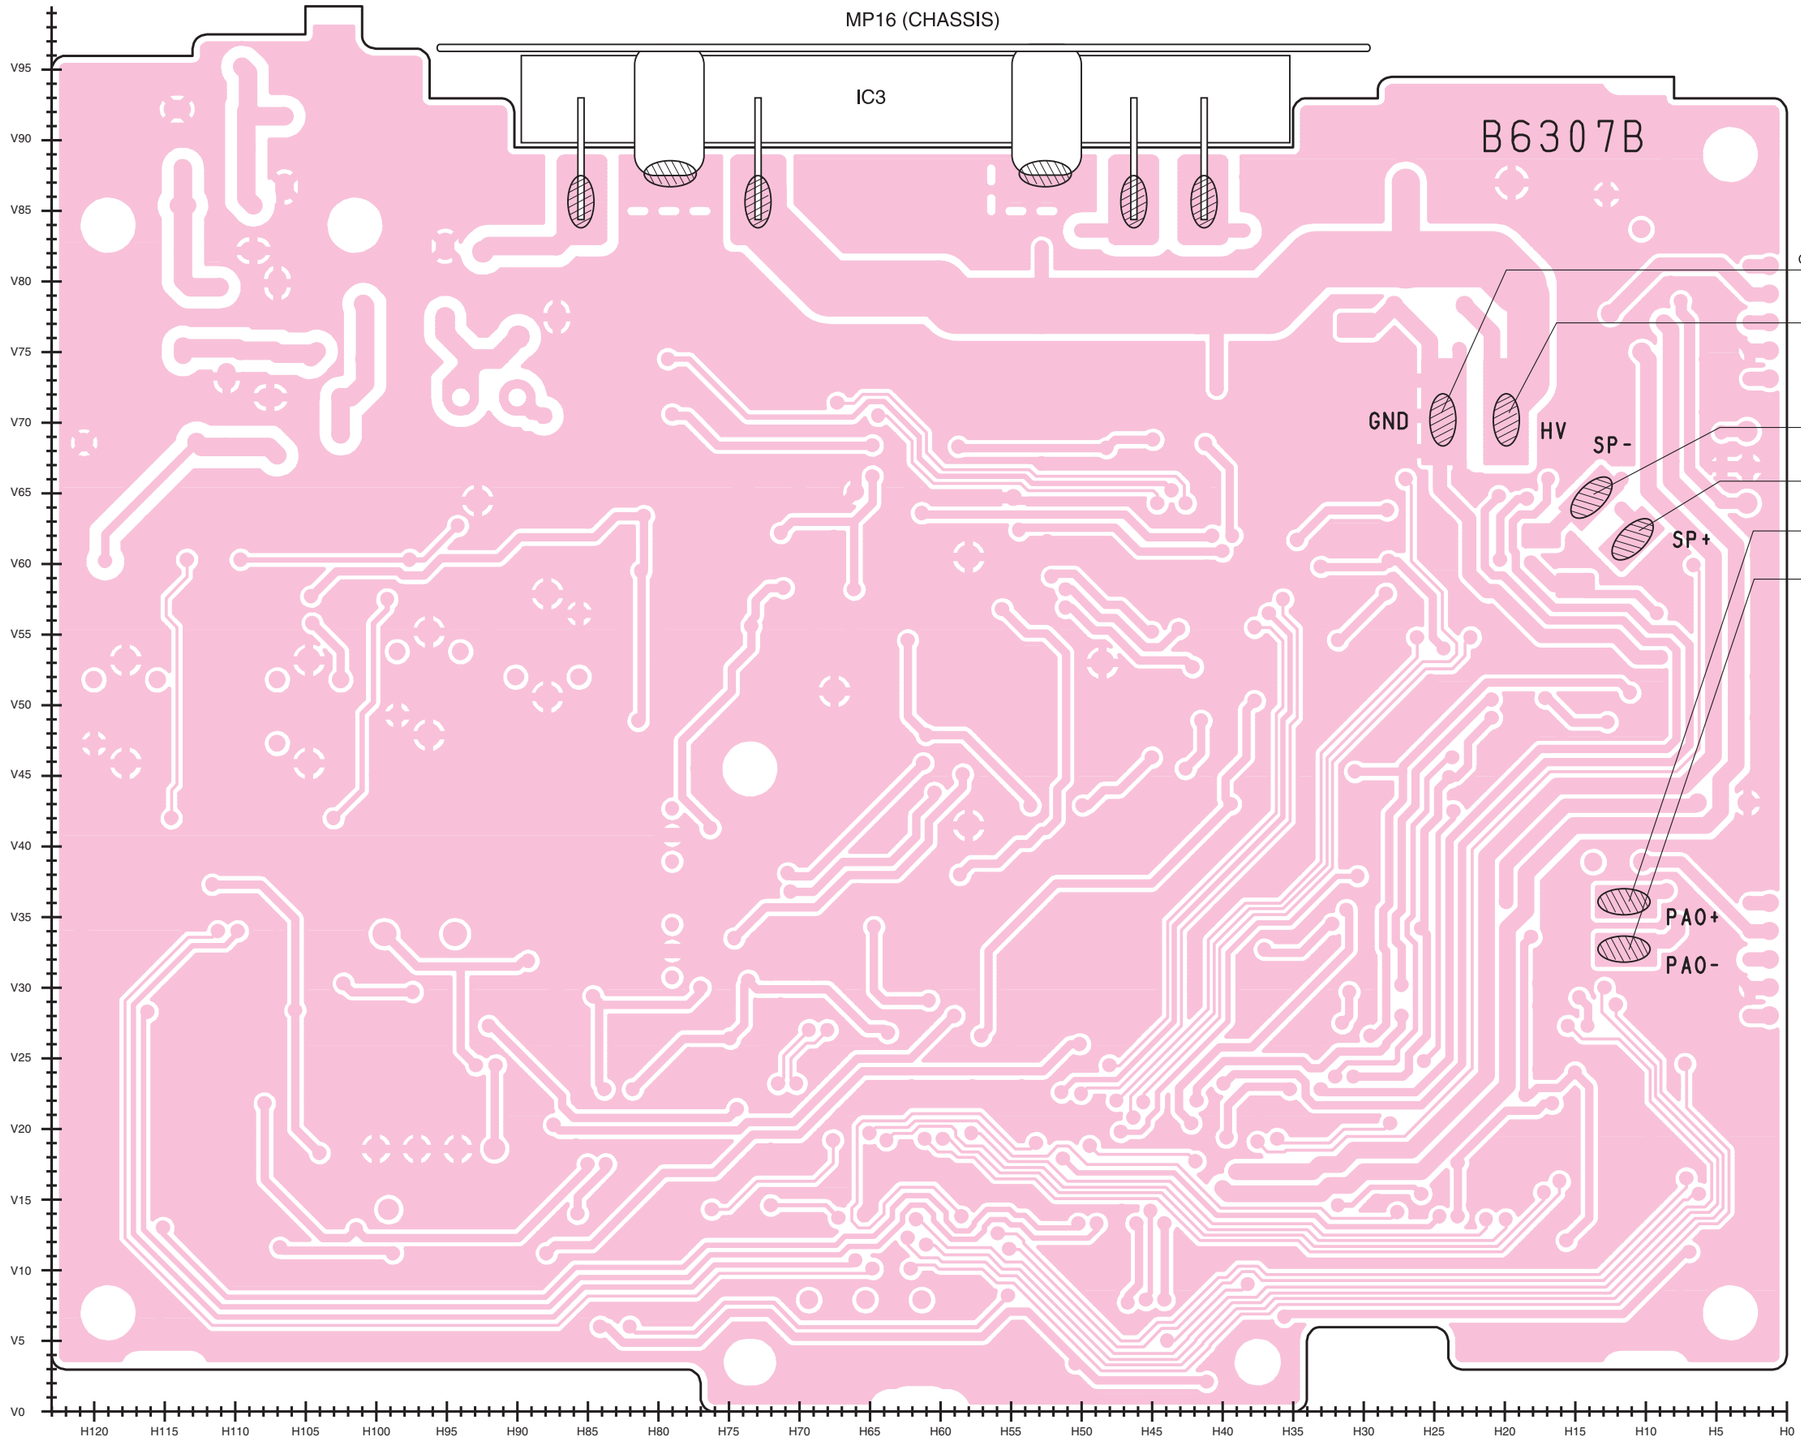

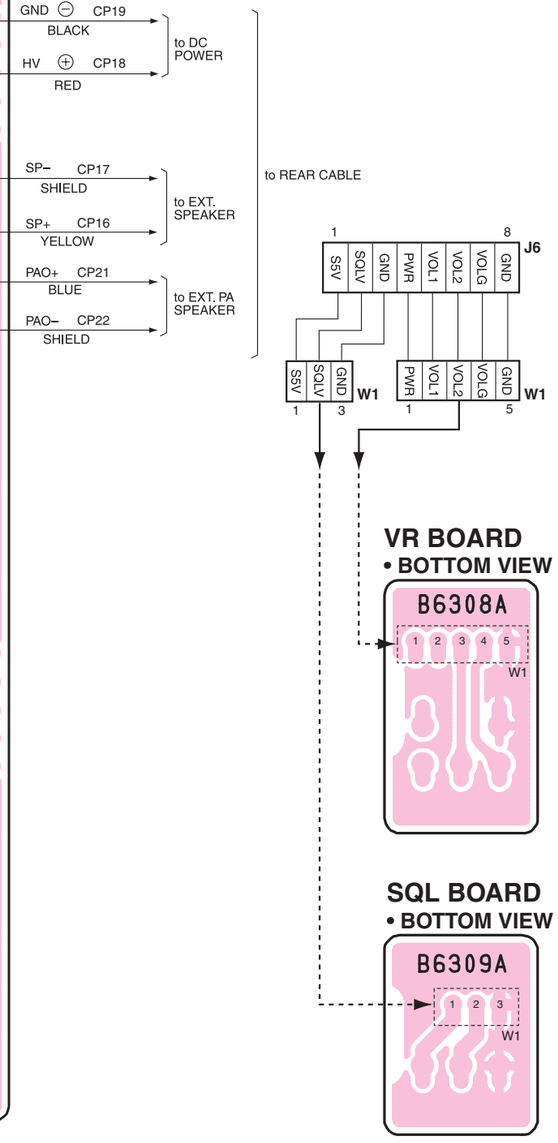

SECTION 10 BLOCK DIAGRAM

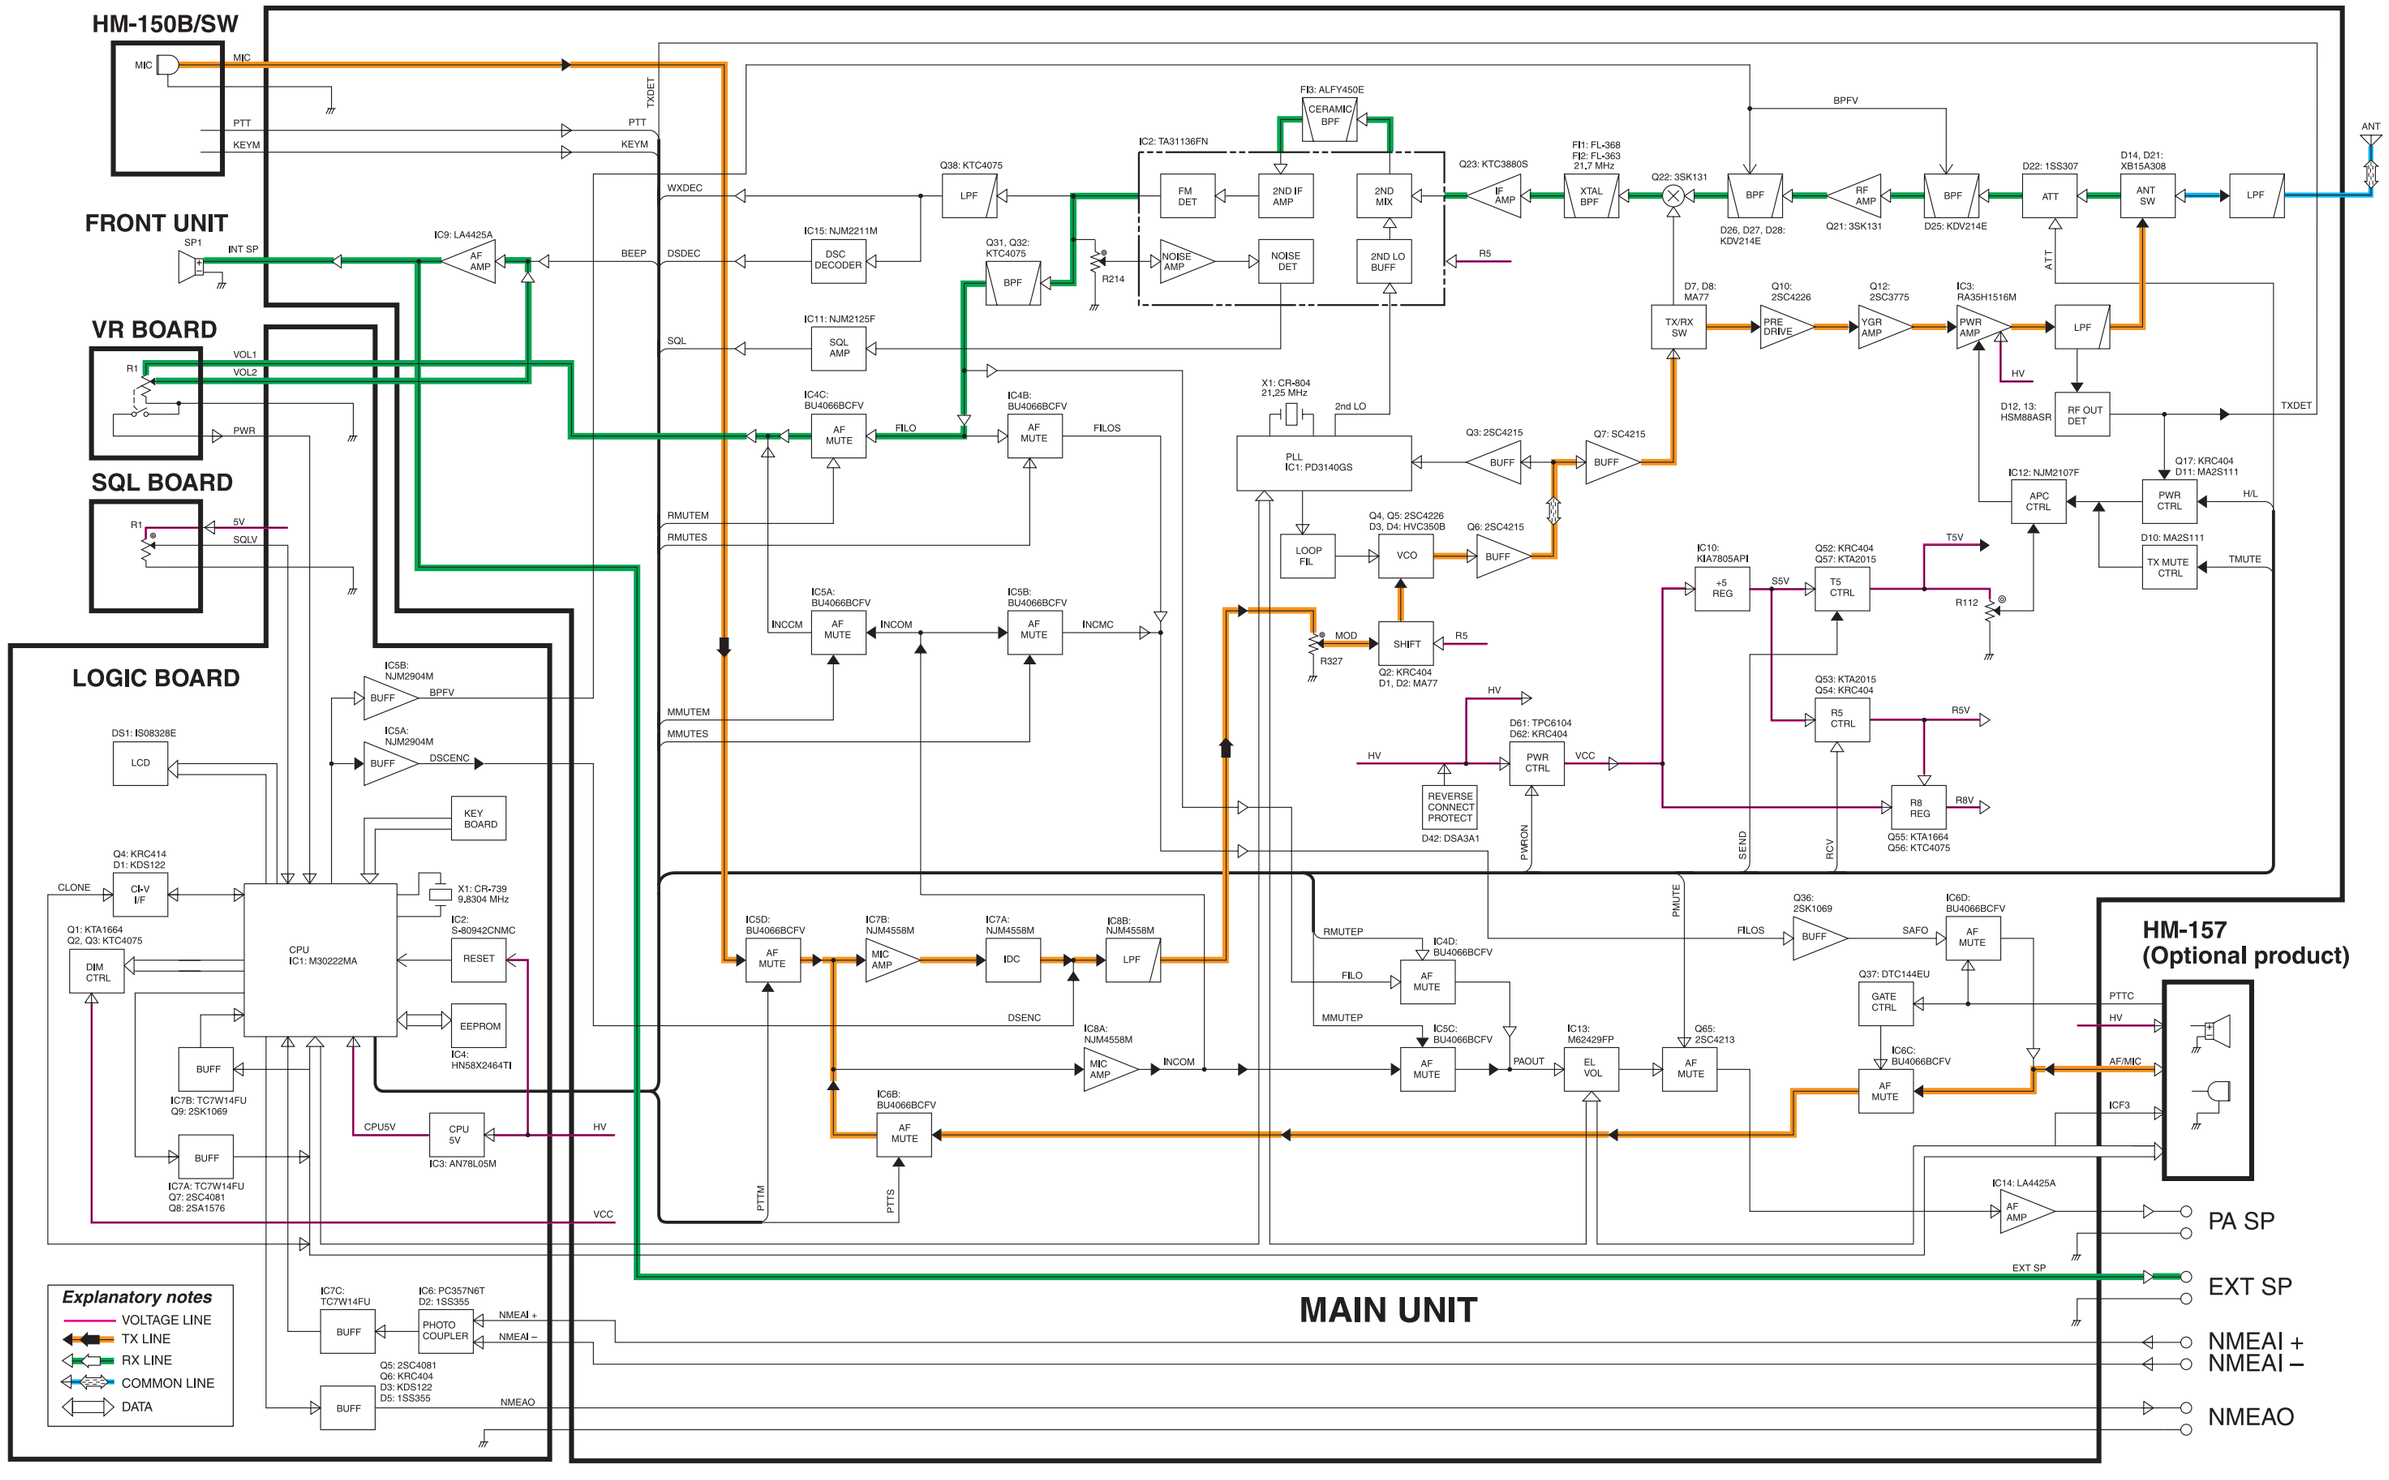

SECTION 11 VOLTAGE DIAGRAM

11-1 MAIN UNIT

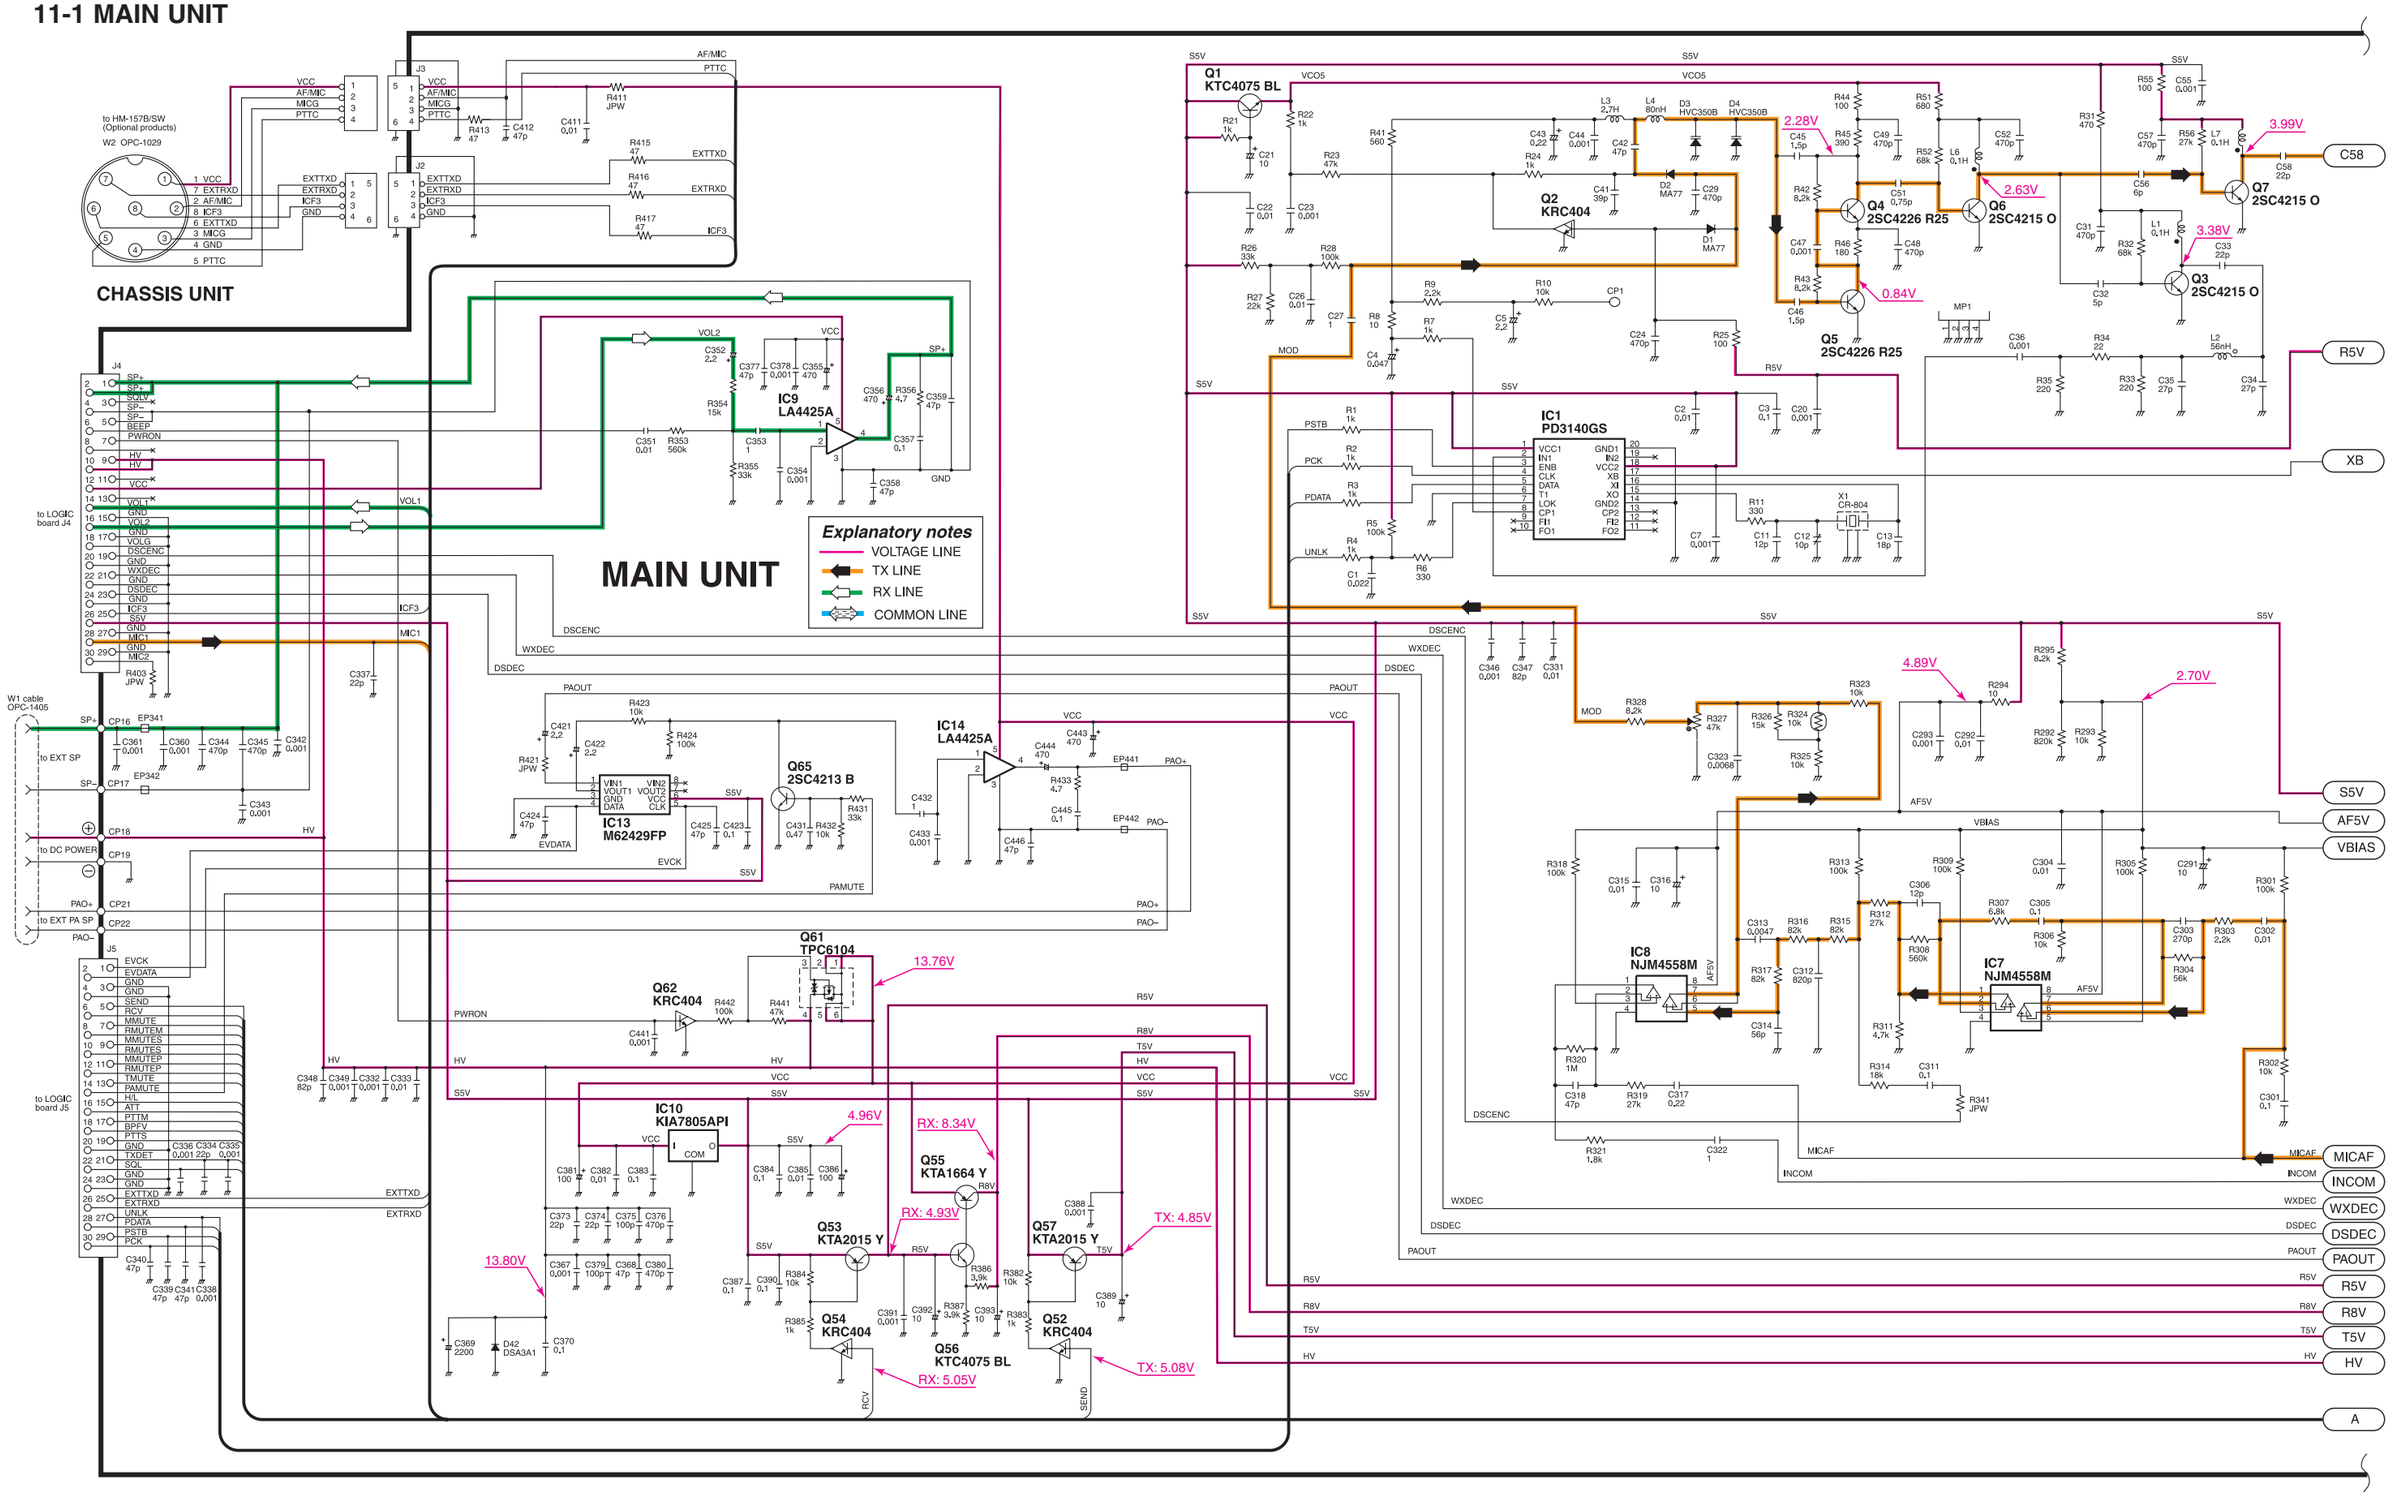

MAIN UNIT

Explanatory notes
- VOLTAGE LINE
- TX LINE
- RX LINE
- COMMON LINE

C58

Q10 2SC4226 R25

Q12 2SC3775 3

IC3 RA35H1516M-21 (RF INPUT, GATE BIAS, DRAIN BIAS, RF OUTPUT)

TX H: 3.12V L: 2.56V

IC12 NJM2107F

Q17 KRC404

TX H: 5.07V L: 0.00V

TX H: 2.07V L: 0.66V

to ANT

IC2 TA31136FN (OSCIN, OSCOUT, MIXOUT, VCC, IFIN, DEC, FILOUT, FILIN, MIXIN, GND, N-REC, N-DET, RSSI, IFOUT, QUAD, AFOUT)

3.52V

1.14V

Q23 KTC3880S Y

Q22 3SK131 L

Q21 3SK131 L

RX: 7.11V

RX: 3.89V

RX: 0.41V

IC11 NJM2125F

IC15 NJM2211M

2.17V

2.8V

Q38 KTC4075 BL

3.72V

1.50V

0.87V

0.91V

Q32 KTC4075 BL

Q31 KTC4075 BL

Q36 2SK1069 4

IC4 BU4066BCFV

IC5 BU4066BCFV

IC6 BU4066BCFV

Q37 DTA144EU

R5V
XB
S5V
AF5V
VBIAS
MICAF
INCOM
WXDEC
DSDEC
PAOUT
R8V
T5V
HV
A

11-2 LOGIC BOARD

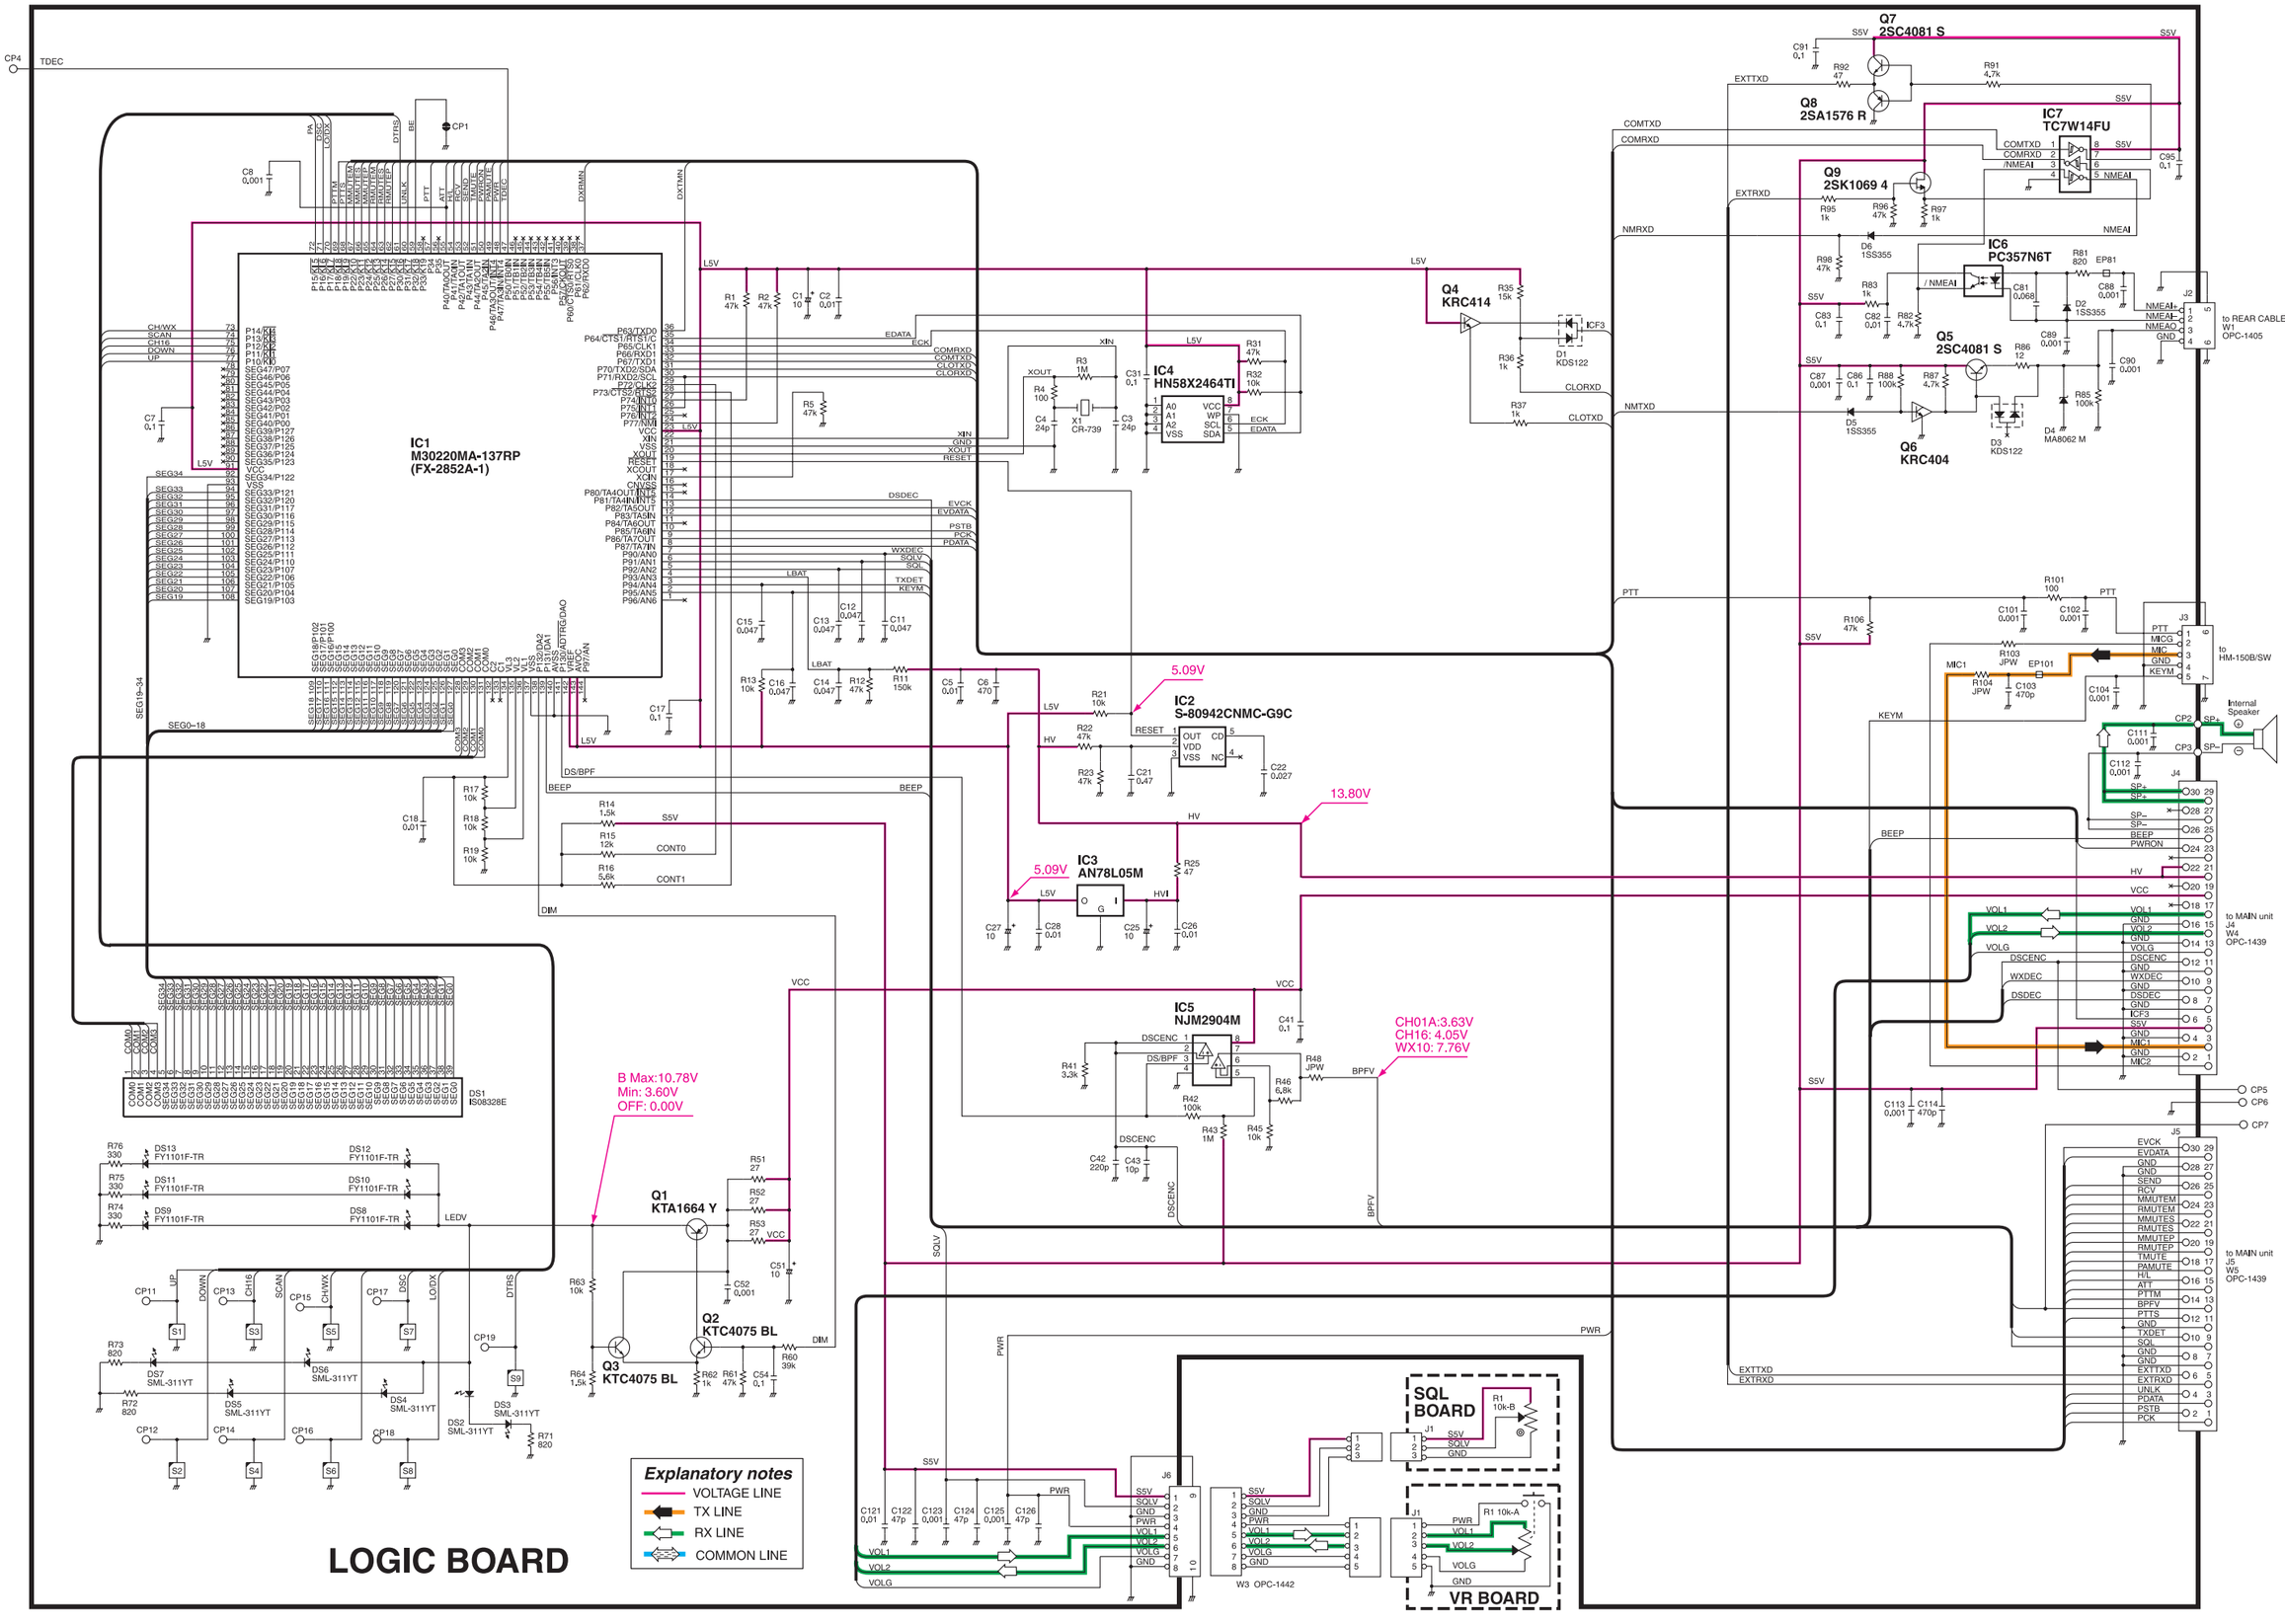

SECTION 12 HM-150B/SW

12-1 MECHANICAL PARTS AND DISASSEMBLY

[CHASSIS PARTS]

REF. NO.	ORDER NO.	DESCRIPTION		QTY.
W1	8900012212	Cable OPC-1249B	[HM-150B]	1
	8900013570	Cable OPC-1406	[HM-150SW]	1
MP1	8210020111	2715 front panel -1	[HM-150B]	1
	8210021061	2715 front panel (C)-1	[HM-150SW]	1
MP2	8210020120	2715 rear panel	[HM-150B]	1
	8210021240	2715 rear panel (C)	[HM-150SW]	1
MP3	8930060910	2715 key		1
MP4	8930060920	2715 PTT rubber		1
MP5	8930061970	2715 A-PTT holder		1
MP7	8930060930	2715 main seal		1
MP8	8930011600	2715 hanger knob		1
MP9	8610060951	2715 bush plate-1		1
MP10	8310060990	2715 MIC plate		1
MP11	8310061000	2715 MIC tape		1
MP12	8820061010	2715 A-MIC sheet		1
MP13	8850060960	O-ring (AY)		5
MP14	8930060970	O-ring (AZ)		1
MP15	8820001260	2715 screw 2.6 ×18 SUS		5
MP16	8810010230	Screw BiH M4 × 8 ZK		1
MP17	8850002000	Spring washer M4 SUS		1
MP19	8810010240	Screw PH B0 2 × 6 NI (BT)		3
MP20	8930061700	2715 PTT plate		1

Screw and washer abbreviations

B0, BT: Self-Tapping PH: Pan head
NI: Nickel SUS: Stainless
ZK: Black BiH: Bind head

[MAIN PARTS]

REF. NO.	ORDER NO.	DESCRIPTION	QTY.
MC1	7700002640	MIC KUC3523-040245	1

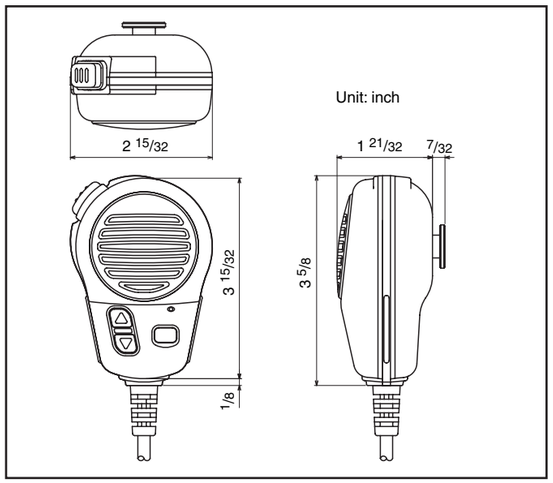

HM-150B/SW
UNIT abbreviations (C): CHASSIS PARTS, (M): MAIN UNIT

12-2 VOLTAGE DIAGRAM

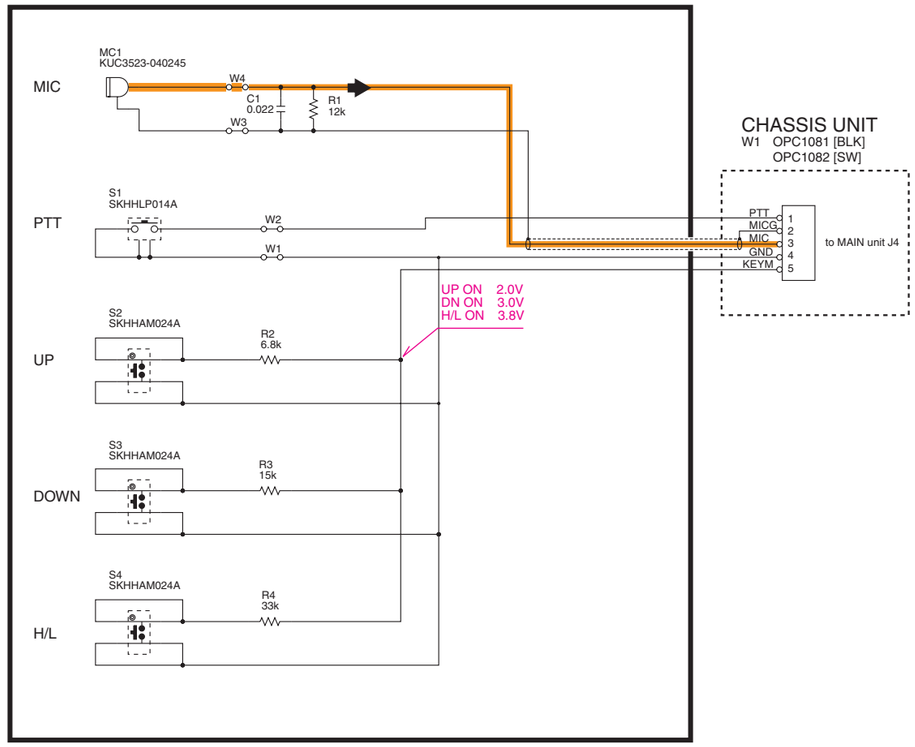

Icom Inc.

1-1-32, Kamiminami, Hirano-ku, Osaka 547-0003, Japan
Phone : +81 (06) 6793 5302
Fax : +81 (06) 6793 0013
URL : http://www.icom.co.jp/world/index.html

Icom America Inc.

<Corporate Headquarters>
2380 116th Avenue N.E., Bellevue, WA 98004, U.S.A.
Phone : +1 (425) 454-8155 Fax : +1 (425) 454-1509
URL : http://www.icomamerica.com
E-mail : sales@icomamerica.com
<Customer Service>
Phone : +1 (425) 454-7619

Icom Canada

Glenwood Centre #150-6165
Highway 17 Delta, B.C., V4K 5B8, Canada
Phone : +1 (604) 952-4266 Fax : +1 (604) 952-0090
URL : http://www.icomcanada.com
E-mail : info@icomcanada.com

Icom (Australia) Pty. Ltd.

A.B.N. 88 006 092 575
Unit 1 / 103 Garden Road, Clayton VIC 3168 Australia
Phone : +61 (03) 9549-7500 Fax : +61 (03) 9549-7505
URL : http://www.icom.net.au
E-mail : sales@icom.net.au

Icom New Zealand

146A Harris Road, East Tamaki,
Auckland, New Zealand
Phone : +64 (09) 274 4062 Fax : +64 (09) 274 4708
URL : http://www.icom.co.nz
E-mail : inquiries@icom.co.nz

Beijing Icom Ltd.

Room C07, 10th Floor, Long Silver Mansion, No. 88,
Yong Ding Road, Haidian District, Beijing, 100039, China
Phone : +86 (010) 5889 5391/5392/5393
Fax : +86 (010) 5889 5395
URL : http://www.bjicom.com
E-mail : bjicom@bjicom.com

Icom (Europe) GmbH

Communication Equipment
Himmelgeister Str. 100, D-40225 Düsseldorf, Germany
Phone : +49 (0211) 346047 Fax : +49 (0211) 333639
URL : http://www.icomeurope.com
E-mail : info@icomeurope.com

Icom Spain S.L

Crta. de Gracia a Manresa Km. 14,750
08190 Sant Cugat del Valles Barcelona, SPAIN
Phone : +34 (93) 590 26 70 Fax : +34 (93) 589 04 46
URL : http://www.icomspain.com
E-mail : icom@icomspain.com

Icom (UK) Ltd.

Unit 9, Sea St., Herne Bay, Kent, CT6 8LD, U.K.
Phone : +44 (01227) 741741 Fax : +44 (01227) 741742
URL : http://www.icomuk.co.uk
E-mail : info@icomuk.co.uk

Icom France S.a

Zac de la Plaine, 1, Rue Brindejonc des Moulinais
BP 5804, 31505 Toulouse Cedex, France
Phone : +33 (5) 61 36 03 03 Fax : +33 (5) 61 36 03 00
URL : http://www.icom-france.com
E-mail : icom@icom-france.com

Asia Icom Inc.

6F No.68, Sec. 1 Cheng-Teh Road, Taipei, Taiwan, R.O.C.
Phone : +886 (02) 2559 1899 Fax : +886 (02) 2559 1874
URL : http://www.asia-icom.com
E-mail : sales@asia-icom.com

Icom Polska

Sopot, 3 Maja 54 Poland
Phone : +48 (58) 550 7135 Fax : +48 (58) 551 0484
E-mail : icompolska@icompolska.com.pl

Count on us!

Icom Inc.
1-1-32, Kamiminami, Hirano-ku, Osaka 547-0003, Japan

S-14131MZ-C1
© 2005 Icom Inc.